

sinclair

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

Spectrum 128

Service Manual

USE SPECTRUM CIRCUITS.

SERVICING MANUAL

FOR

SPECTRUM 128 ©

LIST OF CONTENTS

SECTION 1	INTRODUCTION
SECTION 2	SYSTEM DESCRIPTION
SECTION 3	SETTING UP AND SYSTEM TEST
SECTION 4	FAULT FINDING AND REPAIR
SECTION 5	PARTS LISTS

LIST OF ILLUSTRATIONS

	Fig No
Spectrum 128 Block Diagram	1.1
Uncontended RAM RAS/CAS Timing	1.2
Keyboard Upper Membrane	1.3
Keyboard Lower Membrane	1.4
Spectrum 128 Logic Circuit	1.5
System 128 Analogue Circuit	1.6
Keypad Circuit	1.7
Test Oscillograms	4.1
Spectrum 128 PCB Component Layout	5.1
Keypad PCB Component Layout	5.2

Prepared by BRAVEMAY LTD
for SINCLAIR RESEARCH LTD

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

(i)

SR1AAA

SERVICE MANUAL 128

X-1223

SECTION 1
SYSTEM DESCRIPTION

Sub-Section	LIST OF CONTENTS	Page No.
1	Introduction	1.1
2	Architecture	1.3
3	Z80A CPU	1.3
4	Memory Organisation	1.5
	Read/Write Operations and Bus Arbitration	1.8
5	Input/Output	1.11
	TV Picture Generation and Sound Output	1.11
	Keyboard Scanning	1.13
	Tape Interface	1.16
	Programmable Sound Generator	1.17
	RS232C/MIDI Interface	1.18
	Keypad Scanning	1.19
6	Power Supplies	1.22
Fig	ILLUSTRATIONS	
1.1	Spectrum 128 Block Diagram	1.2
1.2	Uncontended RAM RAS/CAS Timing	1.10
1.3	Keyboard Upper Membrane	1.14
1.4	Keyboard Lower Membrane	1.15
1.5	Spectrum 128 Logic Circuit	1.23
1.6	Spectrum 128 Analogue Circuit	1.24
1.7	Keypad Circuit	1.25

1. INTRODUCTION

- 1.1 The Spectrum 128 is a derivative of the 48K Spectrum Plus offering 128K of RAM, music quality sound, greatly improved video quality and higher hardware reliability.
- 1.2 The firmware is capable of running in Spectrum 48K mode or, alternatively in 128K mode, which will support paged memory in the form of a RAM disk. Extended BASIC to handle the sound facility is provided, and a full screen editor is incorporated in the firmware.

1.3 A list of the principle features appears below:

- (a) 128K dynamic RAM
- (b) 32K ROM
- (c) Numeric keypad
- (d) TV sound with composite video
- (e) Elimination of dot crawl (single crystal operation)
- (f) RGB output
- (g) RS232 serial port
- (h) Musical instrument digital interface (MIDI)
- (j) Software compatible with all previous Spectrums
- (k) Edge connector compatible with Spectrum.

2. ARCHITECTURE

2.1 The architecture of the Spectrum 128 shown in Figure 1.1 is typical of many microcomputer systems is that it comprises a single microprocessor chip (in this instance a Z80A or u780), a read only memory (ROM) a paged random access memory (RAM) and an input-output section. The latter handles the keyboard input, tape and TV display functions using the logic gate array (ULA IC1), and the keypad input, sound and RS232/MIDI interfaces using the sound generator circuit IC32.

2.2 The analogue circuits (not shown) generate the 17.7 MHz master clock, and process the RGB colour monitor and sound signals. The resultant outputs are suitable for use with colour (RGB) or black and white monitors, and domestic UHF television receivers. A modulated sound carrier is output with the composite video.

2.3 The computer is built on a single printed circuit board which also includes a regulated power supply fed from an external 9V power pack. The keyboard matrix is part of the upper case assembly and is connected to the board via two ribbon cables KB1 and KB2. A digital keypad is also provided, connected via a flexible cable. It can be used as a games controller or calculator pad and has special function keys for use with the full screen editor. An in-built peripheral interface controller (PIC) performs the keypad scanning routines and delivers an output to the Z80 on demand.

3. Z80A CPU

3.1 The Z80A is an 8-bit single chip central processing unit (CPU). It is clocked at 3.5 MHz from a divide of an external source controlled by the logic gate array (ULA) and has a standard three bus input/output arrangement. These buses are the data Bus, Address Bus and Control Bus respectively.

- 3.2 **Data Bus.** D7-D0 constitutes an 8-bit bi-directional data bus with active high, tri-state input/outputs. It is used for data exchanges with the memory, sound chip and the ULA.
- 3.3 **Address Bus.** A15-A0 constitutes a 16-bit address bus with active high, tri-state outputs. The address bus provides the address for memory data exchanges and for data exchanges with the ULA. It is also used during the interrupt routine (see below) when scanning the keyboard matrix.
- 3.4 **Control Bus.** The control bus is a collection of individual signals which generally organise the flow of data on the address and data buses. The block diagram only shows five of these signals although others of minor importance are made available at the expansion port (see Figure 1.5 for details).
- 3.5 Starting with memory request ($\overline{\text{MREQ}}$), this signal is active low indicating when the address bus holds a valid address for a memory read or memory write operation. Input/Output request ($\overline{\text{IORQ}}$) is also active low but indicates when the address bus holds a valid address for I/O read/write operations.
- 3.6 The read and write signals ($\overline{\text{RD}}$ and $\overline{\text{WR}}$) are active low, and one or other is active indicating that the CPU wants to read or write data to a memory location or I/O device. All the control signals discussed so far are active low, tri-state outputs.
- 3.7 The last control signal described here is the maskable interrupt ($\overline{\text{INT}}$). This input is active low and is generated by the ULA once every 20 ms. Each time it is received the CPU 'calls' the 'maskable interrupt' routine during which the real-time clock is incremented and the keyboard and keypad scanned.
- 3.8 **CPU Clock.** Returning to the CPU clock mentioned earlier in this section, the ULA is able to inhibit this input bringing the CPU to a temporary halt. This mechanism gives the ULA absolute priority, allowing it to access the contended RAM without interference from the CPU (see RAM description). Switching transistor TR3 ensures that the clock amplitude is +5V rather than some arbitrary TTL level. This is essential if the CPU is to operate effectively while executing fast machine code programs of the 'space invader' type.
- 3.9 **Dynamic Memory Refresh.** The CPU incorporates built-in dynamic RAM refresh circuitry. As part of the instruction OP code fetch cycle, the CPU performs a memory request after first placing the refresh address on the lower eight bits of the address bus. At the end of the cycle the address is incremented so that over 255 fetch cycles, each row of the dynamic RAM is refreshed.

4.3 The Z80 address space is allocated according to the two m.s. bits of the address bus (ZA14,15) and the contents of the bank register IC31 which is at address 7FFD_H in the Z80's I/O space. The significance of the register bits is summarised below:

Bits	Function
B2-B0	Selects the page occupying the top 16K of the Z80 address space. Any RAM page can occupy the space.
B3	Instructs the ULA to access the display mapped in page 5 or 7. Bit set : screen in page 7 Bit clear : screen in page 5
B4	Determines whether instruction fetches are from ROM 0 or ROM 1* Bit set : fetches from the 48K Spectrum ROM (ROM 1) Bit clear : fetches from the 128K Spectrum ROM (ROM 0)
B5	Set to prevent further accesses to the bank register (protection against SPECTRUM programs crashing if the bank register is written to in error)

* see para. 4.12.2


4.4 Clearly, dependent on register bits B2-B0, the Z80 can access page 2 at address 8000_H or C000_H and the screen in page 5 at address 4000_H or C000_H. The screen in page 7 can only be accessed at address C000_H. On power up, or after reset the bank register is cleared and loads page 0 at address C000_H, selects the 128K Spectrum ROM at address 0000_H and informs the ULA that screen accesses are from page 5.

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554


This mechanism only applies to the non-contended RAM area. An alternative refresh method is adopted for the contended RAM.

4. MEMORY ORGANISATION

4.1 The Spectrum 128 has 160K bytes of addressable memory - a 32K byte ROM (IC5) and 128K bytes of dynamic RAM (IC6-IC22). The latter is organised as eight 16K byte pages as indicated below.

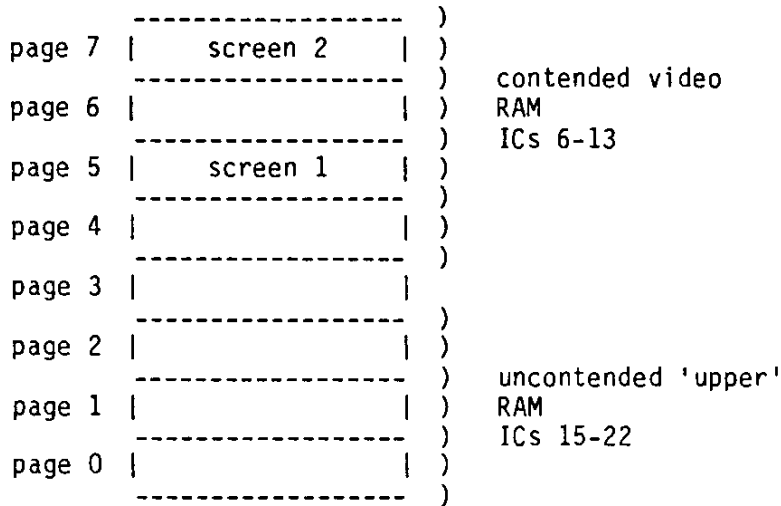

4.2 Pages 0-3 are uncontended and are accessed solely by the Z80. Pages 4-7 are contended in that the Z80 and ULA IC1 both require access to pages 5 and 7 in order to generate the memory mapped displays. The address of any page of RAM depends on where it appears in the address space of the Z80 which is structured as follows:

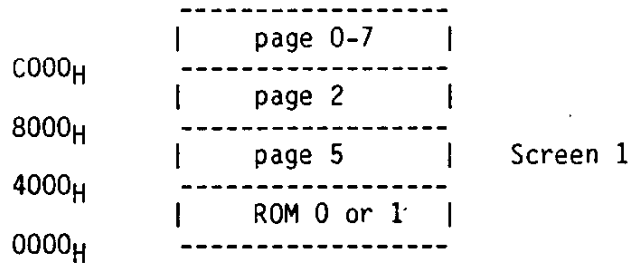

SECTION 5
PARTS LIST

Sub-Section	LIST OF CONTENTS	Page No
1	Introduction	5.1
2	Notes to Table 5.2	5.1
Fig	ILLUSTRATIONS	
5.1	Spectrum 128 PCB Component Layout	5.10
5.2	Keypad PCB Component Layout	5.11

1. INTRODUCTION

1.1 Parts lists for the SPECTRUM 128 are provided in table form; one for the case assembly (Table 5.1), one for the main pcb assembly (Table 5.2) and another for the keypad pcb assembly (Table 5.3). PCB layout diagrams are given in Figures 5.1 and 5.2 ;the notes to be found in Table 5.2 are explained below.

2. NOTES TO TABLE 5.2

- (1) All RAM chips should have 150ns access time and 128 row refresh. This includes parts from the following manufacturers: Hitachi, Intel, Mitsibushi, Mostek, Motorola, NEC, OKI, Panasonic, Toshiba and National.
- (2) If TR3 is type KSC839, resistor R24 should be 15K0.
- (3) Provision has been made on the pcb for a 2 to 22pF film dielectric trimmer should the need arise.
- (4) The ROM should be pin compatible with a 27256 EPROM and have an address access time of less than 400 ns. The output enable access time should be less than 250 ns.
- (5) The crystal is series resonant with 20pF and accurate to 10 ppm absolute, ± 10 ppm 20 to 60°C, ± 5 ppm per year.
- (6) If preferred, the 20uF capacitor used for C124 may be split into two parallel capacitors of 10 pF $\pm 2\%$ in the positions C124 and C130.
- (7) For FTZ (German) version only.
- (8) 6.0 MHz version (Type No ?) for use in the UK; 5.5 MHz version (Type No ?) for use in most other European countries.

4.5 All memory accesses are controlled by the programmable logic array (PAL) IC29. It does this by decoding the two m.s. Z80 address bits Z15, Z14 with bits B2-B0 from the bank register to produce three pairs of supplementary address lines. They are:

- (a) UA15,14 specifying the page number in the uncontended RAM space
- (b) VA15,14 specifying the page number in the contended RAM space
- (c) ULA15,14 controlling bus arbitration and Z80 access to the ROM and contended RAM space.

4.6 The decodes are summarised below and described in the following paragraphs.

Z80 operation	ZA15	ZA14	B2	B1	B0	ULA15	ULA14	VA15	VA14	UA15	UA14
ROM access	0	0	X	X	X	0	0	X	X	X	X
4000 _H -7FFF _H	0	1	X	X	X	0	1	0	1	X	X
8000 _H -8FFF _H	1	0	X	X	X	1	0	X	X	1	0
page 0 access	1	1	0	0	0	1	X	X	X	0	0
page 1 access	1	1	0	0	1	1	X	X	X	0	1
page 2 access	1	1	0	1	0	1	X	X	X	1	0
page 3 access	1	1	0	1	1	1	X	X	X	1	1
page 4 access	1	1	1	0	0	0	1	0	0	X	X
page 5 access	1	1	1	0	1	0	1	0	1	X	X
page 6 access	1	1	1	1	0	0	1	1	0	X	X
page 7 access	1	1	1	1	1	0	1	1	1	X	X

4.7 ZA15 = ZA14 = 0. These bits select the first 16K of Z80 address space beginning at 0000_H, and result in the PAL generating ULA15 = ULA14 = 0. These are decoded by the ULA (IC1) to produce a signal ROMCS enabling the ROM IC5. A13-A0 on the Z80 address bus provide the instruction address, bank register bit 4 determines whether the upper or lower 16K of ROM is accessed.

4.8 ZA15 = 0, ZA14 = 1. These bits select the RAM page located in the second 16K of the Z80 address space beginning at 4000_H and result in the PAL generating ULA15 = VA15 = 0 and ULA14 = VA14 = 1. The ULA lines signal an access of the contended RAM area and prompt IC1 to assert the DRAS, CAS and DRAMWE lines controlling the read/write operation. At the same time, ULA15 inhibits the CAS output from IC27 preventing any access to the uncontended RAM area.

4.9 The 2:1 data selector IC30 supplies the m.s. row and column address bits to the contended RAM as DMA7, first selecting the row address VA14 = 1 while DRAS is low and the column address bit VA15 = 0 when it returns high. This combination selects the second 16K bank of RAM in the contended area, allowing DMA6 - DMA0 to access locations in page 5 used for the standard screen display.

- 4.10 ZA15 = 1, ZA14 = 0. These bits select the RAM page appearing in the third 16K of the Z80 address space beginning at 8000_H, and result in the PAL generating ULA15 = UA15 = 1 and ULA14 = UA14 = 0. The ULA lines signal an access to the uncontended RAM area and enable IC27 to assert the CAS line which together with RAS (MREQ) and WR control the read/write operation. (Access control lines for the contended RAM area generated by IC1 i.e. CAS, DRAS and DRAMWE, are not asserted at this time). VA15 and VA14 respectively supply the m.s. row and column address bits for the uncontended RAM area as MA7 and select the second 16K bank of RAM allowing MA6-MA0 to access locations in page 2.
- 4.11 ZA15 = ZA14 = 1. These bits select the RAM page appearing in the top 16K of the Z80 address space beginning at C000_H. The bits together with B2-B0 from the bank register IC31 are decoded by the PAL to select any page from the RAM according to the setting of the supplementary address line pairs. For the uncontended RAM space ULA15 is always high allowing IC27 to control read/write operations. UA15,14 assume one of four possible states reflecting the state of B1,B0 and select a page in the range 0-3. For contended RAM accesses ULA15 is always low allowing IC1 to control the read/write operations, and the data selector IC30 to deliver the m.s row and column address bits VA14,15. The latter also assume one of four states and since B2 is set, selects a page in the range 4-7.
- 4.12 Read/Write Operations and Bus Arbitration
- 4.12.1 The following description should be read in conjunction with the circuit diagram given in Figure 1.5
- 4.12.2 Read Only Memory (IC5). The physical ROM is a 32K byte device, but appears in the Z80 address space as two separate 16K ROM's. ROM 1 is the old 48K Spectrum ROM (slightly modified) and is selected when bank register bit 4 sets address A14. ROM 0 is the new Spectrum 128 ROM and is selected when bit 4 is clear. CPU accesses occur during memory read cycles when the Z80 asserts MREQ and loads the address bus A13-A0. MREQ enables the ROM outputs onto the data bus D7-D0, ROMCS decoded from ZA14,15 (see para. 4.7) selects the chip.
- 4.12.3 An external ROM chip select input, supplied via the expansion port on pin 25A, selectively disables the on-board ROM by pulling the select input high. By virtue of R33 placed on the ULA side of the ROM the ULA ROMCS output is effectively inhibited. Interface 1 uses this mechanism, allowing the CPU to read the extension ROM in the interface for microdrive and RS232 applications.

- 4.12.4 Uncontended RAM (IC15-22). The uncontended RAM comprises eight 64K dynamic RAM chips organised as a 64K byte memory with a 256 x 256 row/column matrix. When ULA15 is high (see para. 4.11) separate 8 bit row/column addresses are supplied by IC27 as MA7-MA0. These are derived from the Z80 address bus A13-A0 with UA14 and UA15 from IC29. The low order address bits A6-A0 with UA14 provide the row address and are selected at the beginning of the memory access cycle when initially the $\overline{\text{RAS}}$ ($\overline{\text{MREQ}}$) output from the Z80 is low. Later, as the row address is latched, IC27 asserts $\overline{\text{CAS}}$ selecting the high order address bits A13-A7 with UA15.
- 4.12.5 Row/column address selection and RAS/CAS timing for the RAM is decoded in IC27 in conjunction with IC28 and the associated discrete components. A theoretical timing diagram illustrating the $\overline{\text{RAS}}$ / $\overline{\text{CAS}}$ waveforms is given in Figure 1.2 (A read operation is shown when the WRL line from the Z80 is high).
- 4.12.6 Contended RAM (IC6-13). The organisation of the contended and uncontended RAM described above is identical. However, because ULA15 is low during accesses to the contended area, IC27 only sources a 7-bit row/column address DMA6-DMA7. The m.s address bit is sourced by the 2:1 data selector IC30. At the start of the memory access cycle IC1 asserts $\overline{\text{DRAS}}$ and selects the row address as A13-A7 off the Z80 address bus with VA14 via the selector. Later as the row address is latched IC1 sets $\overline{\text{DRAS}}$ and selects the column address as A6-A0 with VA15.
- 4.12.7 RAS/CAS timing for the contended RAM area is decoded by the ULA IC1 from $\overline{\text{MREQ}}$ and A15. $\overline{\text{DCAS}}$ is asserted a short time after $\overline{\text{DRAS}}$ returns high, and latches the column address. ULA15 prevents IC27 generating an identical signal for the uncontended RAM. The $\overline{\text{DRAMWE}}$ signal, also generated by the ULA, is a decode of the $\overline{\text{RD}}/\overline{\text{WR}}$ waveforms and selects a RAM read or RAM write cycle.
- 4.12.8 It will be apparent from the circuit diagram that the ULA can access the contended RAM by generating a set of addresses independent of those generated by the CPU. The address port for the RAM is therefore dualled by the insertion of small value series resistors on the address lines between IC27 and the RAM. This ensures that where there is likely to be conflict between the ULA and CPU, the ULA address has priority. Priority is assigned on the basis that the ULA must access screen pages 5 and 7 at set intervals in order to build up the video for the TV display. If the ULA is about to access the RAM and it detects either A14 or A15 (i.e the CPU is also about to access the RAM) the ULA inhibits the CPU clock temporarily halting the CPU memory transaction until its own transaction is completed.

- 4.12.9 Resistors R1 to R8, in series with the data bus lines, perform a similar function to the address port resistors described above. They ensure that the ULA does not 'see' CPU write data while the ULA is accessing the contended RAM.
- 4.12.10 Refresh for the contended RAM is accomplished during normal read cycles, i.e. most rows are refreshed each time the ULA accesses screen pages during picture compilation; the remaining rows are refreshed as a result of other read cycles also known to occur at regular intervals within the refresh period.
- 4.12.11 **Bank Register (IC31).** The bank register is at address 7FFD_H in the Z80 address space. The register is positive edge triggered and latches D5-D0 off the data bus on the negative (trailing) edge of the BANK output from the PAL IC29. BANK is decoded (set high) from TORQ and RD/WR active low (I/O read or write cycle) and ZA1 and ZA15 low (address 7FFD_H).
- 4.12.12 On selecting the 48K Spectrum mode, the Z80 writes a '1' into bit 5 of the register, thus preventing any further access. This action preserves the Z80 address space, preventing erroneous calls to address 7FFD_H crashing the SPECTRUM program. The bit can only be cleared by using the RESET pushbutton or by interrupting the power supply input.

5. INPUT/OUTPUT

- 5.1 The input/output functions are controlled by the Z80 in conjunction with the ULA (IC1) and the sound generator circuit IC32. Like its counterpart in the 48K Spectrum, the ULA handles the tape recorder read/write functions, and generates an interrupt during which it scans the main keyboard. It also accesses the contended RAM area while generating the drive waveforms for the TV display and produces a simple tone output while obeying the BEEP instruction.
- 5.2 The sound generator produces high quality music sound by mixing the outputs from up to three programmable tone generators and a noise generator. It also handles the RS232/MIDI interface and reads the keypad status. Each of these functions and the supporting circuits is described below.
- 5.3 **TV Picture Generation and Sound Output**
 - 5.3.1 The video compilation section of the ULA operates in conjunction with the memory mapped picture display area in the contended RAM, together with the colour encoder IC36 and UHF modulator. This combination produces a high resolution 24 line x 32 character, eight colour display suitable for use with RGB colour or black and white monitors or a domestic TV receiver. The sound output from the ULA or the programmable sound generator is FM modulated and added to the composite video signal for playback through the TV loudspeaker. If a monitor is used the sound is available through the MIC socket.

5.3.2 From the 17.73 MHz external clock (X1/IC37) the ULA derives line and field timing for the composite sync signal on pin 23, and a pixel clock for timing accesses to the RAM. The ULA also generates two 8.8 MHz clocks on pins 46, 47 from which the encoder derives the 4.43 MHz reference and quadrature chroma sub-carriers. The fact that the pixel and chroma carriers are derived from the same external clock source means that dot crawl is eliminated. The dot pattern itself is minimised by adjusting the display line length.

5.3.3 The digital RGB and bright-up signals available from the ULA on pins 19-22 are derived by accessing the picture information located in page 5 or 7 of the contended RAM area at the pixel rate (para. 4.12.8). The addresses are necessarily independent of the CPU and appear on the ULA address lines DMA6 to DMA0 and DMA7 as two separate bytes, timed by the $\overline{RAS}/\overline{CAS}$ row/column address select lines. DMA7 is a decode of bit 3 (VB) loaded in the bank register IC31 and sets the m.s row/column address bits as follows:

VB (IC31)	DMA7 (ULA)		RAM PAGE
	ROW	COLUMN	
0	1	0	5
1	1	1	7

5.3.4 The RGB colour, bright-up and composite sync signals (Figure 1.6) are coupled to the RGB output socket via 68 ohm resistors and are suitable for direct input to a wide range of colour monitors. The same signals are also applied to the encoder IC36 to produce a composite video output at pin 6. The video comprises the following components.

- a) Line/frame sync with colour burst, derived from the composite sync input \overline{CS} and a burst oscillator sustained by tank circuit L3. The position of the burst relative to the line sync pulse is determined by a threshold level set-up on the RAMP input of IC36 by R113/C115.
- b) Colour chrominance is derived by modulating the chroma sub-carriers with the colour difference signals decoded from the RGB and bright-up signals. The latter are first combined using a diode matrix D20-D25 to produce six colour inputs for IC36 - two for each colour, designated '0' and '1'. Without bright-up the presence of any digital colour input at logic '1' drives the '1' input only, producing a pixel display with the colour intensity set for normal viewing. With bright-up activated the '0' and '1' inputs are driven, increasing the intensity so as to highlight the pixel display.

- c) Luminance (grey scale) derived by mixing the RGB inputs in a fixed proportion. The signal is used to produce the colour difference signals in (b) and in its own right to drive the black and white monitor. The luminance is brought out at IC36 pin 7 and is applied to the RGB output socket via a complimentary transistor pair TR13,14.

The luminance is returned to IC36 mixed with the FM modulated sound carrier from IC38. The sound modulator operates at 6 MHz in the UK (5.5 MHz in most other European countries) and is tuned by L4. The modulating signal is derived either by the ULA sourced via R112/C123 or the sound generator circuit IC32 via R132/C127.

- 5.3.5 The composite video signal at IC36 pin 6 is finally applied to an encapsulated UHF modulator operating on European standard channel 36. The device is current driven via TR10,11,12 to give improved linearity thus reducing the effect of sound on vision and vice-versa. The effect is further reduced by outputting the sound carrier 20dB down with respect to the picture carrier.

5.4 Keyboard Scanning

- 5.4.1 Every 20ms (i.e. once per maskable interrupt), the CPU systematically scans the keyboard recording which keys (if any) have been depressed. The scanning method is described below with the aid of Figures 1.3 and 1.4. As the figures clearly illustrate the main keyboard consists of an upper and lower membrane. The upper membrane is organised as an 8 x 5 matrix, the intersection of each row and column bridged by a normally open switch contact. The lower membrane is organised in a similar manner except that only 16 of the intersections are populated by switch contacts. The row 'outputs' and column 'inputs' are shown connected in both cases to separate ribbon cables KB1 and KB2, one to the ULA and the other to the high order address lines A15-A8. Pull-up resistors R65 through R69 ensure that when the address bus is in the high Z state, or none of the switch contacts is closed, row outputs KB1-KB4 remain high.
- 5.4.2 When the keyboard scanning routines are entered the CPU performs successive I/O read cycles setting the \overline{IORQ} and \overline{RD} lines to the ULA, low. At the same time, the I/O port addresses placed on the upper half of the address bus are modified with each cycle such that each of the address lines A15 through A8 is set low in turn, the other lines remaining high.
- 5.4.3 The sequence starts with I/O port address FE driving address line A8 low. The keyboard matrix also sees this potential on column 6, applied via D6 and the ribbon cable KB2. Thus, when any of the switches on the intersection with the column is pressed, the corresponding row output supplying the ULA via the second ribbon cable (KB1), is pulled low.

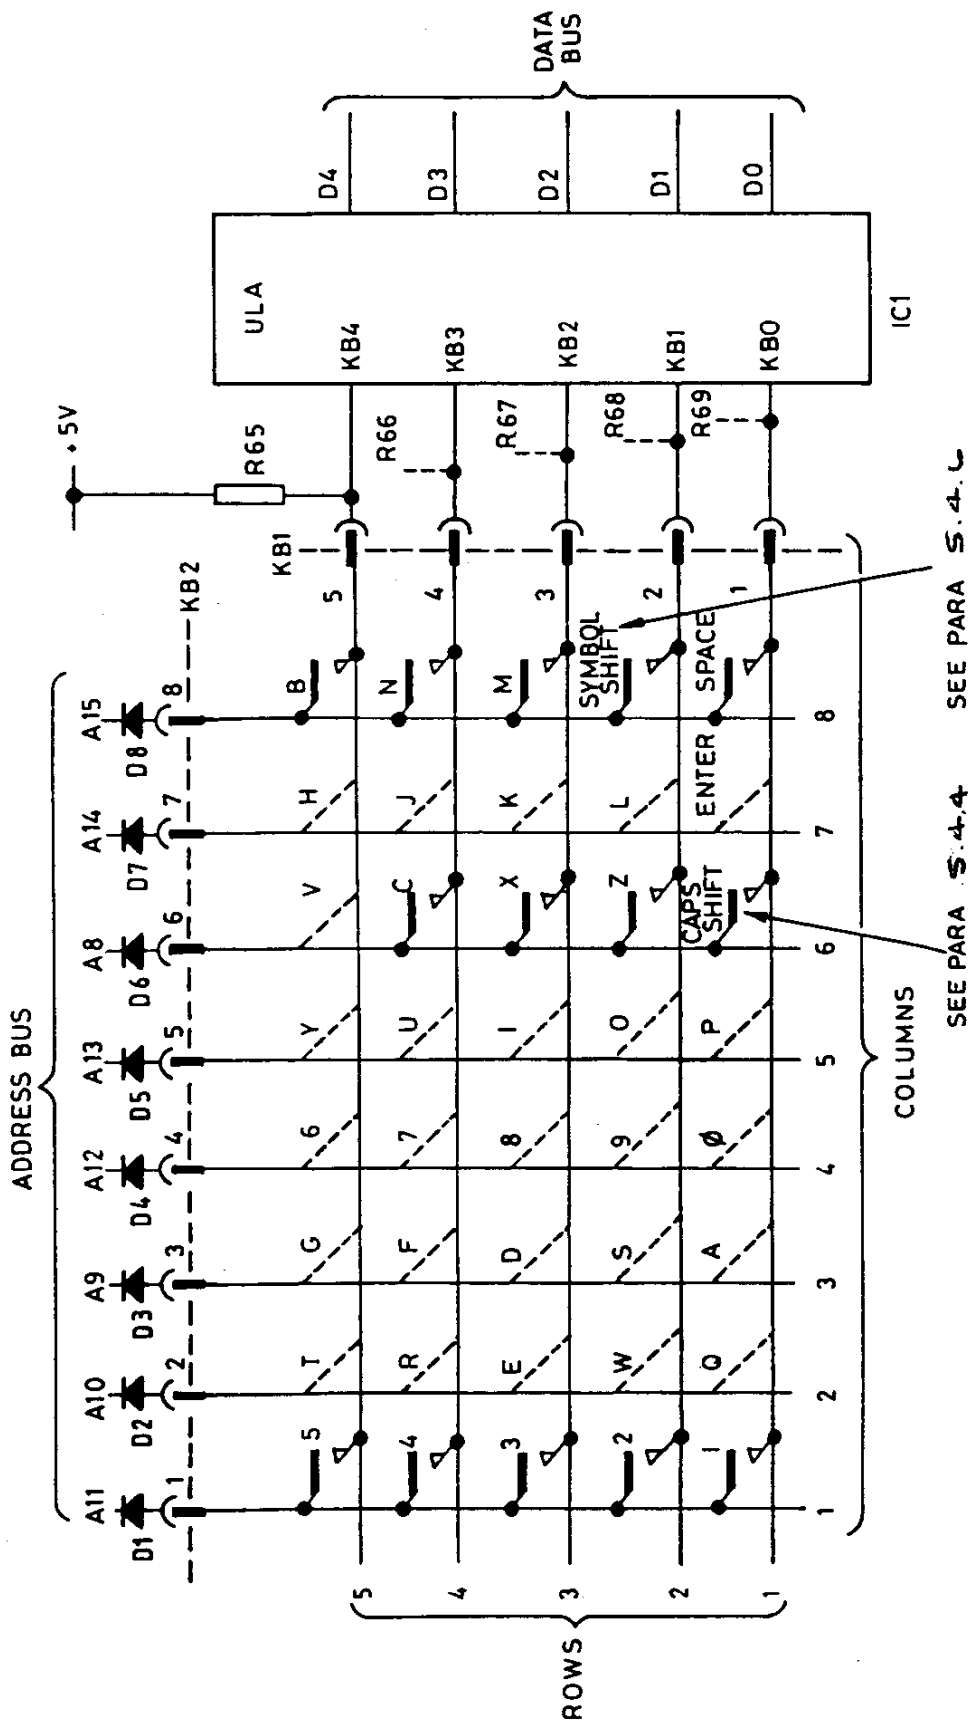


FIG 1.3 KEYBOARD UPPER MEMORIZE

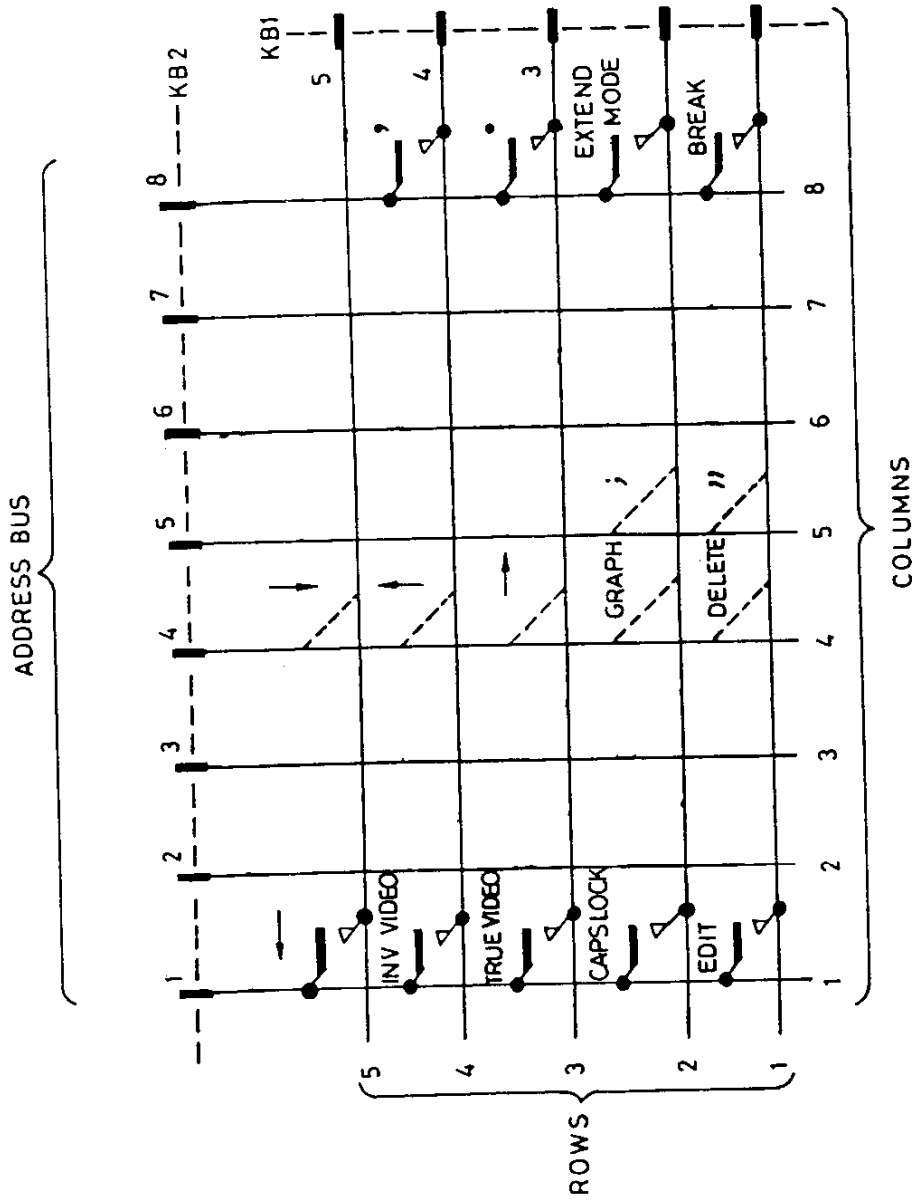


FIG 1.4 KEYBOARD LOWER MEMBRANE

- 5.4.4 The row signal(s) is subsequently buffered by the ULA and placed on one of the five low order data bus lines. For example, if the CAPS SHIFT key is pressed, row one output drives data bus D0 high, and so on. The sequence ends with I/O address 7F when column 8 is addressed. In this instance, operation of the SPACE key drives D0 high. Clearly, the keyboard scanning routines make the distinction between the CAPS SHIFT and SPACE key by knowing which address line is being driven.
- 5.4.5 If one of the following keys is pressed the corresponding switch contact on the lower membrane is closed. Additionally, the CAPS SHIFT switch contact on the upper membrane closes.

TRUE VIDEO	EXTEND MODE	CURSOR →
INV VIDEO	EDIT	CURSOR ←
BREAK	CAPS LOCK	CURSOR ↑
DELETE		CURSOR ↓
GRAPH		

- 5.4.6 For example, pressing TRUE VIDEO closes the switch contact at row 1, column 6 on the upper membrane (CAPS SHIFT) and row 3, column 1 on the lower membrane (TRUE VIDEO).
- 5.4.7 Similarly, pressing any of the following keys results in the corresponding switch contact on the lower membrane closing as well as the SYMBOL SHIFT switch on the upper membrane:

, (comma)
 . (full-stop)
 ; (semi-colon)
 " (quotes)

- 5.4.7 For example, pressing full stop closes the switch contact at row 2, column 8 on the upper membrane (SYMBOL SHIFT) and row 3, column 8 on the lower membrane (full stop).

5.5 Tape Interface

- 5.5.1 When LOADING or SAVEing programs using a cassette recorder, the ULA transfers information between the MIC and EAR sockets and the data bus, performing A/D and D/A conversions as required. During the LOAD operation the CPU executes successive I/O read cycles to I/O port address 254, reading the EAR input off bus line D6. When performing a SAVE operation, the CPU executes successive I/O write cycles to I/O port address 254, this time writing data to the MIC output via bus line D3.

5.5.2 To ensure that I/O cycles are correctly implemented, the $\overline{\text{IORQ}}$ line supplying the ULA is gated with address line A0 via TR6. Thus, if any memory transactions occur when A0 is high (i.e. not port address 254) then the $\overline{\text{IORQ}}$ input is forced high inhibiting any attempt to perform the I/O cycle.

5.5.3 ULA Sound Output. It should be noted that while SAVEing, the level of the MIC output is barely sufficient to modulate the sound carrier to IC38. However, during the execution of a BEEP instruction the CPU writes instead to port 254 on bus line D4. This effectively boosts the MIC output, modulating the sound carrier so that the BEEP tone can be easily heard.

5.6 Programmable Sound Generator

5.6.1 The audio from the sound generator IC32 is derived from a master clock input supplied by the ULA, controlled and shaped in accordance with instruction codes loaded by the Z80 into 14 internal byte wide registers (see below).

REGISTER		BIT							
		B7	B6	B5	B4	B3	B2	B1	B0
R0	Channel A Tone Period	8 BIT Fine Tune A							
R1						4 BIT Coarse Tune A			
R2	Channel B Tone Period	8 BIT Fine Tune B							
R3						4 BIT Coarse Tune B			
R4	Channel C Tone Period	8 BIT Fine Tune C							
R5						4 BIT Coarse Tune C			
R6	Noise Period						5-BIT Period Control		
R7	Enable	$\overline{\text{IN}}$ $\overline{\text{OUT}}^*$		$\overline{\text{Noise}}$			$\overline{\text{Tone}}$		
		IOB	IOA	C	B	A	C	B	A
R10	Channel A Amplitude				M	L3	L2	L1	L0
R11	Channel B Amplitude				M	L3	L2	L1	L0
R12	Channel C Amplitude				M	L3	L2	L1	L0
R13	Envelope Period	8 BIT Fine Tune E							
R14		8 BIT Coarse Tune							
R15	Envelope Shape/Cycle						CONT ATT ALT HOLD		
R16	I/O Port A Data Store	8 BIT PARALLEL I/O on Port A*							
R17	I/O Port B Data Store	8 BIT PARALLEL I/O on Port B							

* RS232/MIDI interface (see below)

5.6.2 The Z80 specifies a register by loading the data bus while writing to address FFFD_H in the I/O space. DA3-DA0 supply the octal address between 0 and 15, DA7-DA4 should be all zero. (In the address mode, DA7-DA4 with IC32 pin 17 strapped high externally, are decoded in IC32 to provide a 'chip select' signal). The instruction code is then written to the register by writing to address BFFD_H .

BC1 and BDIR, decoded in D26,27 from PSG, A14 and RD, define the type of write operation for the sound generator as follows:

PSG	A14	\overline{RD}	BDIR	BC1	I/O ADDRESS	OPERATION
0	X	X	0	0	-	INACTIVE
1	1	1	1	1	FFFD _H	WRITE ADDRESS
1	0	1	1	0	BFFD _H	WRITE DATA
1	1	0	0	1	FFFD _H	READ DATA*


* RS232C/MIDI interface (see below)

5.6.3 PSG is decoded in IC29 from \overline{TORQ} with \overline{RD} or \overline{WR} (I/O read/write cycle) and ZA1 = 0 and ZA 15 = 1 (address FFFD_H with A14 high; address BFFD_H with A14 low).

5.7 RS232C/MIDI INTERFACE

5.7.1 The RS232C/MIDI interface is implemented using the Port A Data Store in the sound generator chip IC32. The data store is a special register at octal address 16 which accesses an 8-bit bi-directional port A7-A0. The port occupies the same I/O space as the sound generator registers and is accessed in much the same way. The addition of a read cycle at I/O address FFFD_H allows the Z80 to input data.

5.7.2 The port direction is determined by a control bit written to register R7 on bus line D6. When D6 is low the port is configured as an input and when high as an output. In this application A3-A0 are only used as outputs and A7-A4 as inputs. A3/A2 supply an RS232C driver IC33 which converts the TTL outputs to RS232C levels (+12V); A2 and A3 drive the CTS and RXD interface lines respectively. A4 - A7 are supplied from an RS232C receiver IC34 which converts the RS232C inputs to TTL levels; A6 and A7 are driven by the DTR and TXD interface lines respectively. The data register contents are summarised as follows:

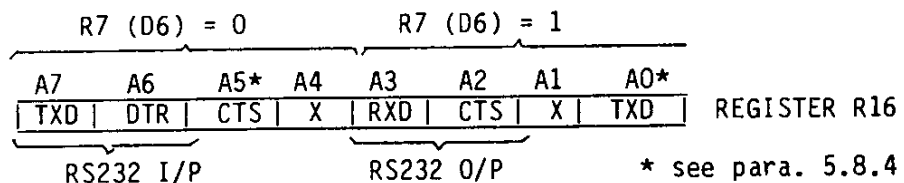

5.7.3 It is evident from the signal directions that the Spectrum 128 adopts the role of a data communications equipment (DCE). However, DTR and CTS do not perform a handshake but are the same signal transmitted in opposite directions. The transmission format is asynchronous, full duplex with 11-bit data frames comprising 1 start bit, eight data bits and two stop bits. Two stop bits are always sent, but the interface can receive satisfactorily with one


5.8 Keypad Scanning

5.8.1 The keypad (Figure 1.7) comprises a 5 x 4 switch matrix and a peripheral interface controller (PIC) with on-chip program and scratchpad memories. The PIC operates from a +5V rail derived by a simple stabiliser from the +12V Spectrum supply, and is clocked from an external LC network. The nominal clock frequency is 2.556 MHz but may vary between 1.278 MHz and 3.835 MHz dependent on component tolerances. The master clear input ($\overline{\text{MCLR}}$) is active for a period after power-up or if the +12V supply is temporarily disconnected.

5.8.2 A two part protocol first synchronises the PIC with the Z80 after power up (or if the flex cable connection is temporarily broken) and then supports the transfer of keystroke data. Assuming synchronisation has been achieved (see below) the keypad scans the keypad once every other interrupt on demand from the Z80.

5.8.3 The keypad scanning routine is much the same as the routine adopted by the Z80 and ULA when scanning the main keyboard. The PIC addresses each column in turn and scans the rows to determine whether a key is pressed. The results of the scan are logged and passed to the Z80 on a demand/response basis (see para. 5.8.9). Each demand prompts the PIC to scan a row and report any change in the status since the previous scan. If there is no change, the PIC responds negatively, sending a space in response to the START signal from the Z80. In this case the PIC and Z80 determine that the next START signal is a call for the result of the row scan at the next column address. If the scan indicates that there has been a change in status since the previous scan, the PIC responds positively by sending a mark in response to the START signal. The Z80 responds by sending a further four START signals, prompting the PIC to transmit a 4-bit serial code with a '1' set in the bit position corresponding with the particular row. Since the Z80 keeps a log of the column address by counting the number of START signals it sends and registering the PIC responses since the start of the interrupt, it can readily identify the key code from a look-up table.


- 5.8.4 On a physical level, data exchanges between the PIC and the Z80 are conducted at RS232 signal levels over a single line pair - a transmit line (TXD/RXS) from the Z80 to the PIC and a receive line (CTS/TXS) from the PIC to the Z80. The transmit signal, originated by the Z80, is output as bit A0 from the Port A Data Store in the sound generator IC32 during a write to I/O address BFFD_H. From IC32 the data is converted from logic to RS232 levels in IC33 and routed from there to the PIC. A 4.3V zener diode on the keypad receive line, limits the positive signal excursion (space) to +4.3V and the negative signal excursion (mark) to 0V.
- 5.8.5 The transmit signal, originated by the PIC, follows a reciprocal path and is input to the Z80 from the sound generator as bit A5 in the Port A Data Store during a read from I/O address FFFD_H (NOTE: The RS232C receiver IC34 recognises a mark as 0V and a space as any level exceeding +3V).
- 5.8.6 Accesses to the Port A Data Store are identical to those described under the heading 'RS232/MIDI Interface'.
- 5.8.7 Reset Protocol. The synchronising sequence which runs after power up or reconnection (as seen at the RS232 connector) is shown below:

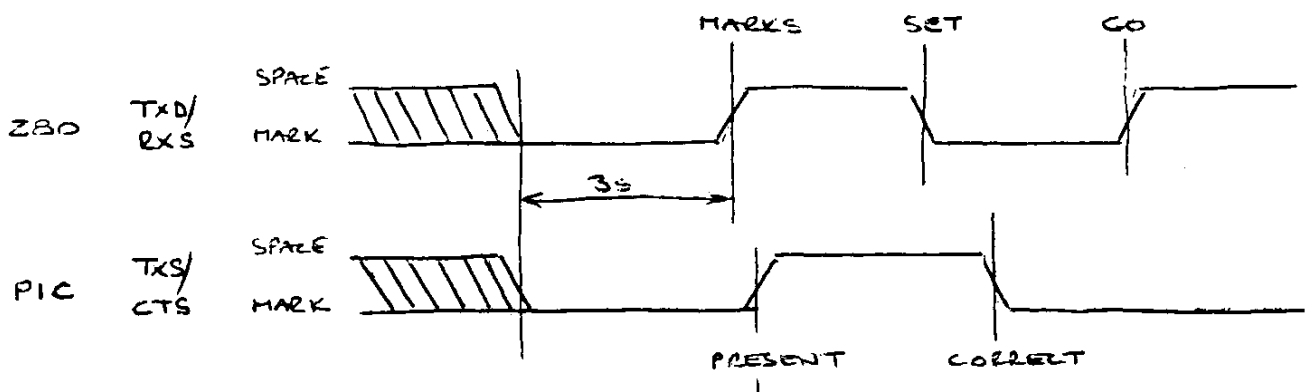

- 5.8.8 The significant time delays are as follows:
- The initial 3 second delay which ensures that the PIC is up and running. During this time the keypad is inoperative.
 - The 1ms delay between the Z80 setting TXD high (MARKS) and the PIC responding by setting TXS high (PRESENT). If the delay is exceeded, the Z80 assumes that some other device is connected, and abandons the reset sequence.

- c) The 0.6ms delay between the PIC returning to the idle state (CORRECT) and the Z80 setting TXD high (GO). If the delay is exceeded the keypad assumes that the Z80 has been reset and resets itself (i.e. returns to the start of the sequence).
- d) The 1 ms delay between the Z80 setting TXD high (SET) and the PIC responding by putting TXS low (CORRECT). If the delay is exceeded, the Z80 assumes that some other device is connected, and abandons the reset sequence.

5.8.9 Bit Transfer Protocol. The protocol for transferring a single bit from the PIC to the Z80 (as seen at the RS232 connector) is shown below:

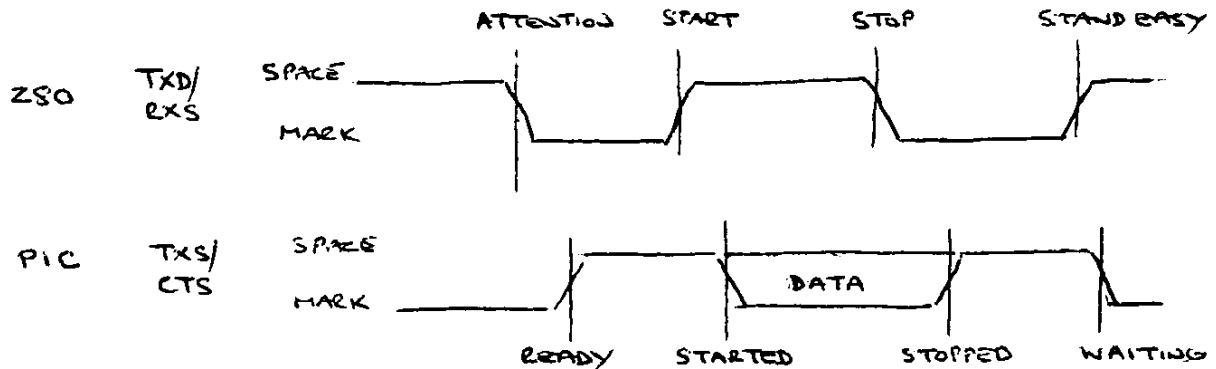

5.8.10 The significant levels and time delays are as follows:


- a) At the start of the transfer the Z80 polls TXS which should be idling low. If not the Z80 assumes that some other device is connected and abandons the transfer.
- b) Having detected that TXS is low the Z80 sets TXD low (ATTENTION) and waits for the PIC to respond with READY. If READY is not received within 15 ms, the Z80 assumes that the keypad has been disconnected and abandons the transfer.
- c) After setting READY high the PIC polls RXS waiting for START. If not received within 0.2 ms the PIC assumes that the Z80 has been reset, and resets itself.
- d) On receiving START the PIC leaves TXS high if it wants to send a zero data bit, or puts it low to send a '1' (STARTED).
- e) Having received the data bit the Z80 sets TXD low (STOP); the PIC responds with TXS high, if not already so (STOPPED).

- f) Having responded with STOP, the PIC waits for the Z80 to set TXD high (STAND EASY); the PIC responds by setting TXS low ready to transfer the next data bit. If the Z80 does not respond with STAND EASY within 1.3 ms the PIC assumes that the Z80 has been reset, and resets itself.

6. POWER SUPPLIES

- 6.1 The on-board power supply unit receives a 9V unregulated supply from the external Sinclair ZX power pack and derives the following internal supply rails:
 - a) regulated +5V for the IC logic circuits, the ULA and the sound/UHF modulators
 - b) -5V for the expansion port
 - c) +12V for the RS232 driver IC33 and the keypad
 - d) -12V for the RS232 driver IC33 (unregulated -5V to -12V).
- 6.2 The external power pack incorporates a mains transformer, full wave rectifier and capacitive smoothing. A thermal fuse is fitted at the transformer input.
- 6.3 The on-board power supply unit (Figure 1.5) incorporates a 7805 regulator, deriving the +5V power rail, and an input supply for the inverter stage TR4/TR5. The latter raises the level of the +9V unregulated supply above +1 V. The resultant square wave at the junction of TR4 collector and the inverter coil is subsequently rectified and smoothed by D15/C44 producing the +12V output. The square wave at TR4 collector also supplies a charge pump C111/112 and D28,29 which derives the -12V rail. The -5V supply is taken from this rail via a zener D19.
- 6.4 The following supplies are available on the expansion connector:
 - a) +5V (pin 3A)
 - b) pulsed +12V (pin 23B)
 - c) +12V (pin 23A)
 - d) -5V (pin 20B)
 - e) +9V unregulated (pin 4A)
 - f) ground (pins 6A, 7A, 14A)

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

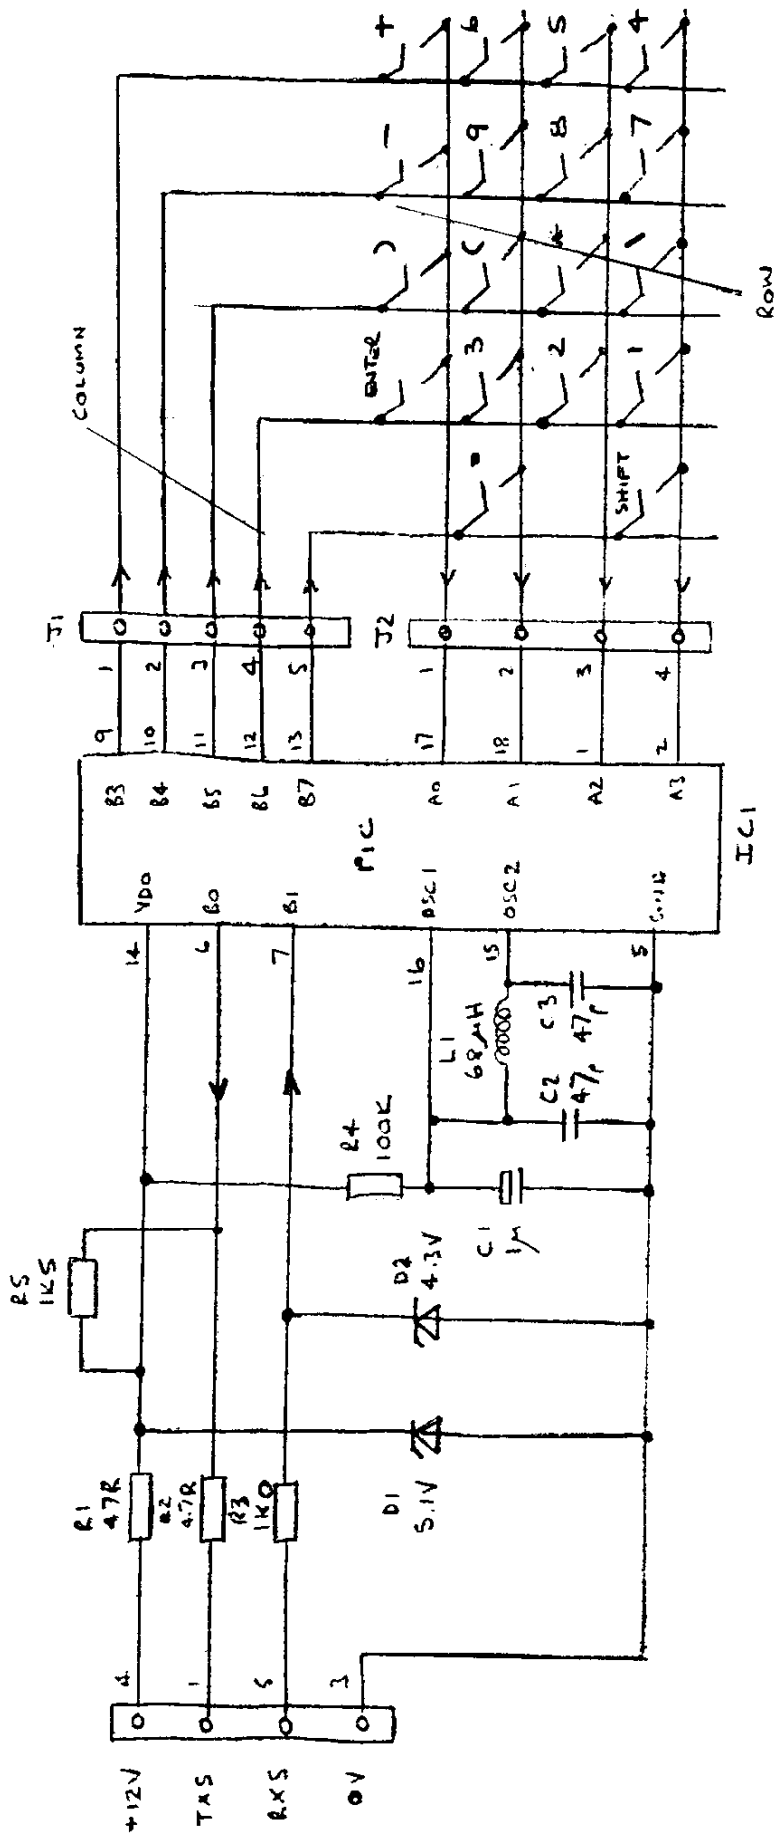

FOR SERVICE MANUALS
 CONTACT:
MAURITRON TECHNICAL SERVICES
 www.mauritron.co.uk
 TEL: 01844 - 351694
 FAX: 01844 - 352554

FIG 1.7 KEYPAD CIRCUIT

SECTION 2

DISASSEMBLY/ASSEMBLY

Sub-Section	LIST OF CONTENTS	Page No
1	Disassembly	2.1
2	Assembly	2.1

1. DISASSEMBLY

1.1 Unplug all input/output connectors and turn the computer upside down to reveal eight fixing screws. Release the screws (noting the position of two countersunk screws for re-assembly), turn the computer right side up and separate the case halves. To disassociate the case halves, carefully disconnect the keyboard ribbon cables from the pcb.

1.2 To remove the pcb from the lower case half remove the board fixing screws and the fixings securing the voltage regulator to the finned heatsink.

CAUTION If the pcb is to be powered-up when separated from the case, the pcb, with heatsink attached, should be removed as a complete assembly. The heatsink is secured to the case by two screws. Take care not to damage the electrical connections to the regulator.

1.3 To change the keyboard membrane, bubble mat or any of the keys, remove the membrane tail clamps followed by ten screws securing the keyboard reaction plate. Lift the plate clear followed by the membrane and bubble mat below. Individual keys can be removed for cleaning by pressing the key and gently prising the retaining sleeve off the underside of the key using a small screwdriver inserted under the rim.

2. ASSEMBLY

2.1 Assembly is generally carried out using the reverse procedure to that of disassembly. Do not overtighten the self-tapping fixing screws.

- 2.2 When replacing the keyboard components support the upper case half face down so that the keys are clear of the work surface. Position the bubble mat, membrane and reaction plate so that the hole at either end engages with the locating peg. Secure the fixing screws starting with the centre row. Tighten fully and back-off a 1/4 turn.
- 2.3 When clamping the membrane tails ensure that there is good electrical contact between the middle, upper and lower tracks. This is achieved by correctly positioning the packing pieces (extensions of the bubble mat) and ensuring that the ends of the middle tracks protrude 1mm beyond the clamps. On new membranes, to prevent the possibility of short circuits, bond the upper and lower tracks together, close to the edge connector end, using double sided tape.
- 2.4 When replacing the pcb, ensure that the reset pushbutton is correctly located in the cut-out provided in the end of the case.
- 2.5 Before final assembly reconnect the keyboard ribbon cables (they should lie in an 'S' shape) and ensure that the legs and leg springs are in position.

SECTION 3

SETTING UP AND SYSTEM TEST

Sub-Section	LIST OF CONTENTS	Page No
1	Setting Up Instructions Sound Carrier Frequency	
2	System Test	

1. SETTING UP INSTRUCTIONS

TBD

2. SYSTEM TEST

TBD

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

3.1

SR1AAA

SECTION 4

FAULT FINDING AND REPAIR

Sub-Section	LIST OF CONTENTS	Page No
1	Introduction	4.1
	Test Equipment	4.1
2	Fault Diagnosis	4.2
	Techniques	4.2
	Power Supply Unit	4.3
	Initialisation	4.3
	Symptomatic Faults	4.5
3	Repair	4.6
Fig	ILLUSTRATIONS	
4.1	Test Oscillograms	4.7/8

1. INTRODUCTION

1.1 Test Equipment

Section 4 is intended as a guide to fault diagnosis and repair of the SPECTRUM 128. It is assumed that users have a reasonable knowledge of electronic servicing, theory and standard fault-finding techniques and have access to the test equipment and tools required to carry out the task. The table below contains a list of the minimum recommended test equipment and materials.

EQUIPMENT	SPECIFICATION/MANUFACTURER
Storage Oscilloscope with x10 probe	Rise Time: 0.02 us/cm
Variable power supply unit	0 to 30V d.c
Mono cassette recorder	With RECORD and PLAYBACK facilities
Mains extension lead	'Safebloc' type
Multimeter	General pupose
Colour Television and Monitor	Open Market
ZX Printer	Sinclair
Test tape	
Blank tape	Open Market
Double-sided adhesive tape?	12mm and 6mm wide, Tesafix 959 (B.D.F TESA) or 3M equivalent)

Engineers who are already familiar with the Sinclair SPECTRUM+ will find some similarities in the SPECTRUM 128. The SPECTRUM 128, however, is a more sophisticated device with improved colour and sound circuitry.

2. FAULT DIAGNOSIS

2.1 Techniques

In a closed loop system such as a computer, because of the interdependence of numerous component parts, fault diagnosis is not necessarily straight-forward. In addition, because of the high speed cyclic operation, interpretation of any waveforms on control, data and address lines as being valid depends to a large extent on practical experience of the system. There are however, certain checks with valid waveforms and levels that can be carried out before substituting any integrated circuits. Experience has shown that the best method of intially checking waveforms and levels can be to compare with the same point in a known serviceable board. The following pages provide a basic fault-finding procedure and furnish a list of possible faults along with suggested ways of curing them.

With a densely populated board such as the SPECTRUM 128, a careful physical examination of the board can sometimes indicate an obvious fault. Burnt-out discrete components or an overheated track show up immediately, as do the attentions of an enthusiastic amateur. Bearing in mind the latter, short circuits caused by hairline solder 'splatter' can be of several ohms resistance and can cause some very misleading fault symptoms.

Provided first principles are adhered to and a common-sense approach is adopted, it will be found after a short space of time that fixing a faulty Spectrum is very much a routine operation.

2.2 Power Supply Unit

The unstabilised external power supply unit is a source of some problems. The design is such that, at minimum input voltage (215V a.c.) and 1.4A output, the voltage trough should not be less than 7.0V; at maximum input voltage (265V a.c.) and 600mA output, the voltage peak should be less than 13V.

2.3 Initialisation

At switch-on the computer should automatically 'initialise' and produce a clear screen with the statement.

© 1985 Sinclair Research Ltd

displayed in the lower left section of the screen. This indicates that most of the system is working. If the SPECTRUM 128 does not initialise, carry out the following basic checks.

Basic Checks. It is difficult to be specific in a fault-finding guide because of the large variety of fault conditions which can occur, but the following procedure, starting with a table of checks set out in order of priority, will however isolate the major fault area. The oscillograms reproduced on pages 4.6 and 4.7 are measured at points referenced on the circuit diagrams.

FUNCTION	CIRCUIT REF	VOLTAGE/WAVEFORM
Voltage regulator input	+ve side of C50	+9V d.c + 2.0V. At less than +7V the regulator may not operate correctly
Voltage regulator output	+ve side of C34 and IC15 pin 8	+5V d.c + 0.25V; no discernable ripple

(continued)

FUNCTION	CIRCUIT REF	VOLTAGE/WAVEFORM
On-board power supply outputs:	IC33 pin 14 IC34 pin 1 D19 anode	+12V d.c \pm 0.5V -12V d.c \pm 3V, -7V -5V d.c Check the oscillograms at points (A) and (B)
Clock pulses:		
Crystal	IC37 pin 6	17.73447 MHz with no jitter; check the oscillogram at point (C)
Z80	IC2 pin 6	3.54689 MHz with no jitter; check the oscillogram at point (D)
Colour encoder	IC1 pins 46,47	8.8 MHz with no jitter

- 2.4 If the basic tests prove satisfactory check the +5V and ground distribution to the ROM, Z80, ULA and the RAM. Also check the following:
- The \overline{RD} , \overline{WR} , \overline{MREQ} , D0-D7 and A0-A15 lines from the Z80. They should all be active immediately following a reset.
 - The $\overline{RAS}/\overline{CAS}$ lines to the uncontended RAM area IC15-IC22. The lines should be active immediately following a rest.
 - The $\overline{RAS}/\overline{CAS}$ lines to the contended RAM area IC6 to IC13. Compare with the oscillograms at points (E) and (F). (The RESET pushbutton should be operated to obtain a clear trace).
 - The ROM IC5 is enabled by an active low signal at pin 20.
 - The bank register IC312 is loaded with the correct values. Immediately after reset, pins 2,5,7,10,12 and 15 should be low.
 - Check the outputs on the RGB connector.
 - Check the picture on a domestic television and listen for keyclicks each time the ENTER key is pressed. Also check the following:

- i) LUMO output on IC36 pin 7; compare with the oscillogram at point (G) on the circuit.
- ii) Sound carrier on IC38 pin 4; compare with the oscillogram at point H on the circuit. The frequency should be within 2 KHz of 6.0 MHz for U.K operation or 5.5 MHz for European operation. Adjust as per the Setting Up Instructions if the tolerance is exceeded.
- iii) Drive into the modulator; compare with the oscillogram at point (J) on the circuit. Note the d.c. level at the bottom of the waveform (typically 185 mV).

2.5 Symptomatic Faults


As with any complex digital equipment the possible permutations are vast, thus the following table is not intended to be an exhaustive list of the faults that might occur on the Spectrum. It is intended as a guide only to possible courses of action to follow when faults show up in particular areas of the circuit. These areas are listed in the table with sub-headings, in no particular order of priority. It is envisaged that the ZXTP test tape has been loaded, or an attempt has been made to load the tape, in order to check for a faulty condition.

AREA	SYMPTON	ACTION
TBD	TBD	TBD

Authors Note: Table details to follow when production and in-service history is known.


3. REPAIR

- 3.1 Renewal of components should be carried out using recognised desoldering/heatsinking techniques to prevent damage to the component or to the printed circuit board. Other points to be noted are:
- (a) When replacing a keyboard matrix, take care that the ribbon connectors are fully inserted into the board connectors, and are not kinked during insertion.
 - (b) Make sure there is a good contact made between the voltage regulator body and the associated heatsink in order to ensure adequate heat conduction.
 - (c) When the regulator is being replaced it is recommended that a suitable proprietary thermal grease is applied to the rear surface of the component body.
 - (d) The modulator should be replaced as a complete unit.
 - (e) When replacing plug-in ICs it is advisable to use the correct removal and insertion tools. Avoid contaminating the connection pins by handling.
 - (f) When handling ICs take normal anti-static precautions. It is recommended that only a suitably earthed, low power soldering iron be used.
 - (g) After any component has been renewed the circuit board should be examined carefully, to ensure that there are no solder 'splatters' which may cause short circuits between tracks and connector pins.

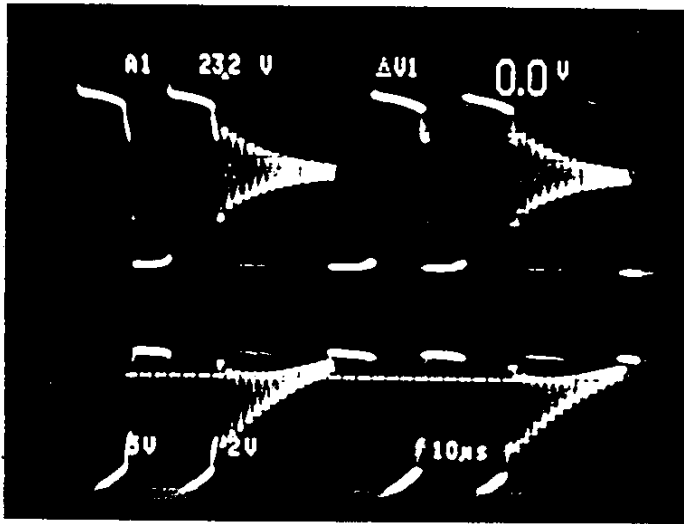


A (TR4 Collector)

B (TR4 Base)

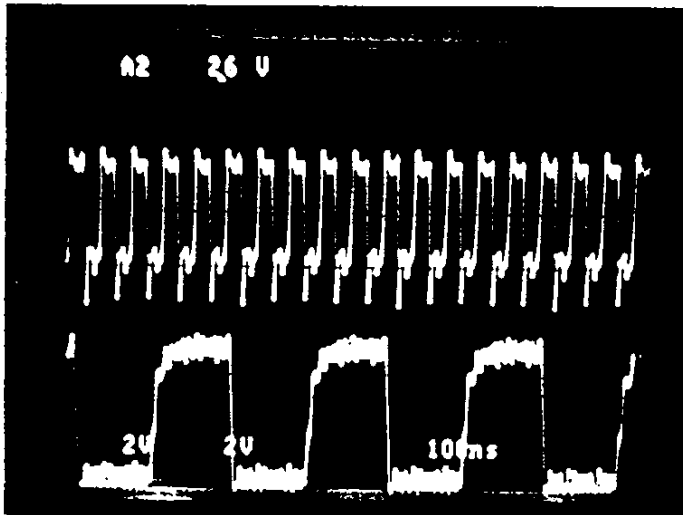

C (IC37 Pin 6)


D (TR3 Collector)

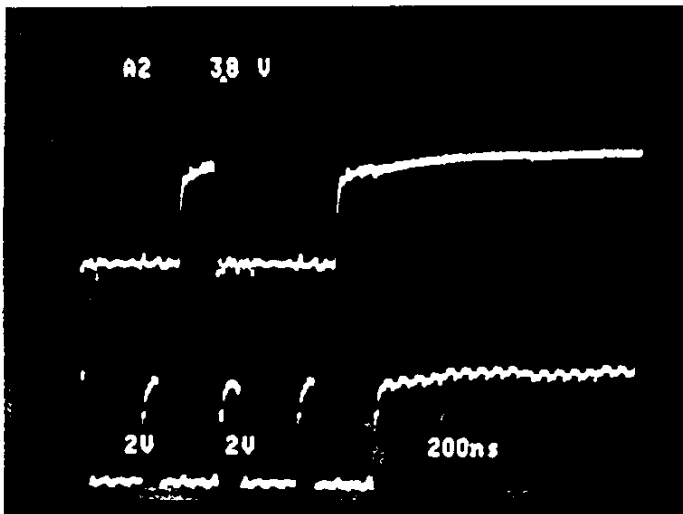

E (IC1 Pin 42)

F (IC1 Pin 2)


FIG 4.1(A) TEST OSCILLOGRAMS (REF. FIGS 1.5 & 1.6)

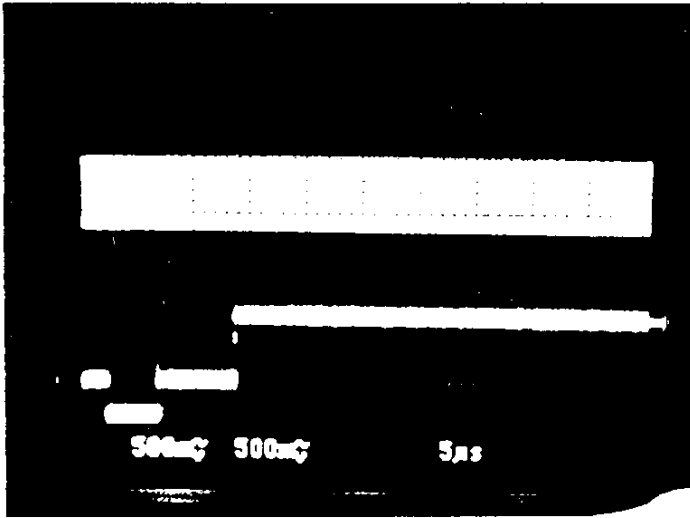

G (IC36 Pin 7)

H (IC38 Pin 4)

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

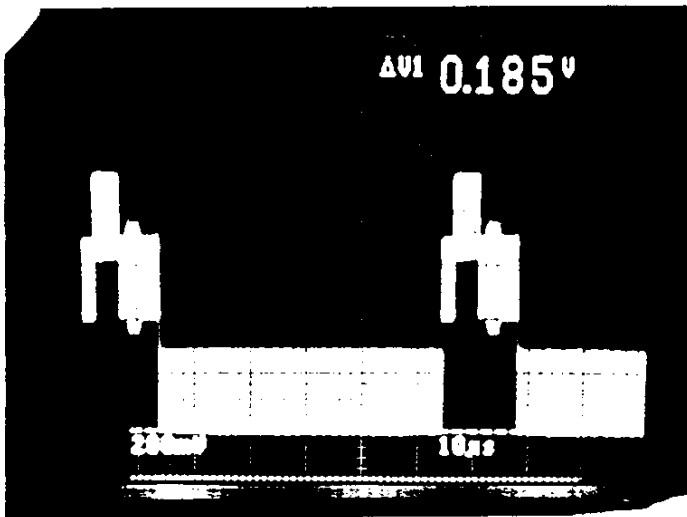

J (TR11 Emitter)

FIG 4.1(b) TEST OSCILLOGRAMS (REF. FIG. 1.6)

TABLE 5.2 MAIN PCB COMPONENTS

Circuit Reference	Value	Rating/Tolerance	Manufacturer/Type	Notes
CAPACITORS				
(Unless otherwise stated all capacitors are axial types)				
C1-C8	22nF	25V,10%	Ceramic	
C9-C24	Not used			
C25	100uF	10V,-10%+80%	Electrolytic	
C26	22nF	25V,10%	Ceramic	
C27	1uF	50V,10%	Electrolytic	
C28	22uF	10V,-10%+80%	Electrolytic	
C29,31	22nF	25V,10%	Ceramic	
C31	100nF	25V,10%	Ceramic	
C32	100nF	25V,10%	Ceramic	
C33	Not used			
C34	22uF	10V,-10%+80%	Electrolytic	
C35	10nF	25V,10%	Ceramic	
C36-C40	Not used			
C41	22nF	25V,10%	Ceramic	
C42	Not used			
C43	100nF	25V,10%	Ceramic	
C44,45	100uF	10V,-10%+80%	Electrolytic	
C46-C48	Not used			
C49	560pF	25V,10%	Ceramic	
C50	22uF	10V,-10%+80%	Electrolytic	
C51-C54	Not used			
C55-C62	22nF	25V,10%	Ceramic	
C63-C65	Not used			
C66	22nF	25V,10%	Ceramic	
C67	100pF	25V,10%	Ceramic	
C68-C73	Not used			
C74	4.7uF	5V MIN	Electrolytic	
C75	100nF	25V,10%	Ceramic	
C76-C79	Not used			
C80	22uF	10V,-10%+80%	Electrolytic	
C81-C99	Not used			
C100	10nF	25V,10%	Ceramic	
C101	22nF	25V,10%	Ceramic	
C102,103	Not used			
C104	100nF	25V,10%	Ceramic	
C105	180pF	25V,10%	Ceramic	
C106-C110	22nF	25V,10%	Ceramic	
C111,112	47uF	16V,-10%+80%	Electrolytic	
C113,114	47nF	25V,10%	Ceramic	
C115	330pF	25V,2%	Ceramic	

Circuit Reference	Value	Rating/ Tolerance	Manufacturer/ Type	Notes
CAPACITORS (continued)				
C116	10nF	25V,10%	Ceramic	
C117	Not used			
C118,119	1nF	25V,10%	Ceramic	
C120	100pF	25V,10%	Ceramic	
C121	47pF	25V,10%	Ceramic	
C122	1nF	25V,10%	Ceramic	
C123	1uF	10V,-10%+80%	Electrolytic	
C124	20pF	25V,2%	Ceramic	(3)
C125	100nF	25V,10%	Ceramic	
C126	22pF	25V,10%	Ceramic	
C127	1uF	10V,-10%+80%	Electrolytic	
C128	47nF	25V,10%	Ceramic	
C129	100pF	25V,10%	Ceramic	
C130	(Note 6)	25V,2%	Ceramic	(6)

COILS

Circuit Reference	Value	Rating/ Tolerance	Manufacturer/ Type	Notes
COIL	SPECTRUM		N Devon	
L1/2	TFR		N Devon,Toroidal/ 2-winding	(7)
L3			Toko, 7KL (PF291ACS-1885Z)	
L4			Toko, 7KL (?)	(8)
L5	Not used			
L6,7	100uH		Taiyo, LAL04-0-101K	

CONNECTORS

Reference	Description	Manufacturer/Part No
EAR,MIC	3.5mm jack socket	TUDA
PWR	2.1mm co-axial socket	Hoseiden
KB1	5-way ribbon connector	BURNDY TE - 5 - 5S1V3
KB2	8-way ribbon connector	BURNDY TE - 8 - 5S1V3
RGB	8-way DIN socket <u>or</u>	
	9-way D-Type connector	
KEYPAD, RS232	6-way telephone jack socket	BICC, BT Type, 603A

CRYSTALS

Circuit Reference	Frequency	Manufacturer/ Type	Notes
X1	17.734475 MHz		(5)

DIODES

Circuit Reference	Device	Manufacturer/ Type	Notes
D1-D8	IN4148	Signal	
D9-D12	Not used		
D13	IN4148	Signal	
D14	Not used		
D15	BA157	Rectifier	
D16	Not used		
D17	BA157	Rectifier	
D18	Not used		
D19	BZY88C5V1	Zener	
D20-D27	IN4148	Signal	
D28,29	BA157	Rectifier	
D30-D34	IN4148	Signal	

INTEGRATED CIRCUITS

Circuit Reference	Device	Manufacturer/ Type	Notes
IC1(ULA)	7C001	Ferranti	
IC2(CPU)	Z80A/u780	Zilog/NEC	
IC3,4	Not used		
IC5 (ROM)	SPECTRUM 128	VTI	(4)
IC6-IC13	4164	150ns	(1)
IC14	Not used		
IC15-IC22	4164	150ns	(1)
IC23-IC26	Not used		
IC27	ZX8401	Mullard	
IC28	74LS04	Texas	
IC29	HAL10H8CN	MMI, National	
IC30	74LS157	Not National	
IC31	74LS174	-	
IC32	AY-3-8912A	General Instrument	
IC33	1488	-	
IC34	1489	-	
IC35	Not used		
IC36	TEA2000	Phillips	
IC37	74S04	-	
IC38	MC1376	Motorola	

RESISTORS (1/4W, 5% unless otherwise stated)

Circuit Reference	Value	Rating/ Tolerance	Manufacturer/ Type	Notes
R1-R8	470R			(2)
R9-R16	8K2			
R17-R23	470R			
R24	1K0			
R25	180R			
R26,27	470R			
R28-R30	10K0			
R31	220K			
R32	Not used			
R33	680R			
R34	15R	0.5W or 1W		
R35	10K0			
R36	680R			
R37	1K0			
R38-R57	Not used			
R58	1K0	2%		
R59	1K8	2%		
R60	220R			
R61	15R			
R62-R64	Not used			
R65-R67	10K0			
R68	6K8			
R69	10K0			
R70-R72	Not used			
R73	1K0			
R74-R78	Not used			
R79	2K2			
R80-R86	Not used			
R87	0R			
R88	1K0			
R89	8K2			
R90	1K5			
R91-R95	68R			
R96-R98	10K0			
R99	470R			
R100	1K5			
R101,102	820R			
R103	3K3			
R104	470R			
R105	1K0			
R106	820R			
R107	3K9			
R108	6K8			
R109	4K7			
R110	15K0			
R111	39K0			

RESISTORS (Continued)

Circuit Reference	Value	Rating/ Tolerance	Manufacturer/ Type	Notes
R112	68K0	2%		
R113	36K0			
R114	1K0			
R115	10K0			
R116	Not used			
R117-R120	1K0			
R121	Not used			
R122	1K0			
R123	180R			
R124, 125	470R			
R126	330R			
R127	1K5			
R128	8K2			
R129	1K0			
R130, 131	1K5			
R132	39K0			
R133	56R			
R134	75R			
R135	8K2			
R136	Not used			
R137	47R			
R138	470R			


TRANSISTORS

Circuit Reference	Device	Alternative	Notes
TR1,2	Not used	KSC839	(2)
TR3	ZTX313		
TR4	ZTX650		
TR5	ZTX213		
TR6	ZTX313	8C213P/8C558B 8C184P/8C549B	
TR7	Not used		
TR8,9	Not used		
TR10	8C308B		
TR11-TR13	8C239B		
TR14	ZTX313		

TABLE 5.3 KEYPAD PCB COMPONENTS


Circuit Reference	Value/ Descrip	Rating/ Tolerance	Manufacturer/ Type	Notes
CAPACITORS (axial types)				
C1	1uF	10V, -10%+80%	Electrolytic	
C2,3	47pF	25V, 10%	Ceramic	
COILS				
L1	68uH	+10%	Toko, 348LS - 680K	
CONNECTORS				
J1,2	5-way ribbon connector		BURNDY TE - 5 - 5S1V3	
J3	5-way connector		Molex, 4494-05-04	
DIODES				
D1	BZY88C	5V1	Zener	
D2	BZY88C	4V3	Zener	
INTEGRATED CIRCUITS				
IC1	PIC1652		General Instrument	
RESISTORS (1/4W, 5%)				
R1,2	47R			
R3	1K0			
R4	100K			
R5	1K0			

NO	DESCRIPTION	PART NO.
1	I.C. Z80A/U780	X-1151
2	I.C. MULTIPLEXER 16 PIN	X-1152
3	I.C. PCF 1306P (ZX8401)	X-1153
4	I.C. 74LS04	X-1016
5	I.C. ROM-28 PIN 256K MASKX-1154	
6	I.C. ULA 7C001	X-1155
7	I.C. RAM 4164	X-1054
8	I.C. HAL10H8CN	X-1156
9	I.C. 74LS174	X-1157
10	I.C. AY-3-8912A	X-1158
11	I.C. 1488/MC1488P/SN 75188N	X-1067
12	I.C. 1489/MC1489P/SN 75189N	X-1068
13	I.C. TEA2000	X-1159
14	I.C. MC1376	X-1160
15	I.C. 74S04	X-1161
16	T.R. ZTX 313	X-1017
17	T.R. BC184P/BC239B/BC49B	X-1162
18	T.R. BC213/BC3088/BC5588	X-1163
19	T.R. ZTX 650	X-1164
20	DI. BA157	X-1023
21	DI. ZENER 500MW	X-1165
22	DI. IN4148	X-1022
23	COIL 5 PIN NEOSYD FORMER	X-1166
24	CHOKE BIFILAR WOUND	X-1167
25	COIL 7KL(60mh)	X-1168
26	COIL 100 uH	X-1169
27	CRYSTAL 17.73447MHZ	X-1170
28	SOCKET ROM 28 PIN	X-1171
29	SOCKET EAR/MIC 3.5MM	X-1031
30	SOCKET POWER 3 LEG	X-1172
31	SOCKET U.L.A. 48 PIN	X-1173
32	SOCKET 8 WAY PIN	X-1174
33	SOCKET 6 WAY PIN	X-1175
34	CONNECTOR 8 WAY	X-1176
35	CONNECTOR 5 WAY	X-1177
MISCELLANEOUS		
36	MODULATOR U.K. TYPE	X-1178
37	LOWER CASE MOULDING	X-1179
38	KEYBOARD AND TOP CASE SUB ASSY	X-1180
39	RESET SWITCH SUB-ASSY	X-1181
40	FOOT RUBBER	X-1182
41	REACTION PLATE PLASTIC	X-1183
ACCESSORIES		
42	POWER SUPPLY 9V 1.85AMP UK 1850	X-1220
43	DATA TRANSFER CABLE 3.5MM3.5MM INTO-TWO	X-1203
44	128 SUPER TEST CASSETTE	X-1221
45	128 NEVER ENDING STORY CASSETTE	X-1222
46	R.F. CORD	X-1100
47	SERVICE MANUAL	X-1223
48	INTRODUCTION BOOK	X-1224
49	CARTON PLAIN + SA LABEL	X-1225
50	POLY PACK SET	X-1226/PP

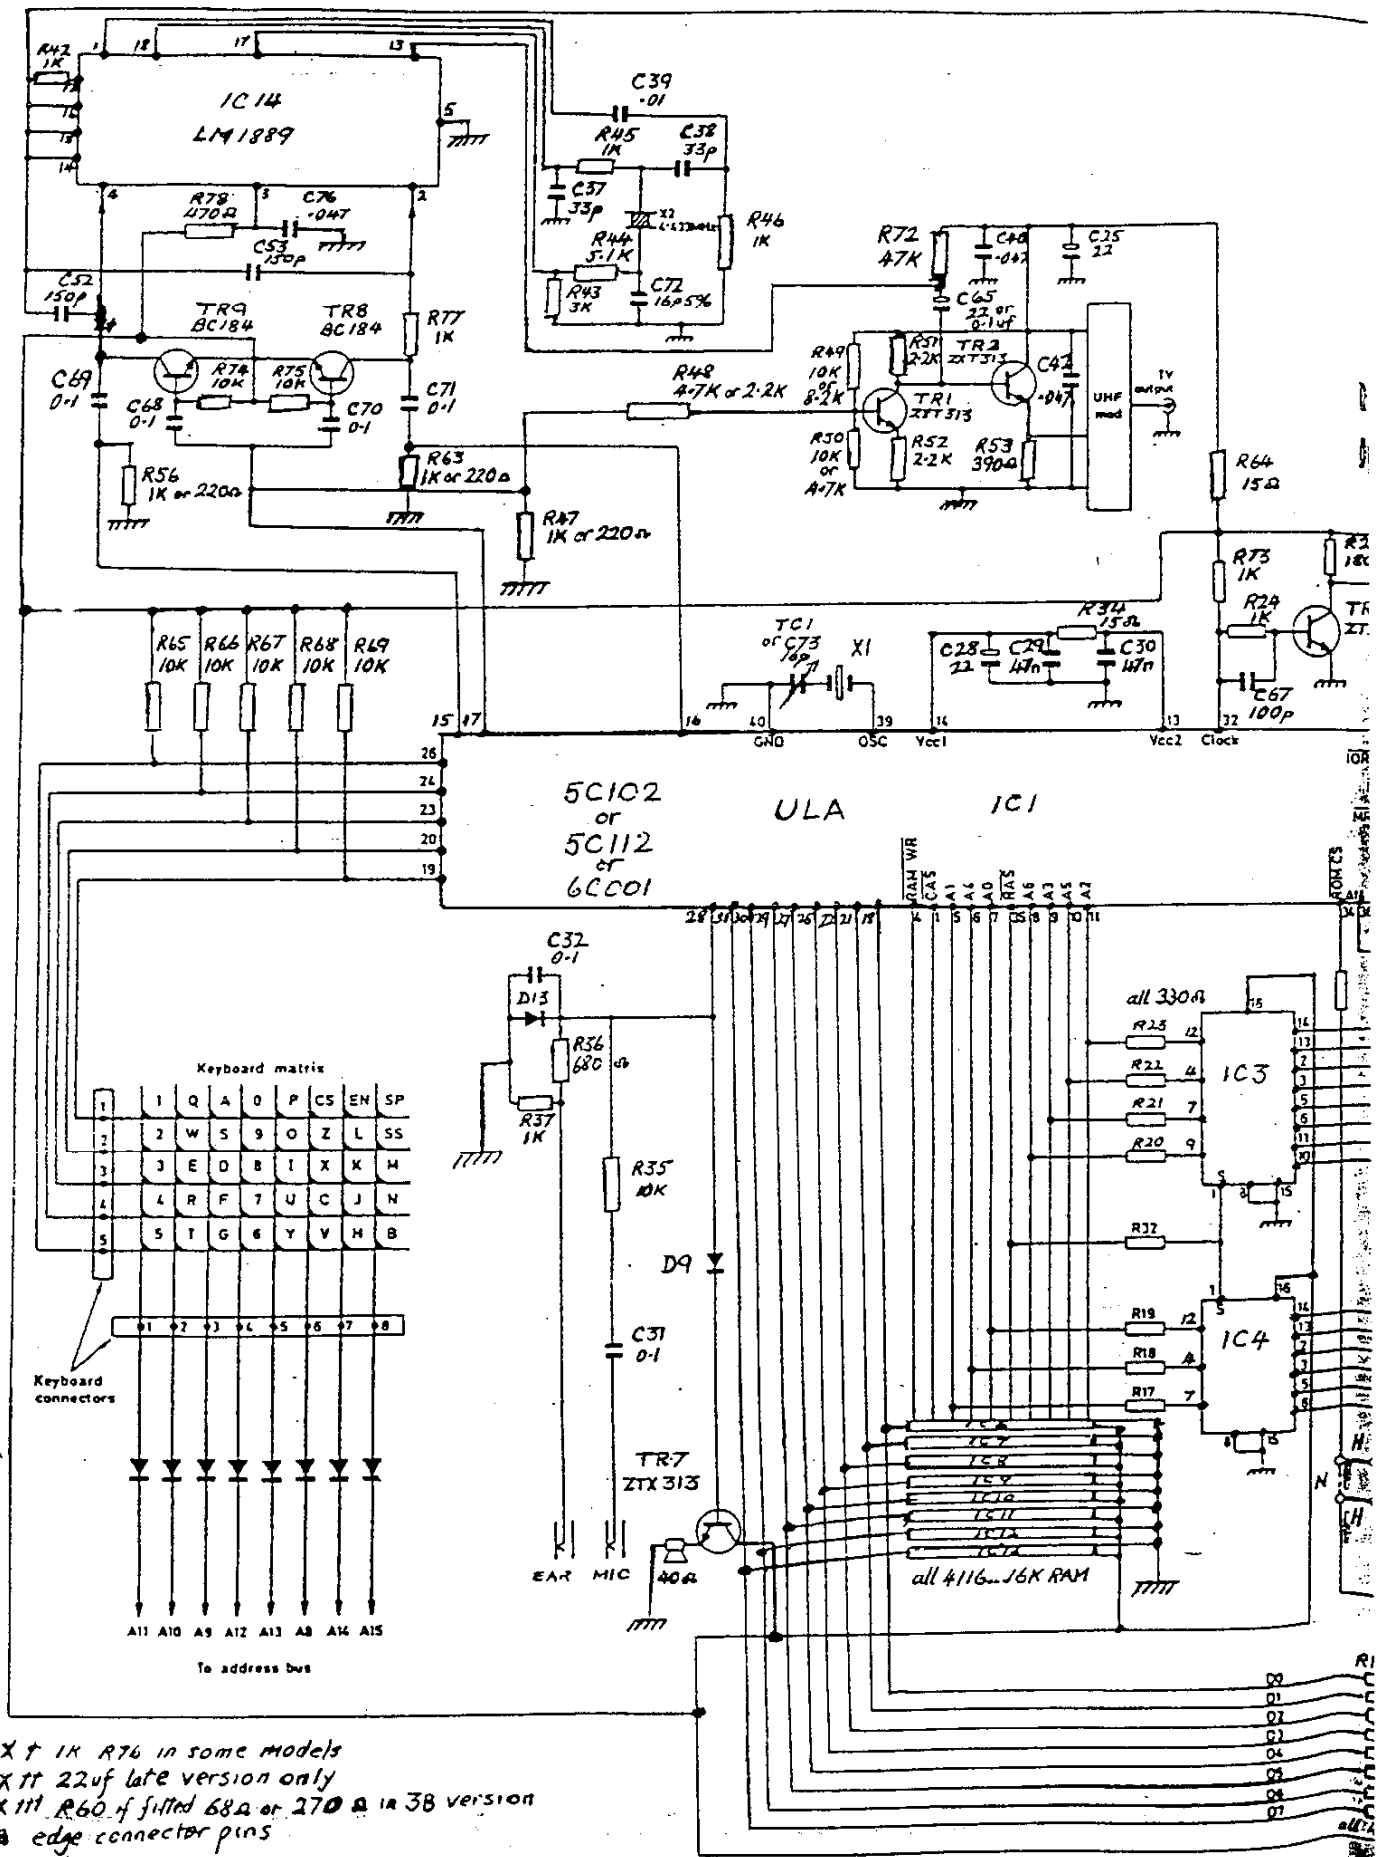

X† 1K R76 in some models
 X†† 22uf late version only
 X††† R60 of fitted 68Ω or 270 Ω in 3B version
 edge connector pins

Sin

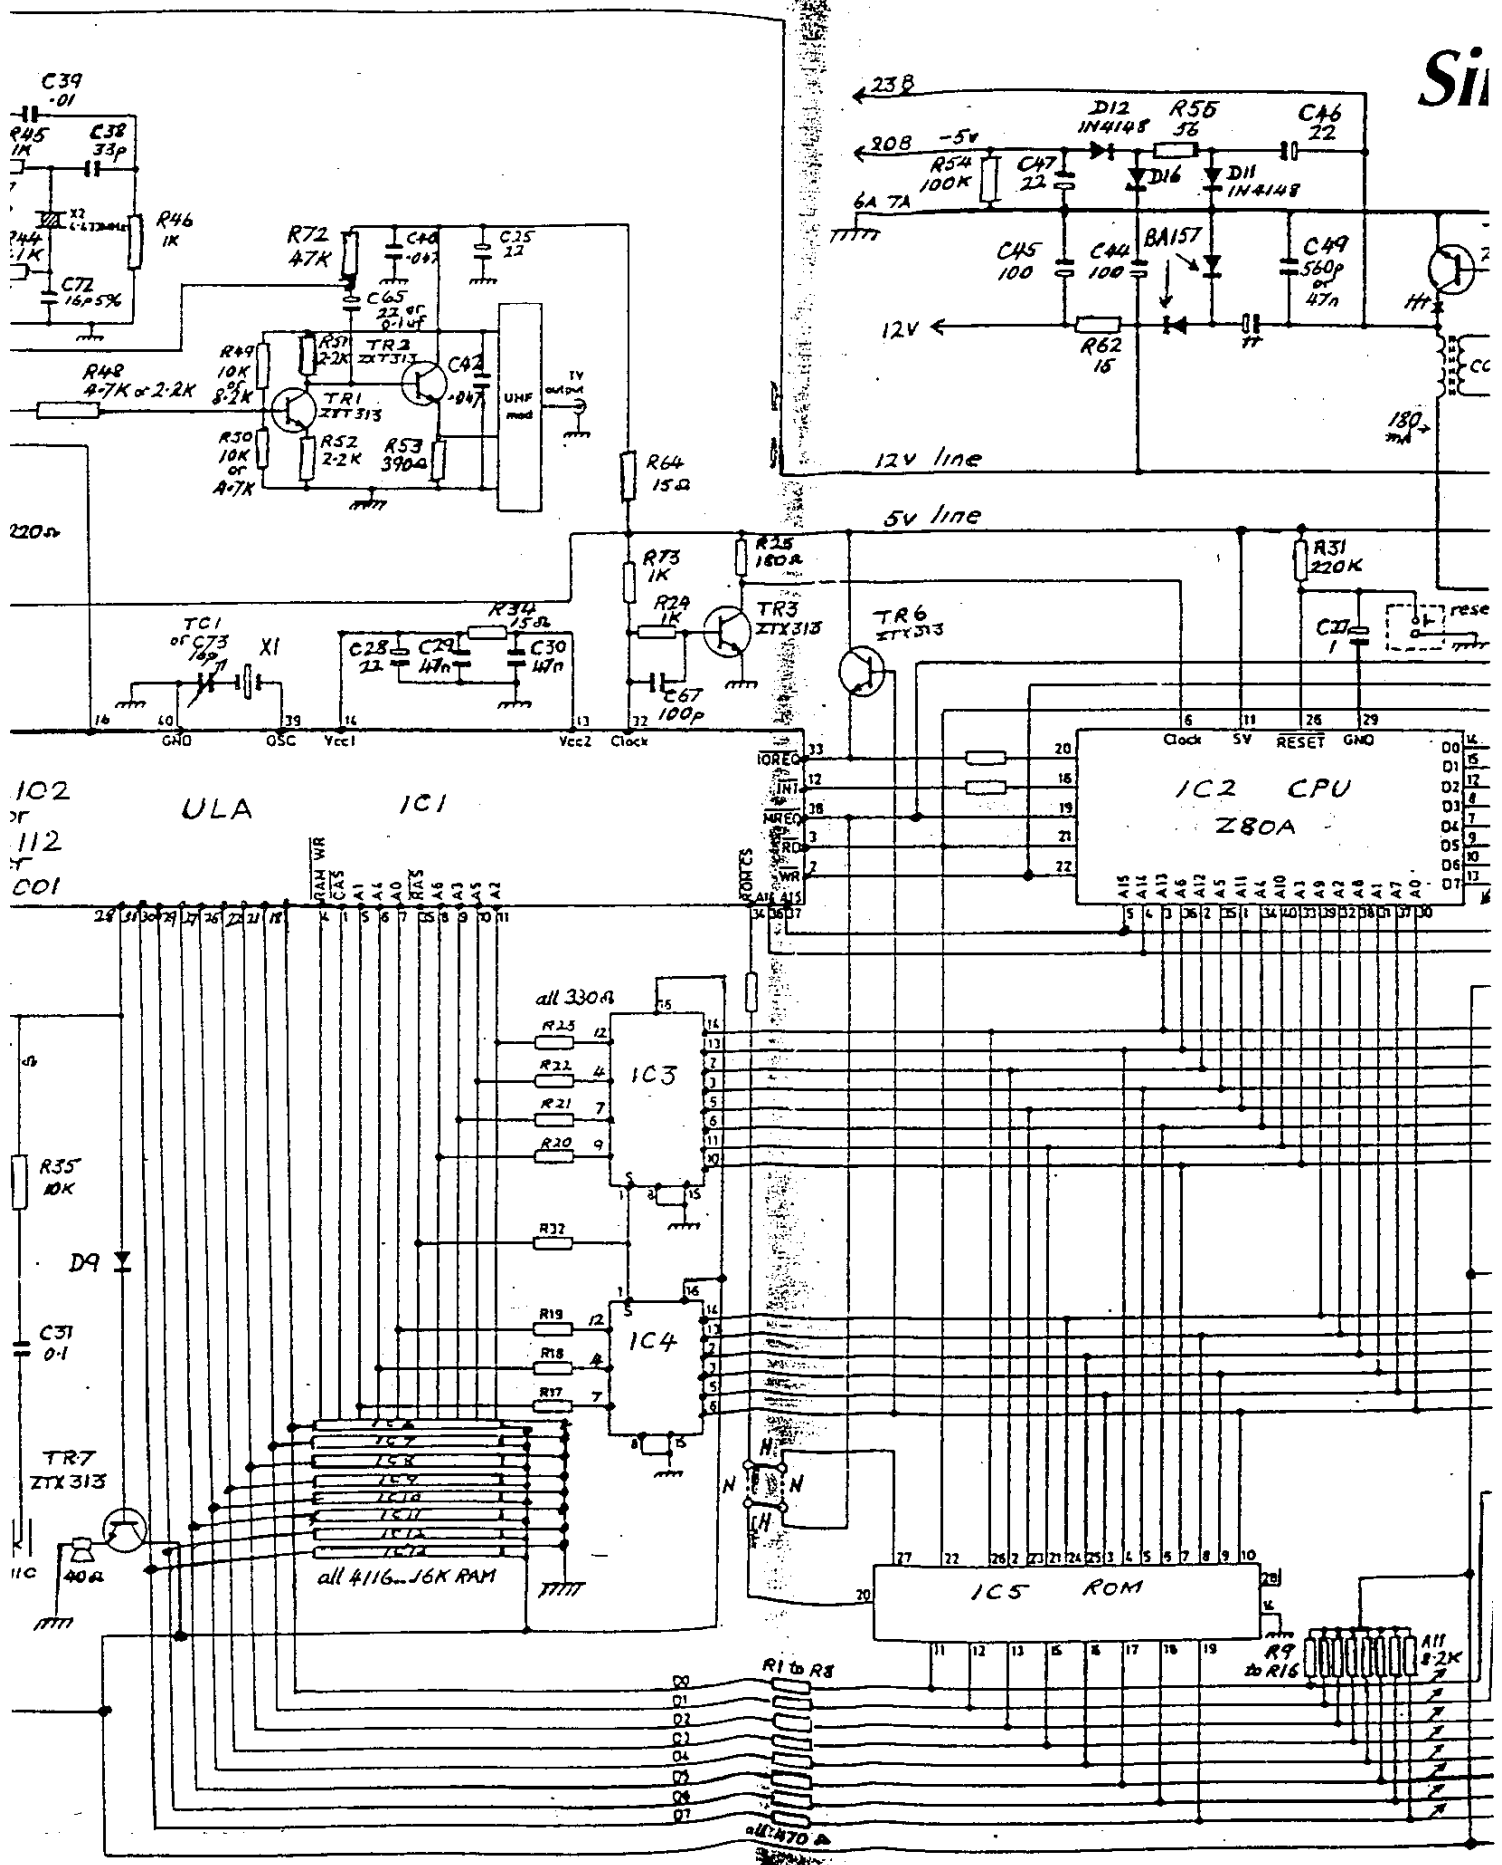

102
112
CO1

ULA

IC1

IC2 CPU
Z80A

all 330A

IC3

IC4

all 4116 16K RAM


IC5 ROM

R9
to R16




R1 to R8

all 70


Sinclair Spectrum

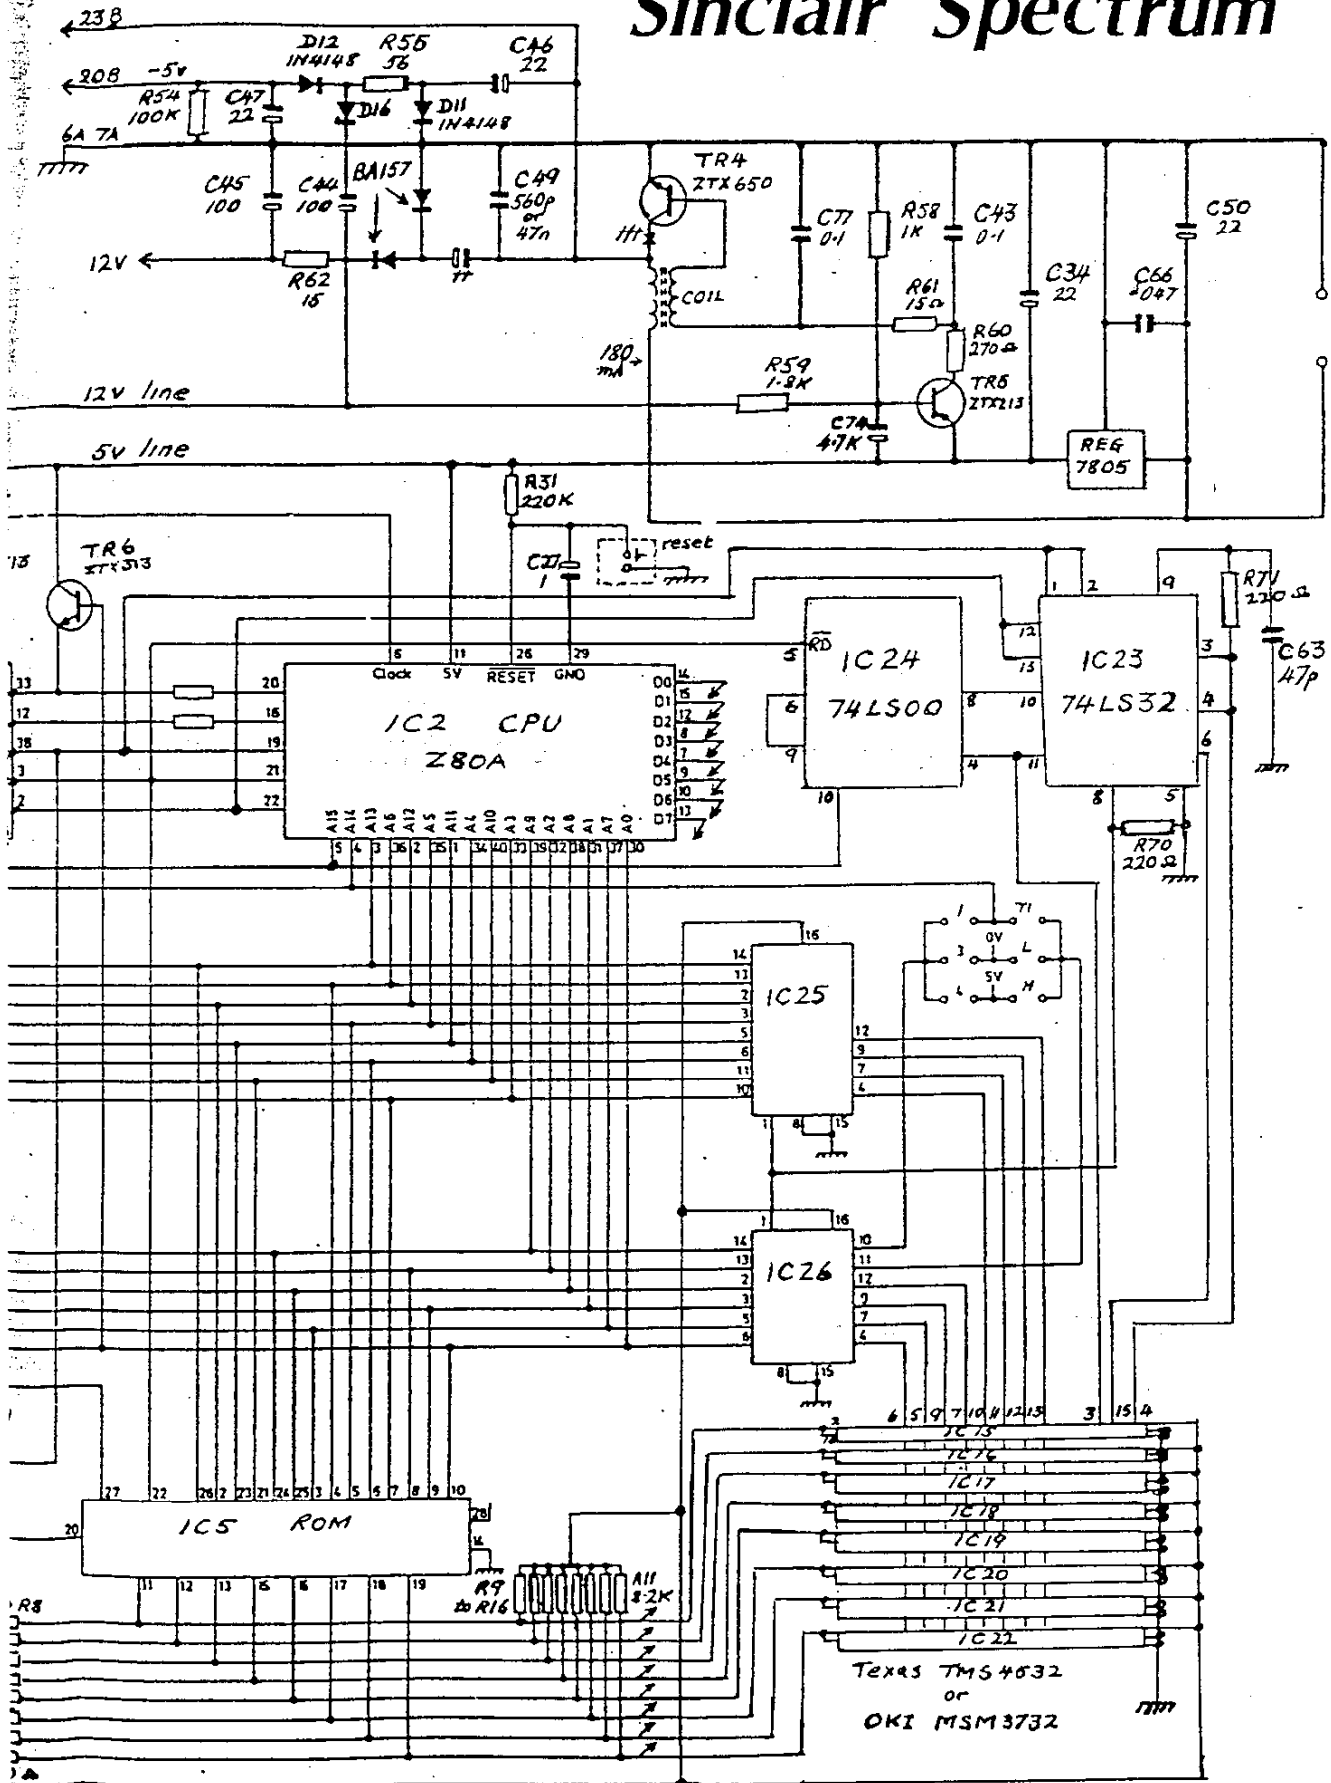


12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

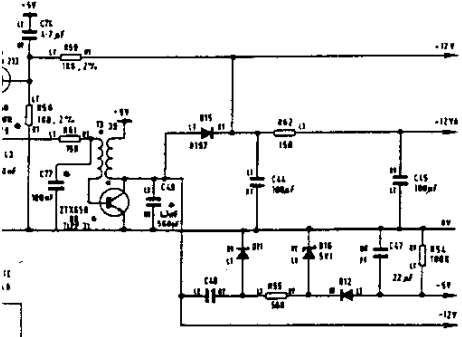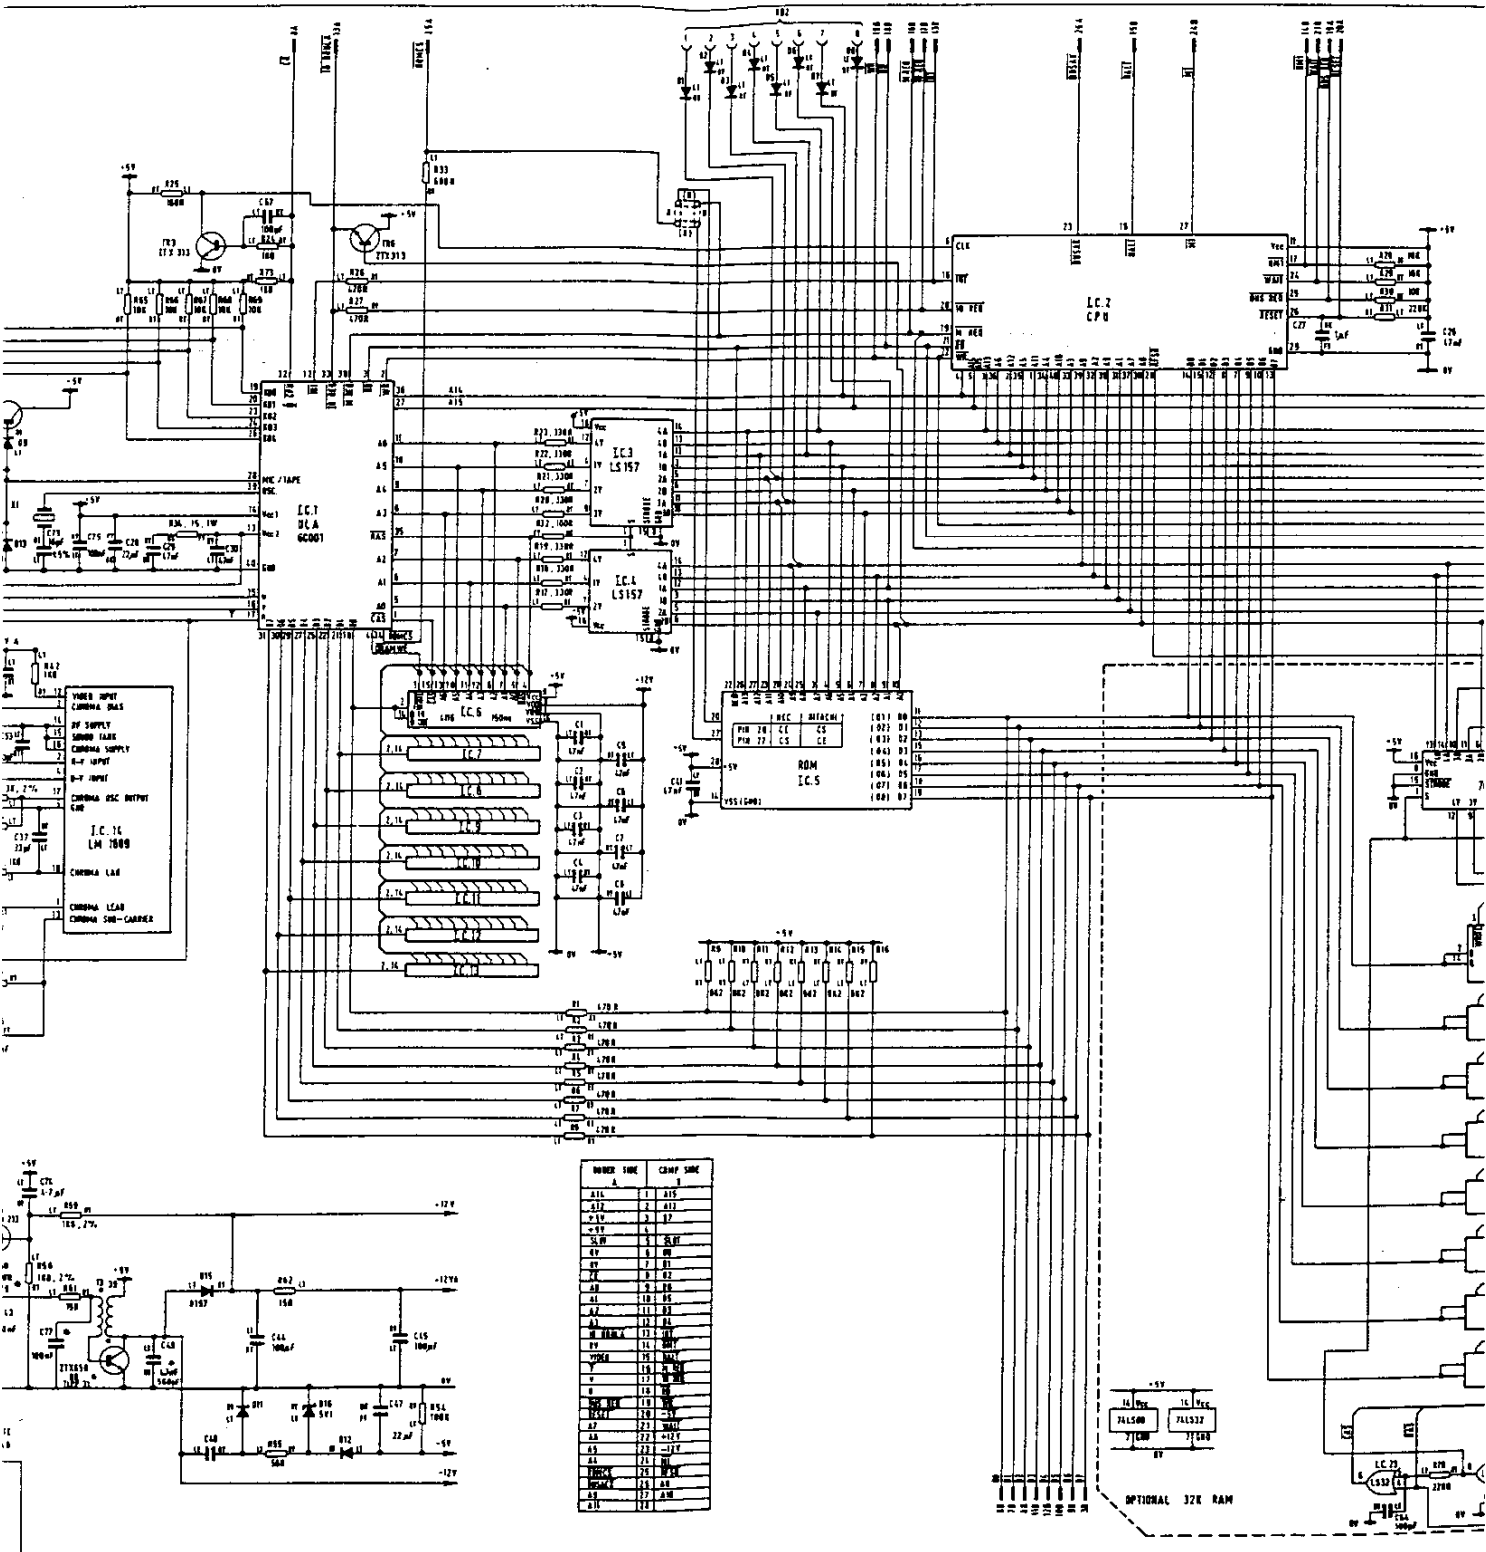

NUMBER	SIDE	VALUE	TYPE	NUMBER	SIDE	VALUE	TYPE
A16	1	A15					
A17	2	A13					
A18	3	A7					
A19	4	A10					
A20	5	A11					
A21	6	A12					
A22	7	A14					
A23	8	A1					
A24	9	A2					
A25	10	A3					
A26	11	A4					
A27	12	A5					
A28	13	A6					
A29	14	A8					
A30	15	A9					
A31	16	A13					
A32	17	A14					
A33	18	A15					
A34	19	A16					
A35	20	A17					
A36	21	A18					
A37	22	A19					
A38	23	A20					
A39	24	A21					
A40	25	A22					
A41	26	A23					
A42	27	A24					
A43	28	A25					
A44	29	A26					
A45	30	A27					
A46	31	A28					
A47	32	A29					
A48	33	A30					
A49	34	A31					
A50	35	A32					
A51	36	A33					
A52	37	A34					
A53	38	A35					
A54	39	A36					
A55	40	A37					
A56	41	A38					
A57	42	A39					
A58	43	A40					
A59	44	A41					
A60	45	A42					
A61	46	A43					
A62	47	A44					
A63	48	A45					
A64	49	A46					
A65	50	A47					
A66	51	A48					
A67	52	A49					
A68	53	A50					
A69	54	A51					
A70	55	A52					
A71	56	A53					
A72	57	A54					
A73	58	A55					
A74	59	A56					
A75	60	A57					
A76	61	A58					
A77	62	A59					
A78	63	A60					
A79	64	A61					
A80	65	A62					
A81	66	A63					
A82	67	A64					
A83	68	A65					
A84	69	A66					
A85	70	A67					
A86	71	A68					
A87	72	A69					
A88	73	A70					
A89	74	A71					
A90	75	A72					
A91	76	A73					
A92	77	A74					
A93	78	A75					
A94	79	A76					
A95	80	A77					
A96	81	A78					
A97	82	A79					
A98	83	A80					
A99	84	A81					
A100	85	A82					




3, 10, 11, 12, 13, 14, 15, 16.	29, 30, 31.	56, 58, 59, 61, 62.	B
1, 2, 4, 5, 6, 7, 8.	27, 34, 36, 37.	56, 58, 59, 61, 62.	C
9.	LINEX REF. 3, 4, 5, 6, 7, 10.		D
10.			E
11.			F
12.			G
13.			H
14.			I
15.			J
16.			K
17.			L
18.			M
19.			N
20.			O
21.			P
22.			Q
23.			R
24.			S
25.			T
26.			U
27.			V
28.			W
29.			X
30.			Y
31.			Z



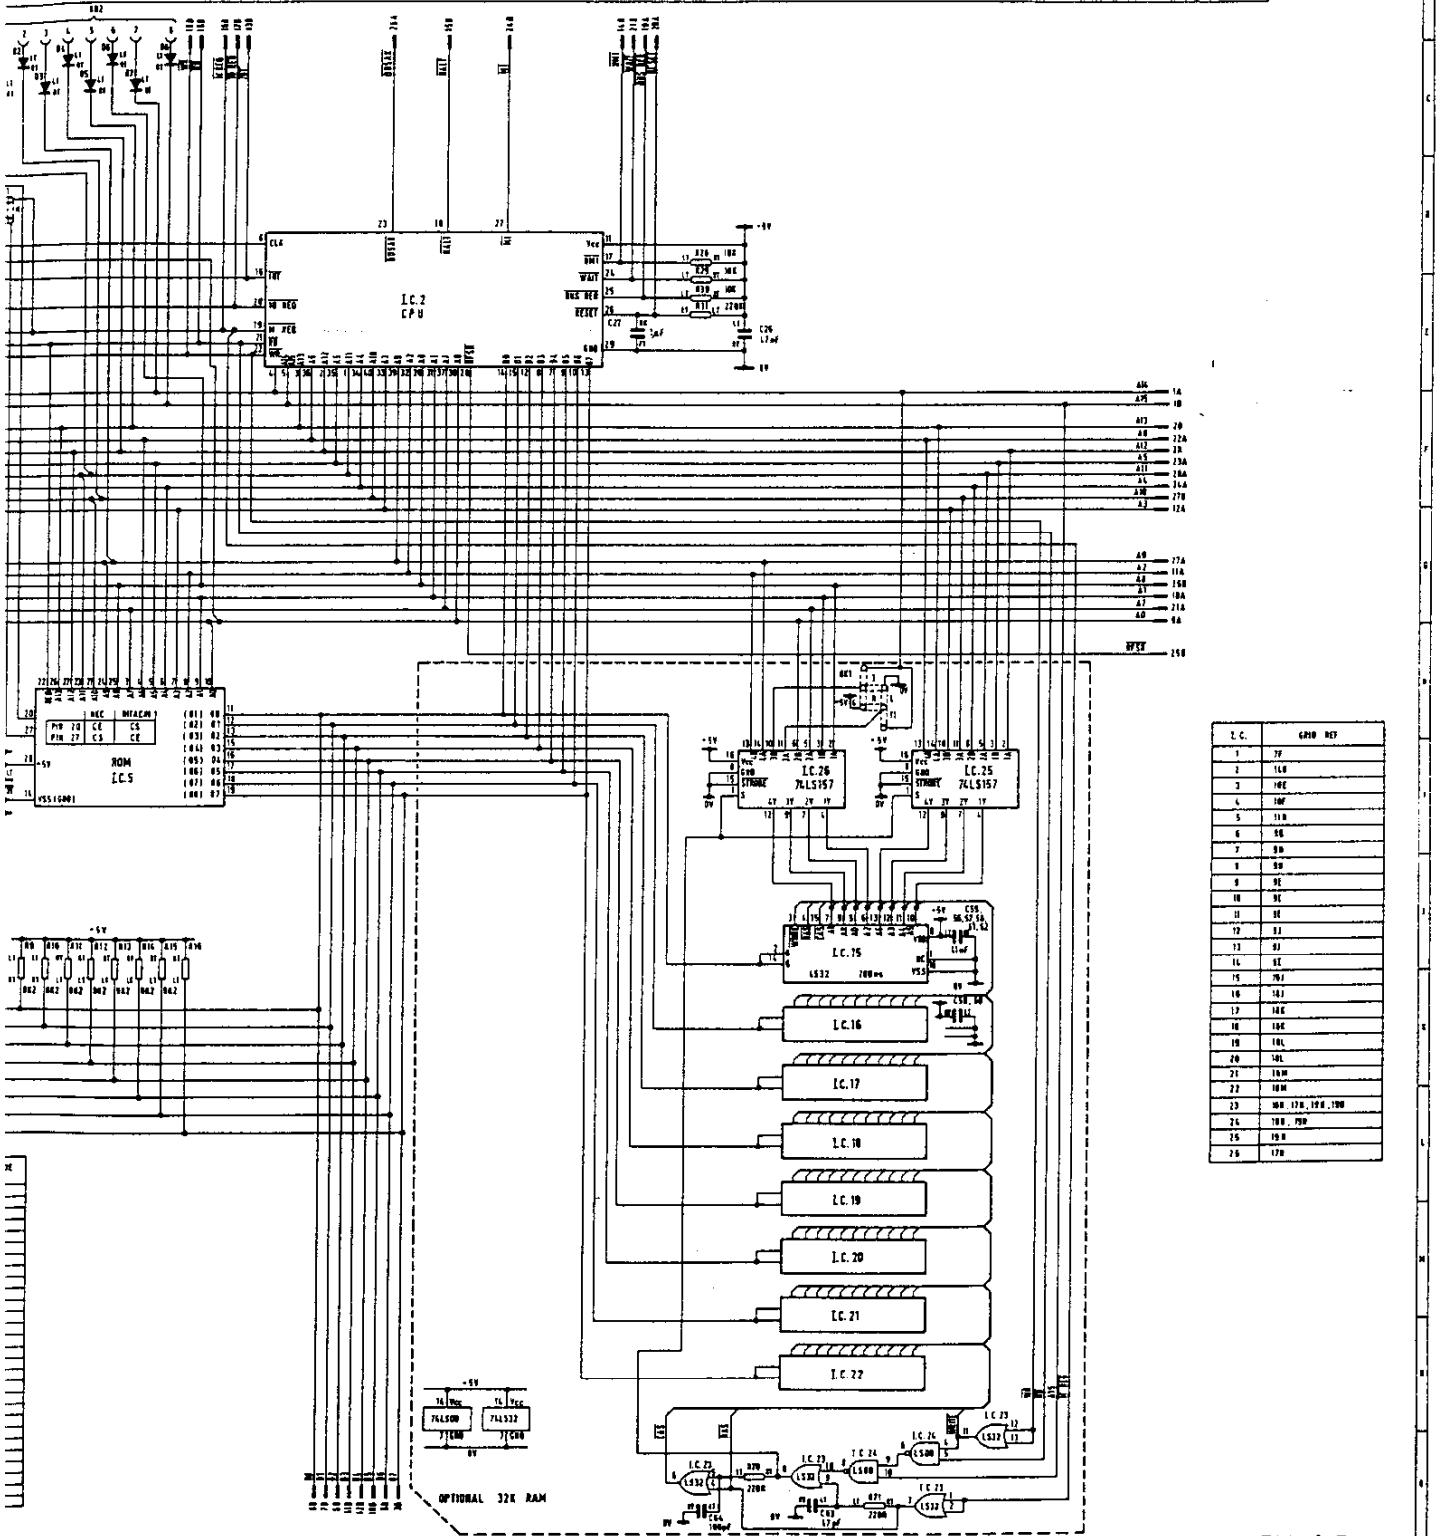


I.C.	GPIO REF.
1	7F
2	14B
3	19E
4	10F
5	11B
6	5B
7	5B
8	5B
9	5C
10	5C
11	5C
12	5C
13	5C
14	5C
15	5C
16	5C
17	5C
18	5C
19	5C
20	5C
21	5C
22	5C
23	5C, 17B, 17H, 17H, 17H
24	10B, 10B
25	10B
26	17B


ZX SPECTRUM (ISSUE 3) FIG. 1.5
CIRCUIT DIAGRAM · ESK12750
ISSUE A

74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

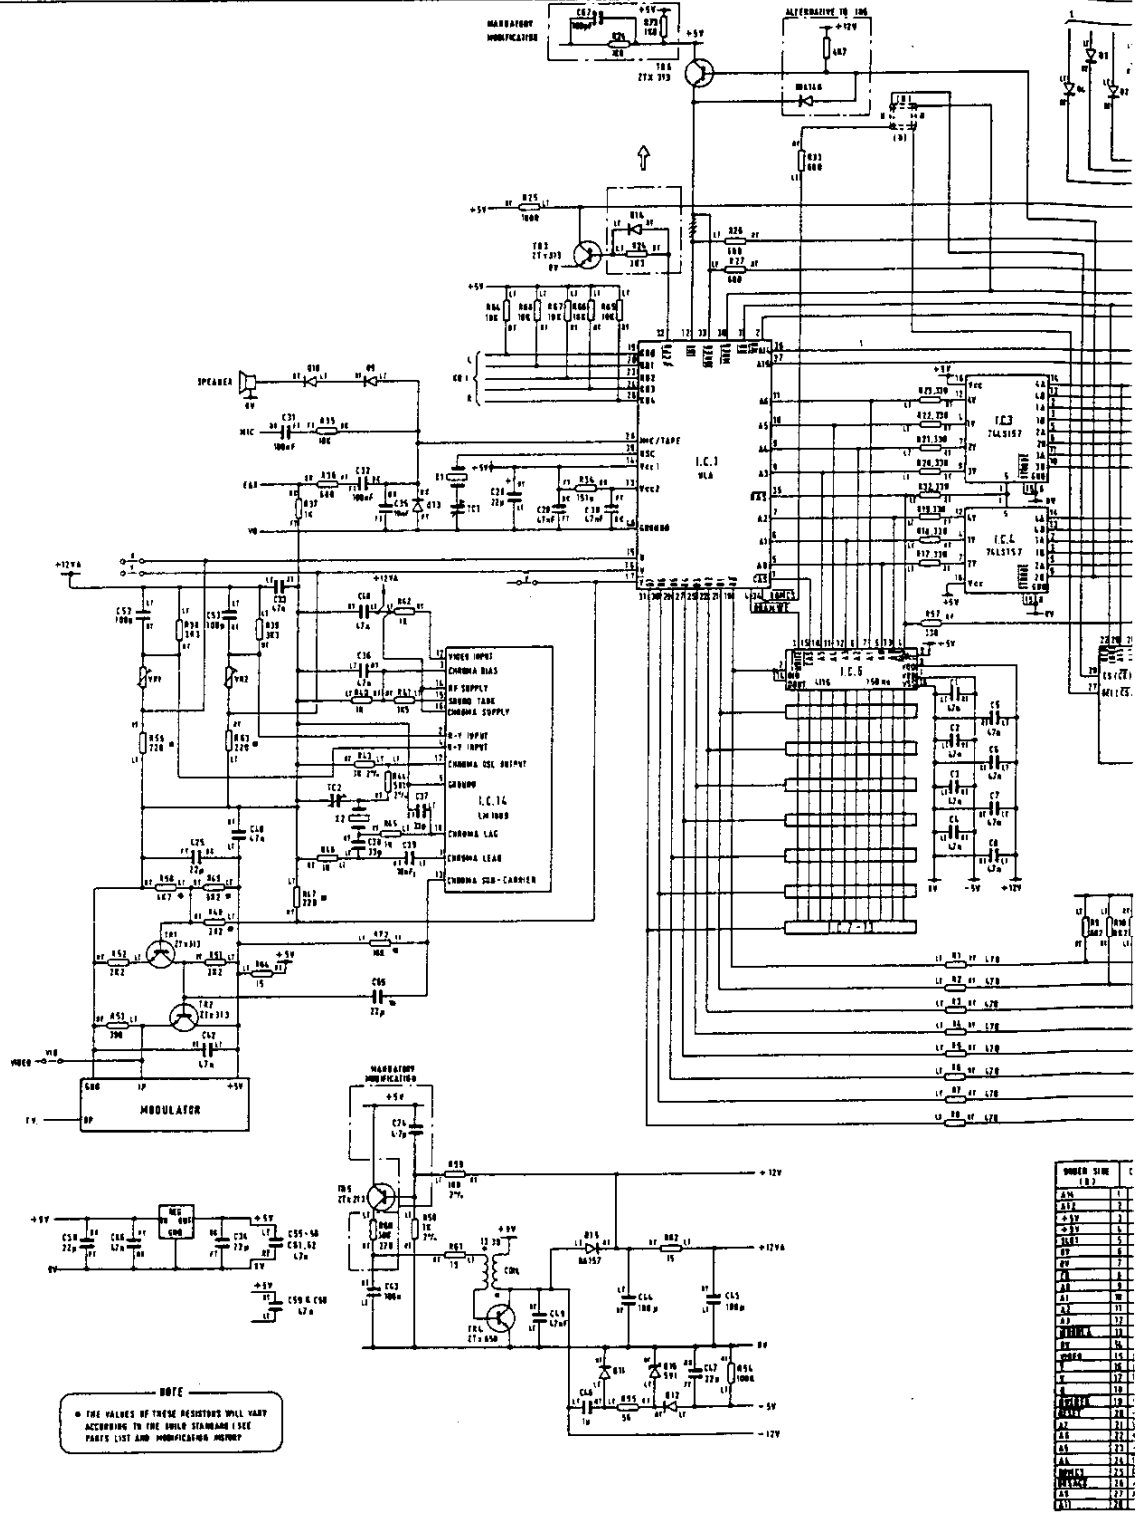


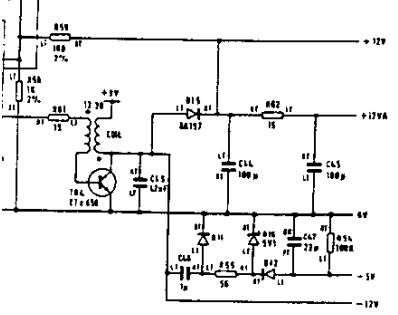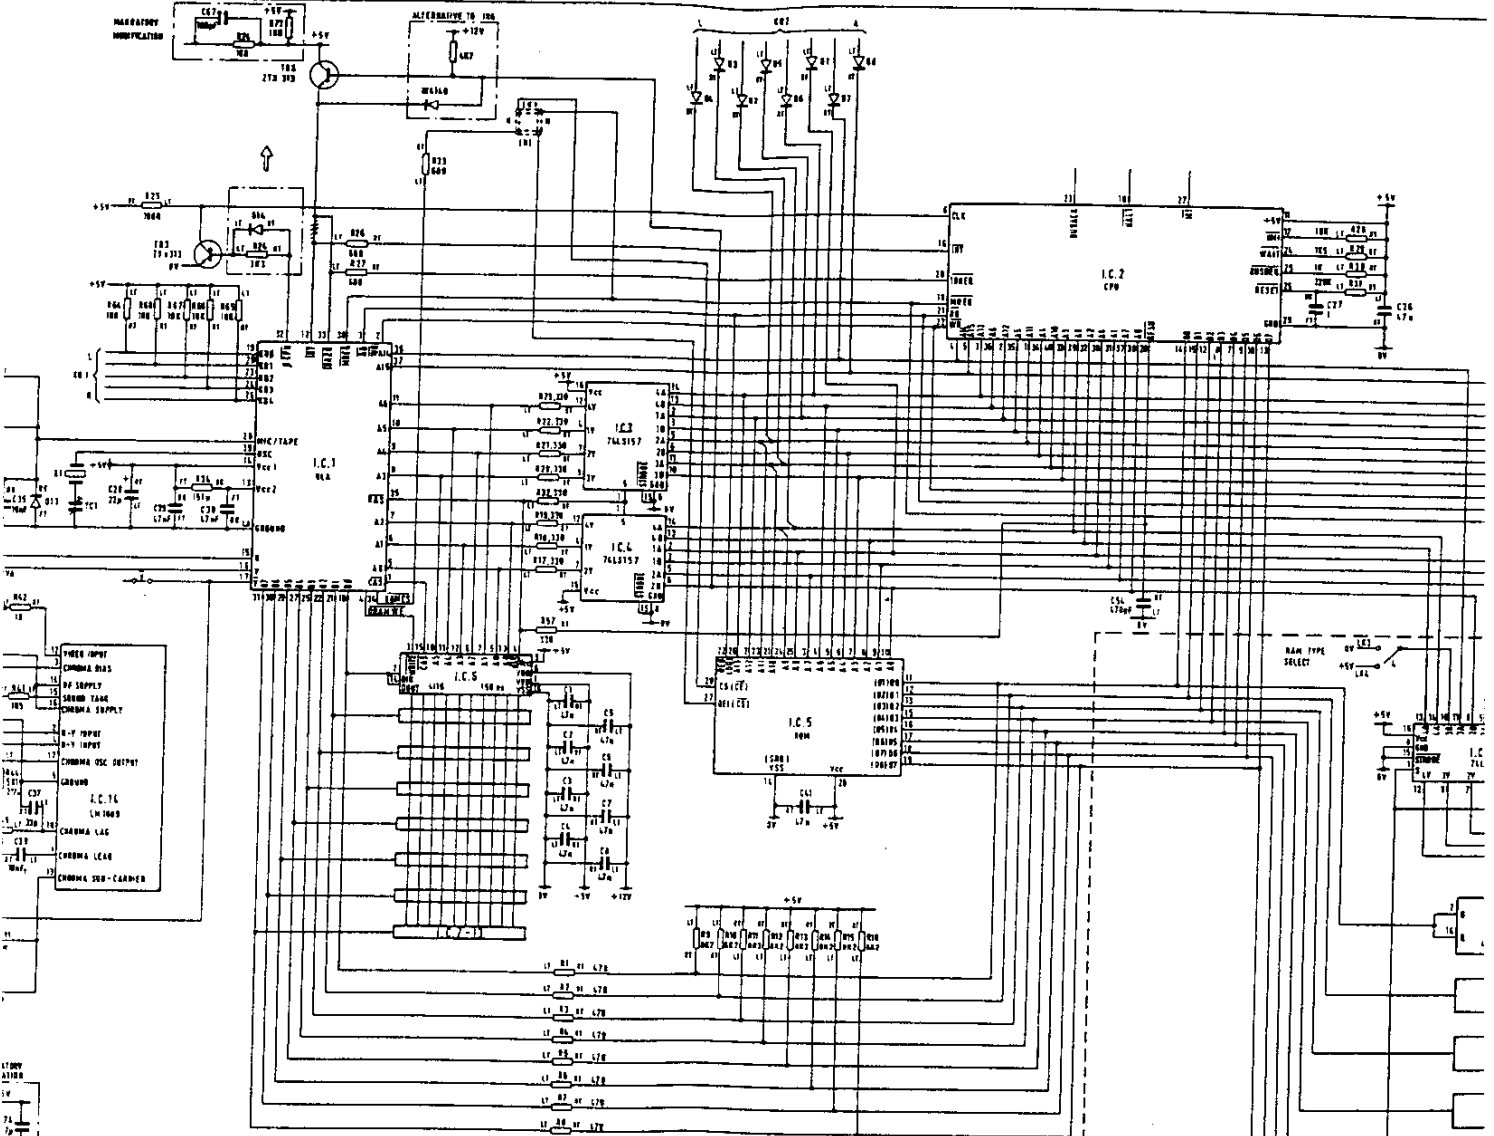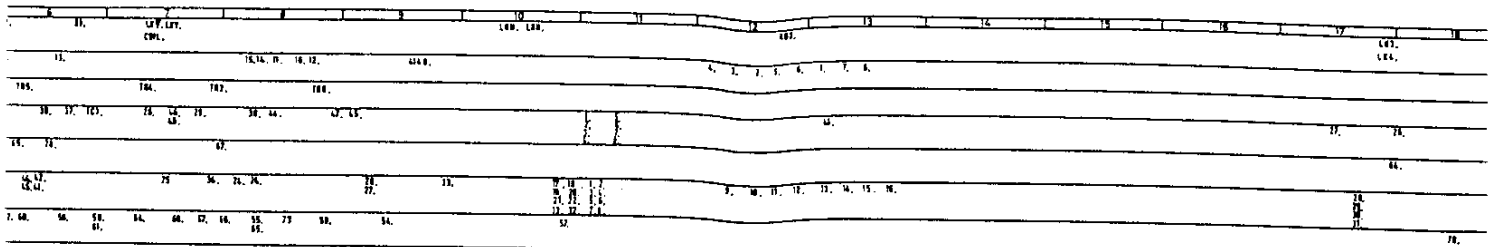

ORDER NO.	QTY	COMP. TYPE	VAL.
1001	1	RES	10K
1002	1	RES	100K
1003	1	RES	100K
1004	1	RES	100K
1005	1	RES	100K
1006	1	RES	100K
1007	1	RES	100K
1008	1	RES	100K
1009	1	RES	100K
1010	1	RES	100K
1011	1	RES	100K
1012	1	RES	100K
1013	1	RES	100K
1014	1	RES	100K
1015	1	RES	100K
1016	1	RES	100K
1017	1	RES	100K
1018	1	RES	100K
1019	1	RES	100K
1020	1	RES	100K
1021	1	RES	100K
1022	1	RES	100K
1023	1	RES	100K
1024	1	RES	100K
1025	1	RES	100K
1026	1	RES	100K
1027	1	RES	100K
1028	1	RES	100K
1029	1	RES	100K
1030	1	RES	100K
1031	1	RES	100K
1032	1	RES	100K
1033	1	RES	100K
1034	1	RES	100K
1035	1	RES	100K
1036	1	RES	100K
1037	1	RES	100K
1038	1	RES	100K
1039	1	RES	100K
1040	1	RES	100K
1041	1	RES	100K
1042	1	RES	100K
1043	1	RES	100K
1044	1	RES	100K
1045	1	RES	100K
1046	1	RES	100K
1047	1	RES	100K
1048	1	RES	100K
1049	1	RES	100K
1050	1	RES	100K
1051	1	RES	100K
1052	1	RES	100K
1053	1	RES	100K
1054	1	RES	100K
1055	1	RES	100K
1056	1	RES	100K
1057	1	RES	100K
1058	1	RES	100K
1059	1	RES	100K
1060	1	RES	100K
1061	1	RES	100K
1062	1	RES	100K
1063	1	RES	100K
1064	1	RES	100K
1065	1	RES	100K
1066	1	RES	100K
1067	1	RES	100K
1068	1	RES	100K
1069	1	RES	100K
1070	1	RES	100K
1071	1	RES	100K
1072	1	RES	100K
1073	1	RES	100K
1074	1	RES	100K
1075	1	RES	100K
1076	1	RES	100K
1077	1	RES	100K
1078	1	RES	100K
1079	1	RES	100K
1080	1	RES	100K
1081	1	RES	100K
1082	1	RES	100K
1083	1	RES	100K
1084	1	RES	100K
1085	1	RES	100K
1086	1	RES	100K
1087	1	RES	100K
1088	1	RES	100K
1089	1	RES	100K
1090	1	RES	100K
1091	1	RES	100K
1092	1	RES	100K
1093	1	RES	100K
1094	1	RES	100K
1095	1	RES	100K
1096	1	RES	100K
1097	1	RES	100K
1098	1	RES	100K
1099	1	RES	100K
1100	1	RES	100K

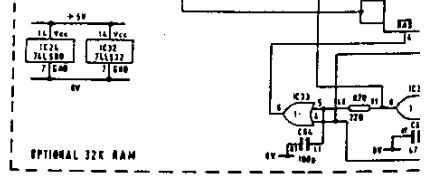

13	14	15	16	17	18	19	20	21	22
100.									MISC.
11. 12. 13. 14. 15. 16.									0
17. 18.									1B
19. 20. 21. 22.									C
23. 24. 25. 26.									0
27. 28.									
29. 30.									

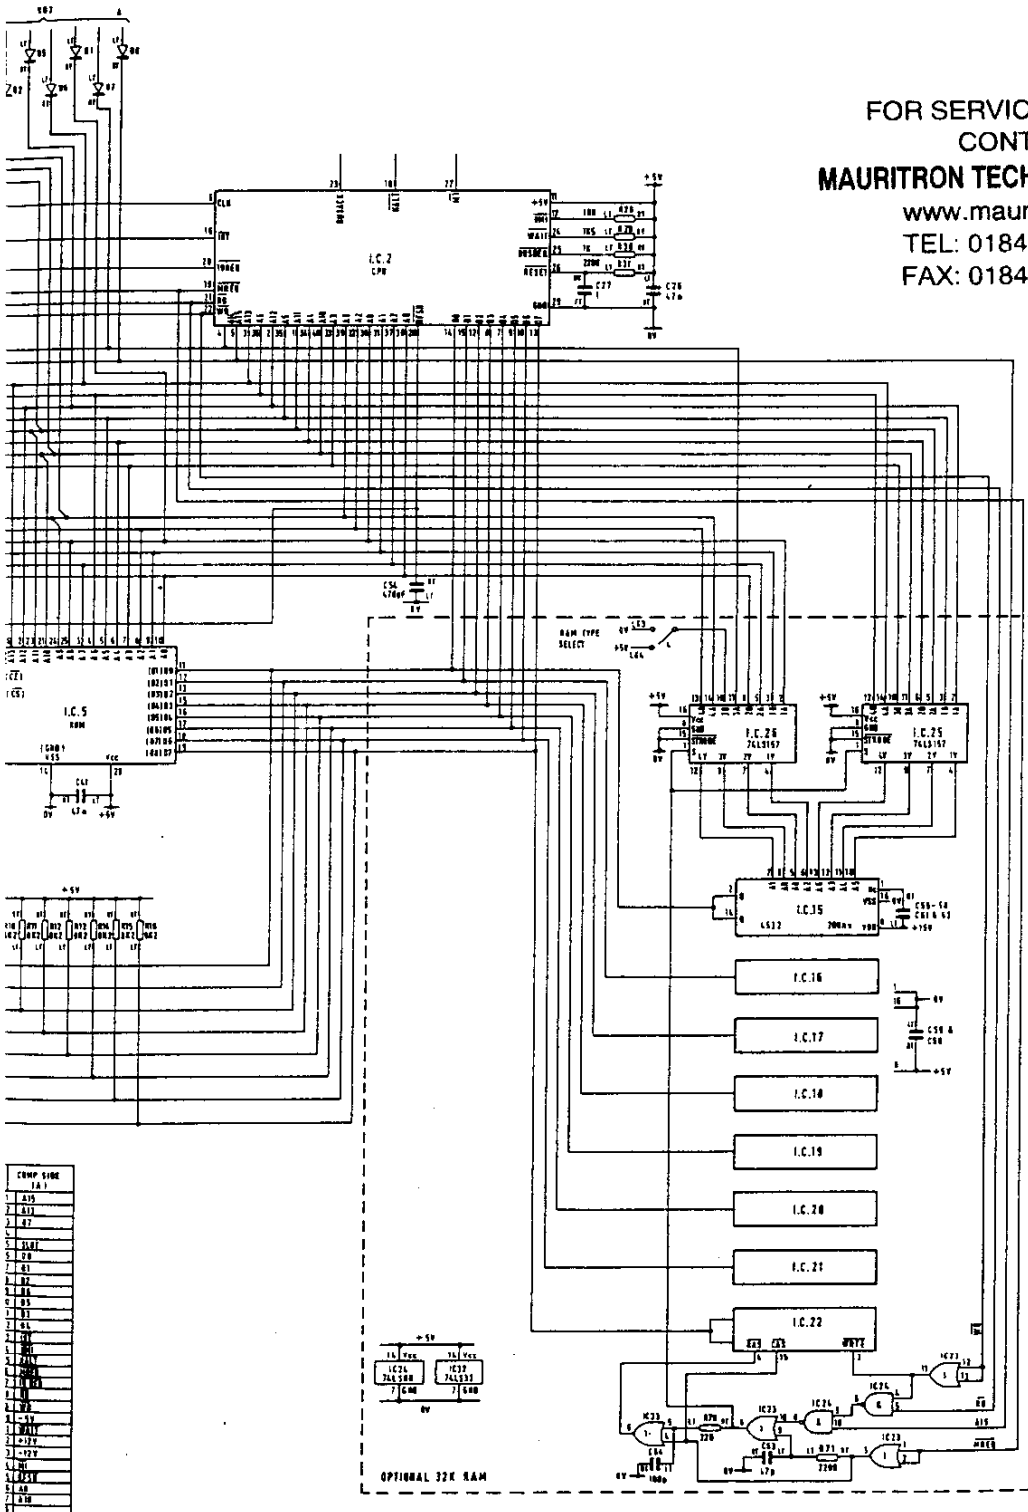


FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

LAST IC No - IC26
LAST TEST No - 872
LAST CPU No - C50
LAST ROM No - G16
LAST TRAYS No - 106
BT-DIA - 18 416
ALL OTHER RESISTORS ±5%

IC No.	MAN REF
1	100
2	142
3	177
4	176
5	138
6	100
7	100, 111
8	100, 111
9	110, 111
10	100, 111
11	100, 111
12	100, 111
13	100, 111
14	100
15	176
16	176
17	177
18	176
19	177
20	177
21	177
22	177
23	152, 169, 171
24	152, 171
25	176
26	100

COMP SIDE	TRAY
1	A15
2	A11
3	A7
4	A10
5	D8
6	B1
7	B2
8	B4
9	B5
10	B3
11	B6
12	B7
13	B8
14	B9
15	B10
16	B11
17	B12
18	B13
19	B14
20	B15
21	B16
22	B17
23	B18
24	B19
25	B20
26	B21
27	B22
28	B23
29	B24
30	B25
31	B26
32	B27
33	B28
34	B29
35	B30
36	B31
37	B32
38	B33
39	B34
40	B35
41	B36
42	B37
43	B38
44	B39
45	B40
46	B41
47	B42
48	B43
49	B44
50	B45
51	B46
52	B47
53	B48
54	B49
55	B50
56	B51
57	B52
58	B53
59	B54
60	B55
61	B56
62	B57
63	B58
64	B59
65	B60
66	B61
67	B62
68	B63
69	B64
70	B65
71	B66
72	B67
73	B68
74	B69
75	B70
76	B71
77	B72
78	B73
79	B74
80	B75
81	B76
82	B77
83	B78
84	B79
85	B80
86	B81
87	B82
88	B83
89	B84
90	B85
91	B86
92	B87
93	B88
94	B89
95	B90
96	B91
97	B92
98	B93
99	B94
100	B95

ZX SPECTRUM (ISSUE 2) FIG. 1.4
CIRCUIT DIAGRAM ESK 12740
ISSUE 1A

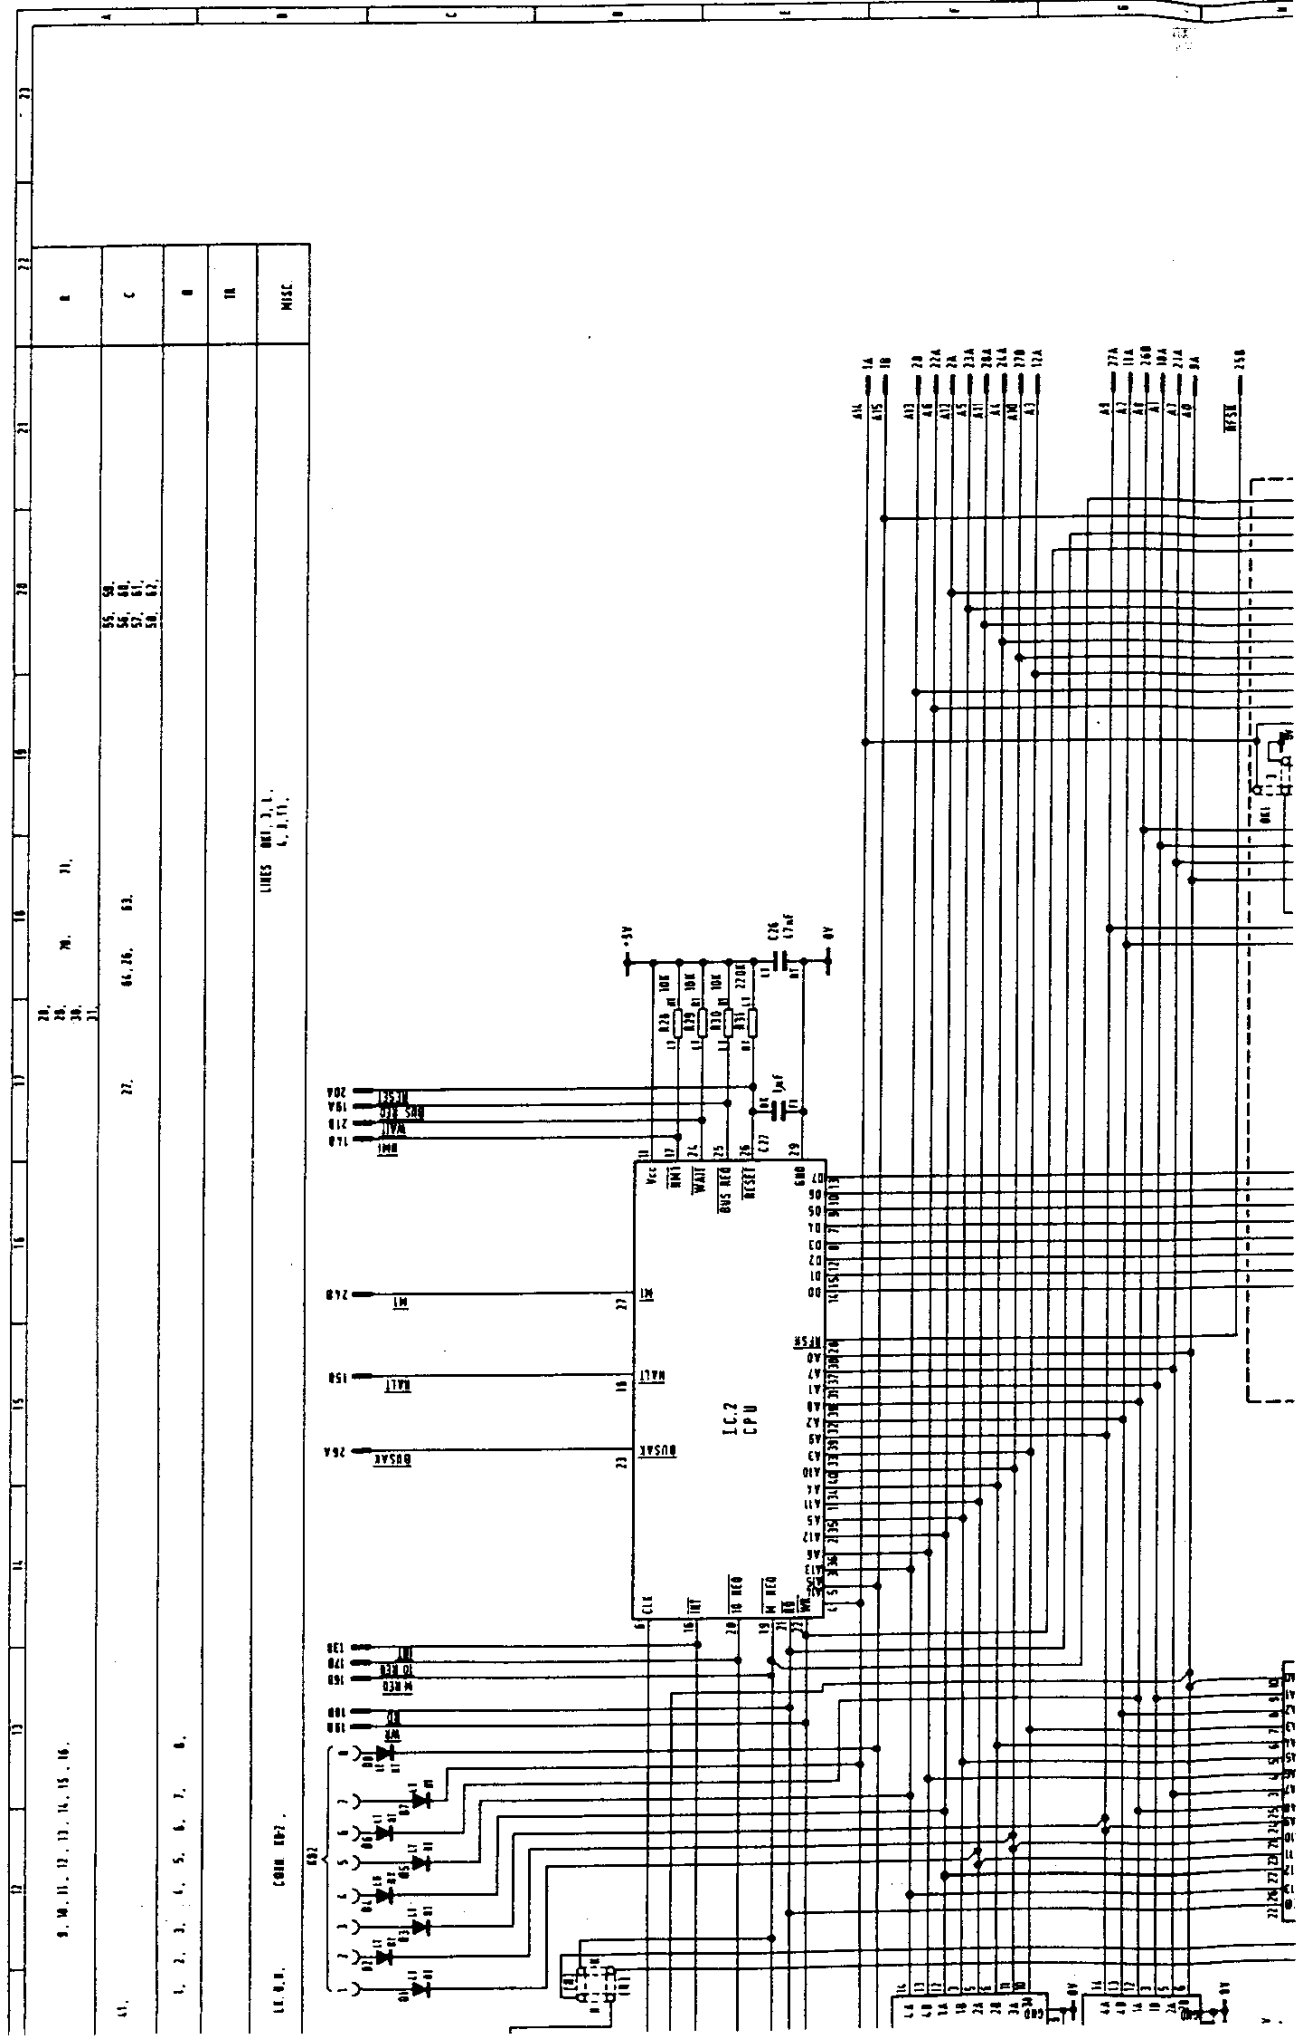


LINE NO.	COMP. REF.	VALUES	LINE NO.	VALUES
9, 10, 11, 12, 13, 14, 15, 16,			21	
17, 18, 19, 20,			22	
21, 22, 23, 24, 25, 26,			23	
27, 28, 29, 30,			24	
31, 32, 33, 34, 35, 36, 37,			25	
38, 39, 40, 41, 42,			26	
43, 44, 45, 46, 47, 48,			27	
49, 50, 51, 52, 53, 54,			28	
55, 56, 57, 58, 59,			29	
60, 61, 62, 63, 64,			30	
65, 66, 67, 68, 69,			31	
70, 71, 72, 73, 74,			32	
75, 76, 77, 78, 79,			33	
80, 81, 82, 83, 84,			34	
85, 86, 87, 88, 89,			35	
90, 91, 92, 93, 94,			36	
95, 96, 97, 98, 99,			37	
100, 101, 102, 103, 104,			38	
105, 106, 107, 108, 109,			39	
110, 111, 112, 113, 114,			40	
115, 116, 117, 118, 119,			41	
120, 121, 122, 123, 124,			42	
125, 126, 127, 128, 129,			43	
130, 131, 132, 133, 134,			44	
135, 136, 137, 138, 139,			45	
140, 141, 142, 143, 144,			46	
145, 146, 147, 148, 149,			47	
150, 151, 152, 153, 154,			48	
155, 156, 157, 158, 159,			49	
160, 161, 162, 163, 164,			50	
165, 166, 167, 168, 169,			51	
170, 171, 172, 173, 174,			52	
175, 176, 177, 178, 179,			53	
180, 181, 182, 183, 184,			54	
185, 186, 187, 188, 189,			55	
190, 191, 192, 193, 194,			56	
195, 196, 197, 198, 199,			57	
200, 201, 202, 203, 204,			58	
205, 206, 207, 208, 209,			59	
210, 211, 212, 213, 214,			60	
215, 216, 217, 218, 219,			61	
220, 221, 222, 223, 224,			62	
225, 226, 227, 228, 229,			63	
230, 231, 232, 233, 234,			64	
235, 236, 237, 238, 239,			65	
240, 241, 242, 243, 244,			66	
245, 246, 247, 248, 249,			67	
250, 251, 252, 253, 254,			68	
255, 256, 257, 258, 259,			69	
260, 261, 262, 263, 264,			70	
265, 266, 267, 268, 269,			71	
270, 271, 272, 273, 274,			72	
275, 276, 277, 278, 279,			73	
280, 281, 282, 283, 284,			74	
285, 286, 287, 288, 289,			75	
290, 291, 292, 293, 294,			76	
295, 296, 297, 298, 299,			77	
300, 301, 302, 303, 304,			78	
305, 306, 307, 308, 309,			79	
310, 311, 312, 313, 314,			80	
315, 316, 317, 318, 319,			81	
320, 321, 322, 323, 324,			82	
325, 326, 327, 328, 329,			83	
330, 331, 332, 333, 334,			84	
335, 336, 337, 338, 339,			85	
340, 341, 342, 343, 344,			86	
345, 346, 347, 348, 349,			87	
350, 351, 352, 353, 354,			88	
355, 356, 357, 358, 359,			89	
360, 361, 362, 363, 364,			90	
365, 366, 367, 368, 369,			91	
370, 371, 372, 373, 374,			92	
375, 376, 377, 378, 379,			93	
380, 381, 382, 383, 384,			94	
385, 386, 387, 388, 389,			95	
390, 391, 392, 393, 394,			96	
395, 396, 397, 398, 399,			97	
400, 401, 402, 403, 404,			98	
405, 406, 407, 408, 409,			99	
410, 411, 412, 413, 414,			100	

LINES 801, 3, 4, 5, 6, 7, 8, 9, 10, 11.


LINES 801, 2, 3, 4, 5, 6, 7, 8.

21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100.

RF3K 330

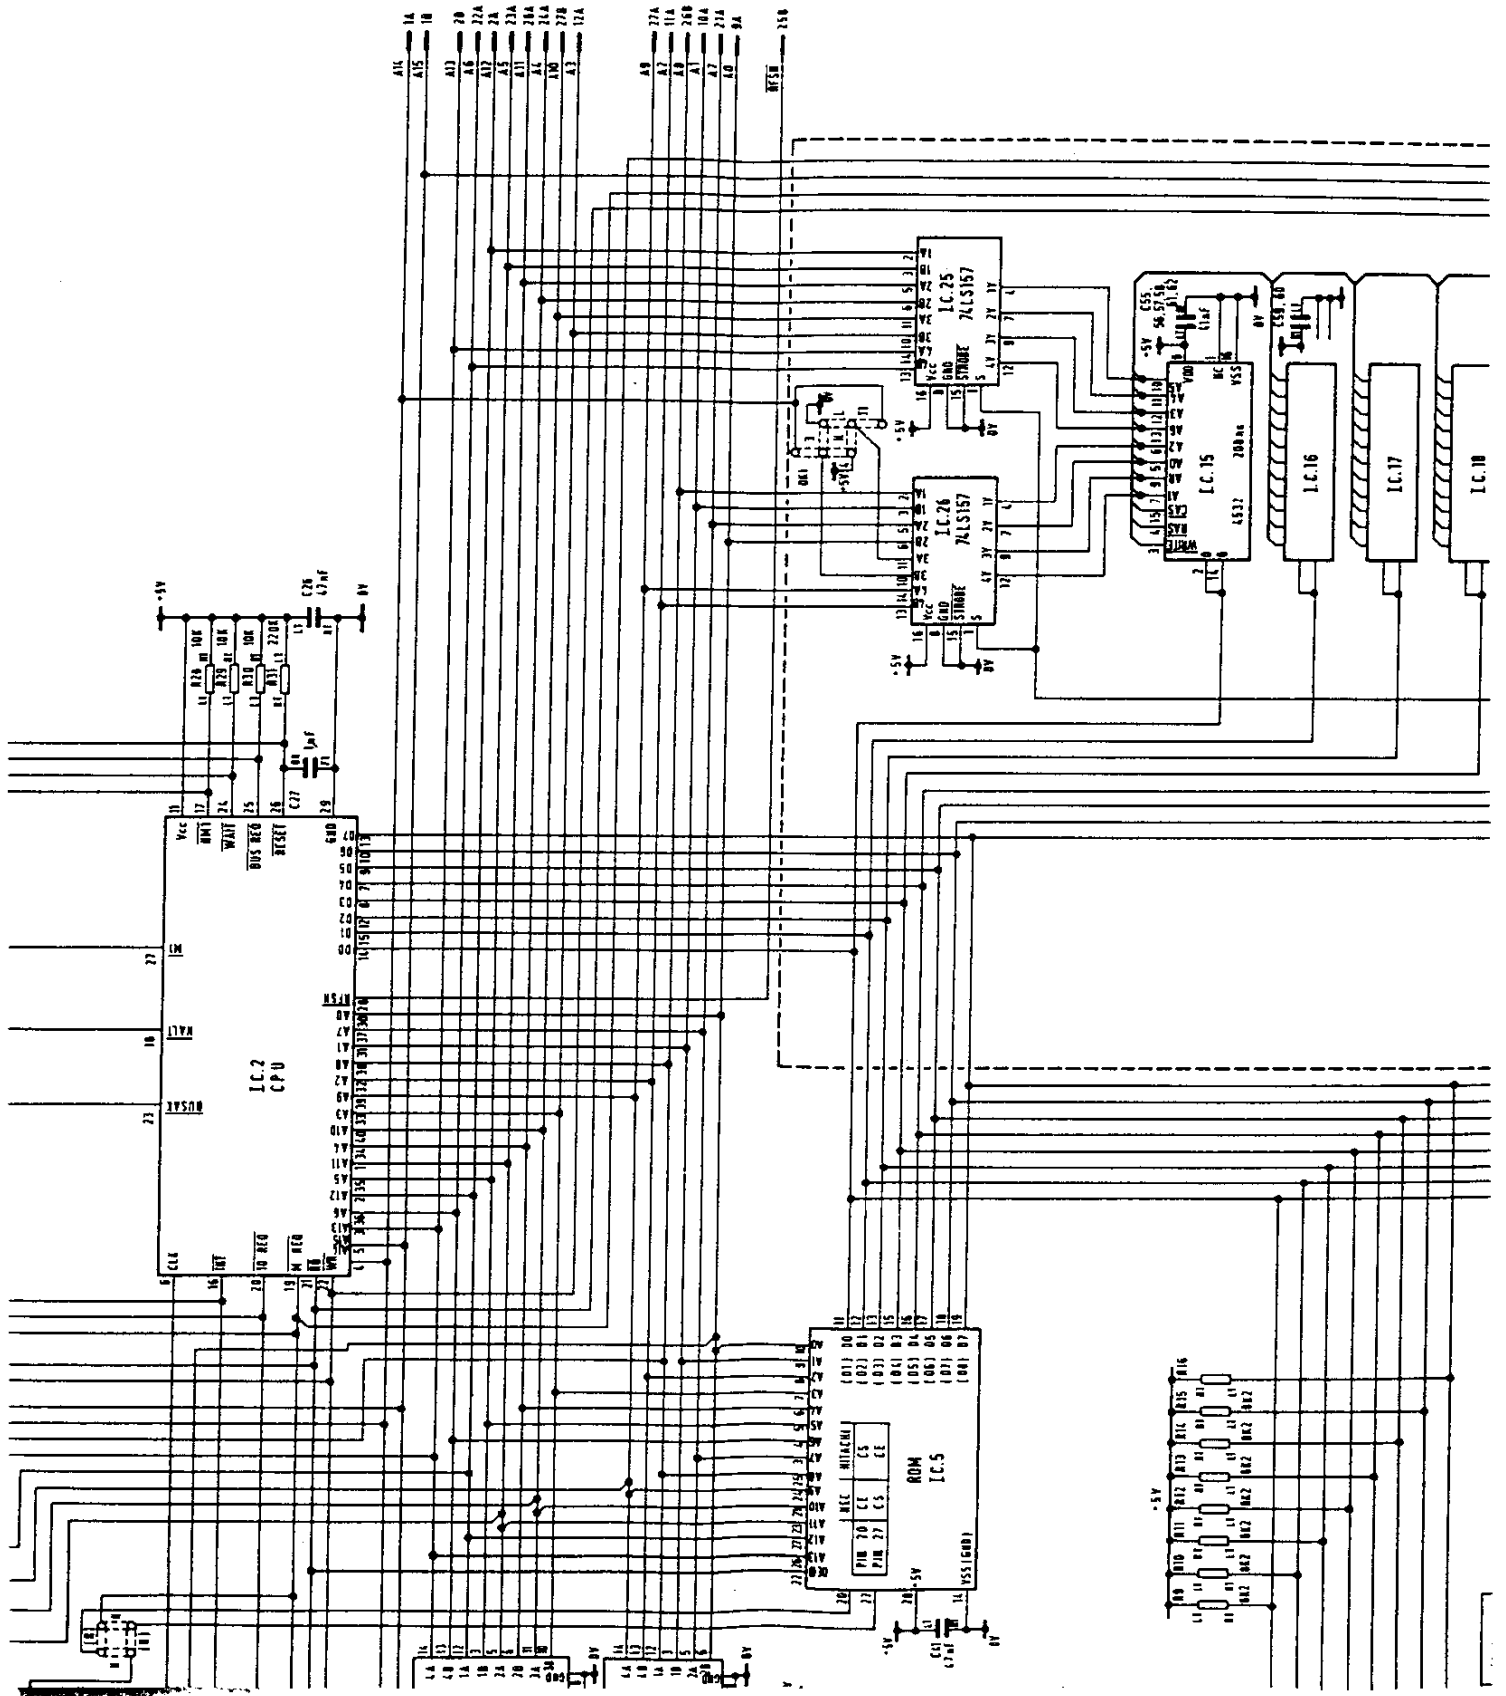

I.C.	GRID REF.
1	7F
2	10B
3	10E
4	10F
5	11H
6	9E
7	8H
8	9H
10	9I
11	9I
12	9I
13	9J
14	6E
15	10I
16	10I
17	10E
18	10E
19	10L
20	10L
21	10M
22	10M
23	10N, 10N, 10N
24	10N, 10N
25	10N

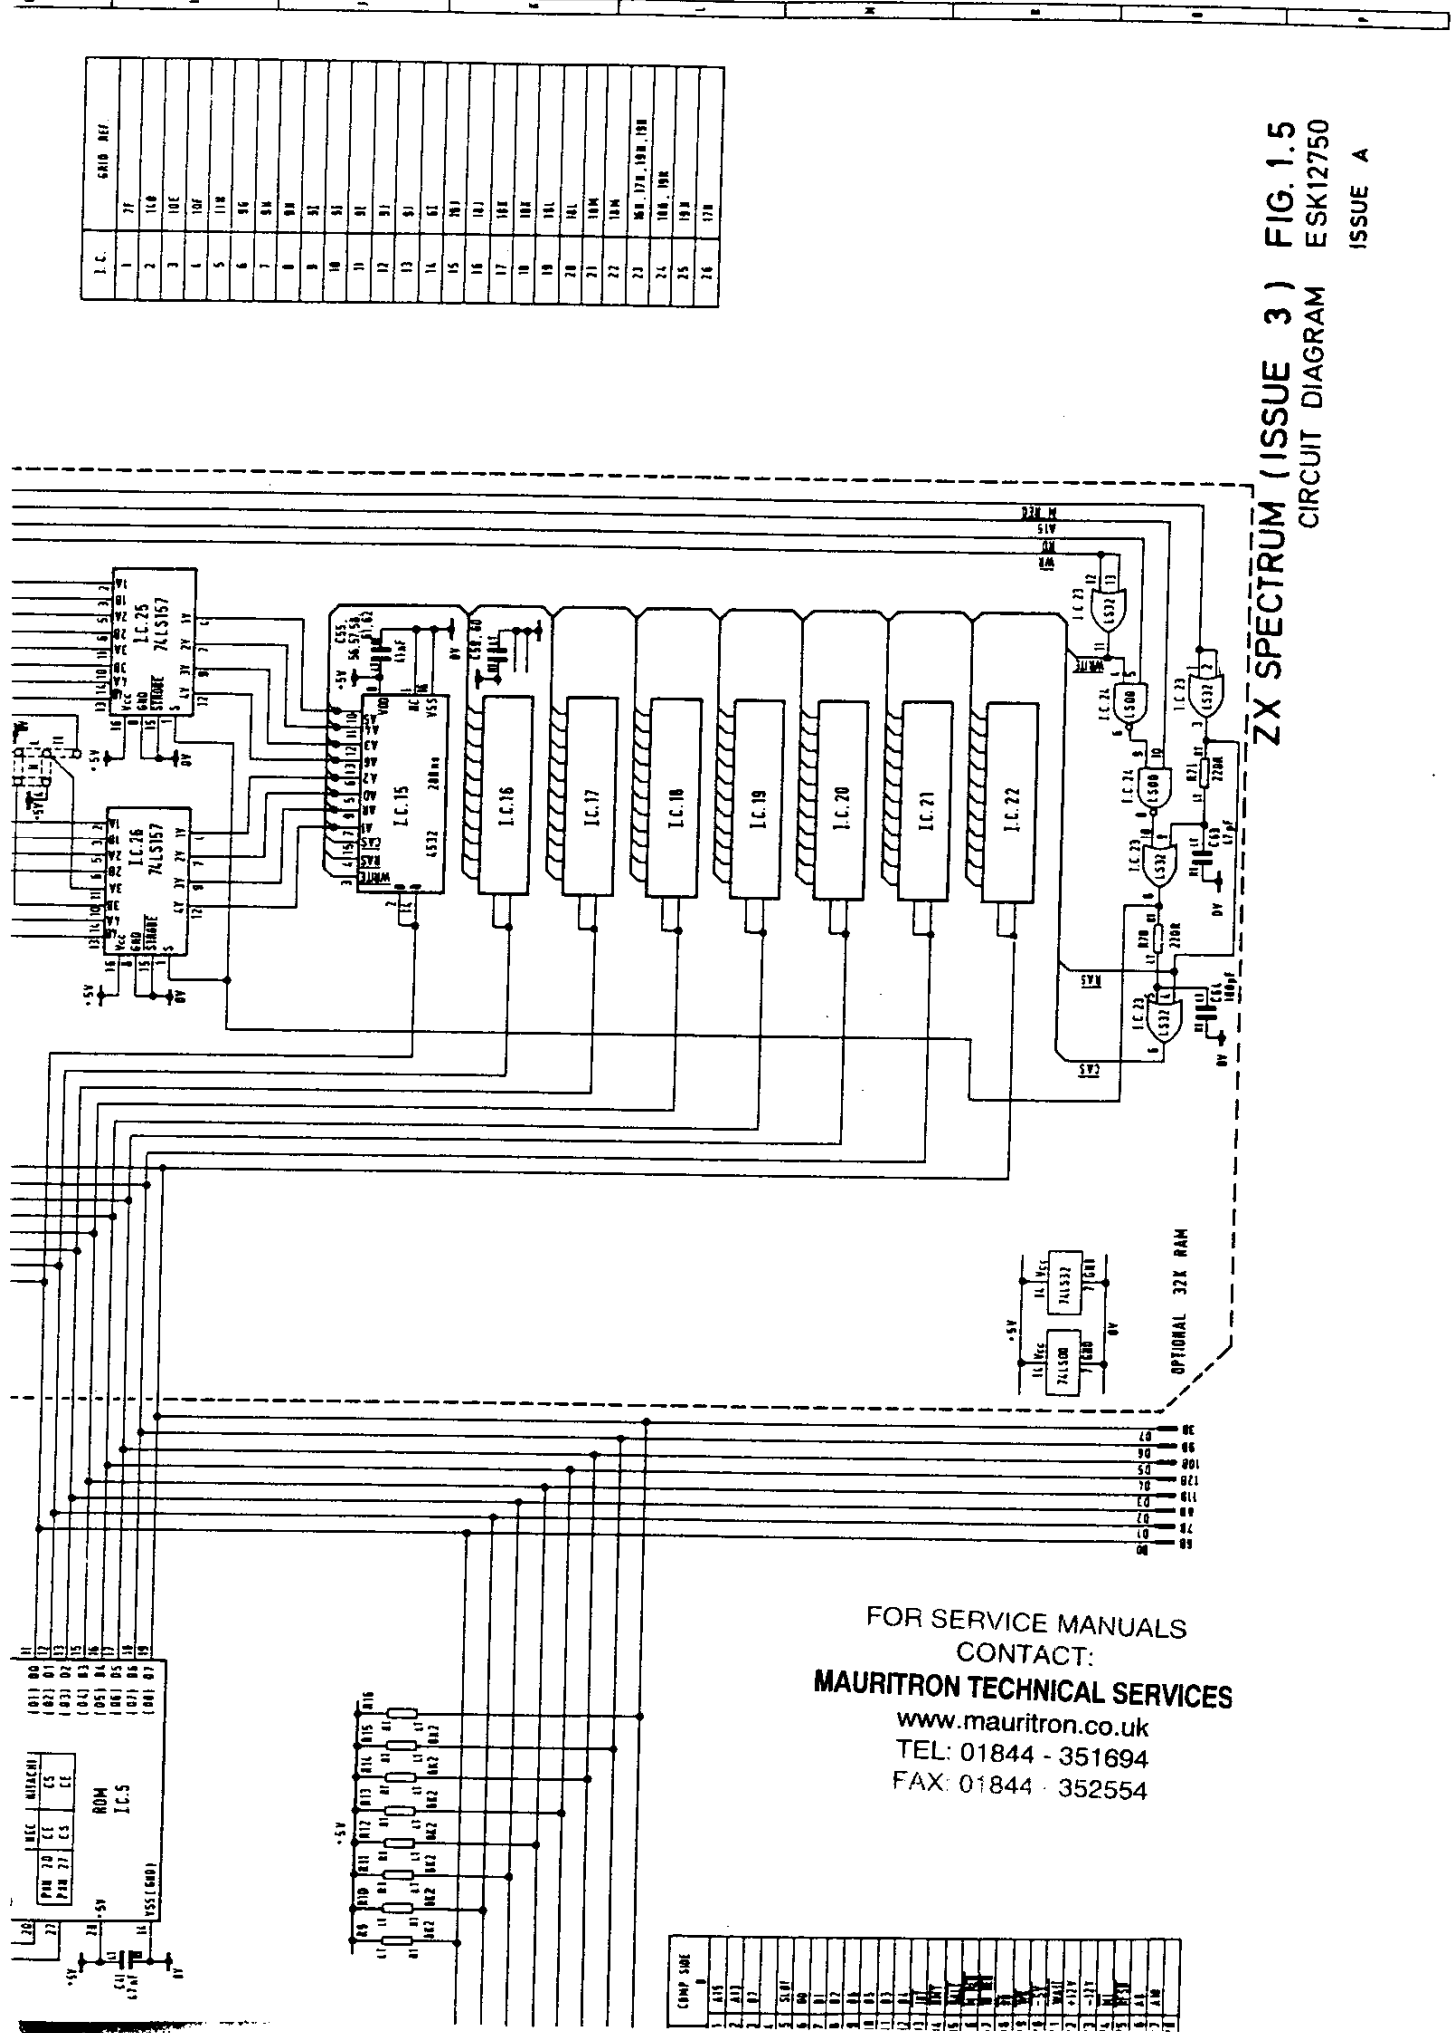


I.C.	GAIO REF
1	27
2	169
3	10E
4	10F
5	11R
6	9E
7	8A
8	8A
9	91
10	91
11	91
12	91
13	91
14	91
15	10J
16	10J
17	10E
18	10E
19	10L
20	10L
21	10M
22	10M
23	80, 170, 190, 190
24	100, 100
25	100
26	120

ZX SPECTRUM (ISSUE 3) FIG. 1.5
CIRCUIT DIAGRAM ESK12750
ISSUE A

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

COMP	SIDE
1	A15
2	A11
3	B7
4	S107
5	B9
6	B7
7	B7
8	B4
9	B3
10	B3
11	B3
12	B3
13	B3
14	B3
15	B3
16	B3
17	B3
18	B3
19	B3
20	B3
21	B3
22	B3
23	B3
24	B3
25	B3
26	B3


MC 27655
 17 JAN 67
 8455

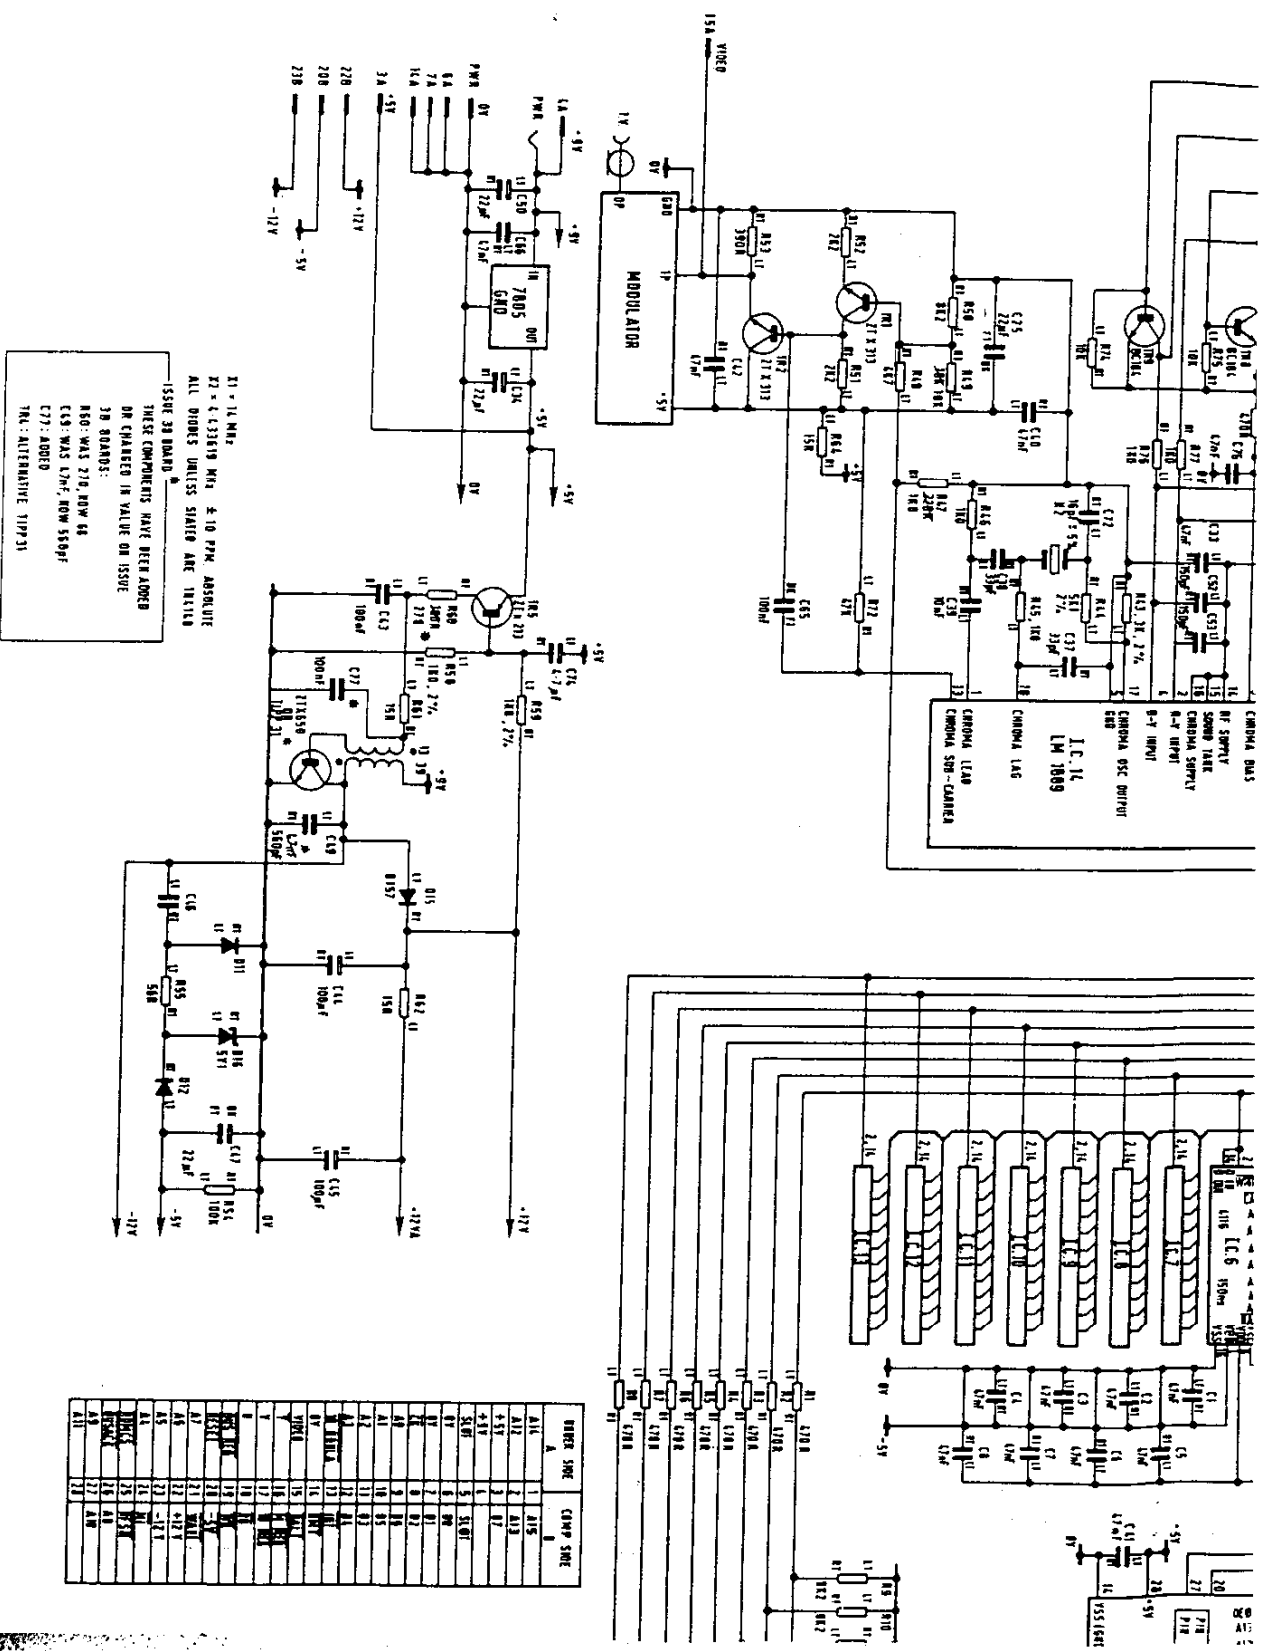


31 - 1% MIN.
 32 - 1% MIN. ± 10 PPM. ABSOLUTE
 ALL DIODES UNLESS SPECIFIED ARE 1N4148
 THESE COMPONENTS HAVE BEEN ADDED
 OR CHANGED IN VALUE ON ISSUE
 ON BOARD:
 R80: WAS 210, NOW 68
 C63: WAS 1.5K, NOW 550PF
 C73: ADDED
 TR1: ALTERNATIVE TIP231

BOARD	SYMBOL	VALUE	COMP. NO.
A1	R15	10K	1
A1	R16	10K	2
A1	R17	10K	3
A1	R18	10K	4
A1	R19	10K	5
A1	R20	10K	6
A1	R21	10K	7
A1	R22	10K	8
A1	R23	10K	9
A1	R24	10K	10
A1	R25	10K	11
A1	R26	10K	12
A1	R27	10K	13
A1	R28	10K	14
A1	R29	10K	15
A1	R30	10K	16
A1	R31	10K	17
A1	R32	10K	18
A1	R33	10K	19
A1	R34	10K	20
A1	R35	10K	21
A1	R36	10K	22
A1	R37	10K	23
A1	R38	10K	24
A1	R39	10K	25
A1	R40	10K	26
A1	R41	10K	27
A1	R42	10K	28
A1	R43	10K	29
A1	R44	10K	30
A1	R45	10K	31
A1	R46	10K	32
A1	R47	10K	33
A1	R48	10K	34
A1	R49	10K	35
A1	R50	10K	36
A1	R51	10K	37
A1	R52	10K	38
A1	R53	10K	39
A1	R54	10K	40
A1	R55	10K	41
A1	R56	10K	42
A1	R57	10K	43
A1	R58	10K	44
A1	R59	10K	45
A1	R60	10K	46
A1	R61	10K	47
A1	R62	10K	48
A1	R63	10K	49
A1	R64	10K	50
A1	R65	10K	51
A1	R66	10K	52
A1	R67	10K	53
A1	R68	10K	54
A1	R69	10K	55
A1	R70	10K	56
A1	R71	10K	57
A1	R72	10K	58
A1	R73	10K	59
A1	R74	10K	60
A1	R75	10K	61
A1	R76	10K	62
A1	R77	10K	63
A1	R78	10K	64
A1	R79	10K	65
A1	R80	10K	66
A1	R81	10K	67
A1	R82	10K	68
A1	R83	10K	69
A1	R84	10K	70
A1	R85	10K	71
A1	R86	10K	72
A1	R87	10K	73
A1	R88	10K	74
A1	R89	10K	75
A1	R90	10K	76
A1	R91	10K	77
A1	R92	10K	78
A1	R93	10K	79
A1	R94	10K	80
A1	R95	10K	81
A1	R96	10K	82
A1	R97	10K	83
A1	R98	10K	84
A1	R99	10K	85
A1	R100	10K	86
A1	R101	10K	87
A1	R102	10K	88
A1	R103	10K	89
A1	R104	10K	90
A1	R105	10K	91
A1	R106	10K	92
A1	R107	10K	93
A1	R108	10K	94
A1	R109	10K	95
A1	R110	10K	96
A1	R111	10K	97
A1	R112	10K	98
A1	R113	10K	99
A1	R114	10K	100

MC 7711

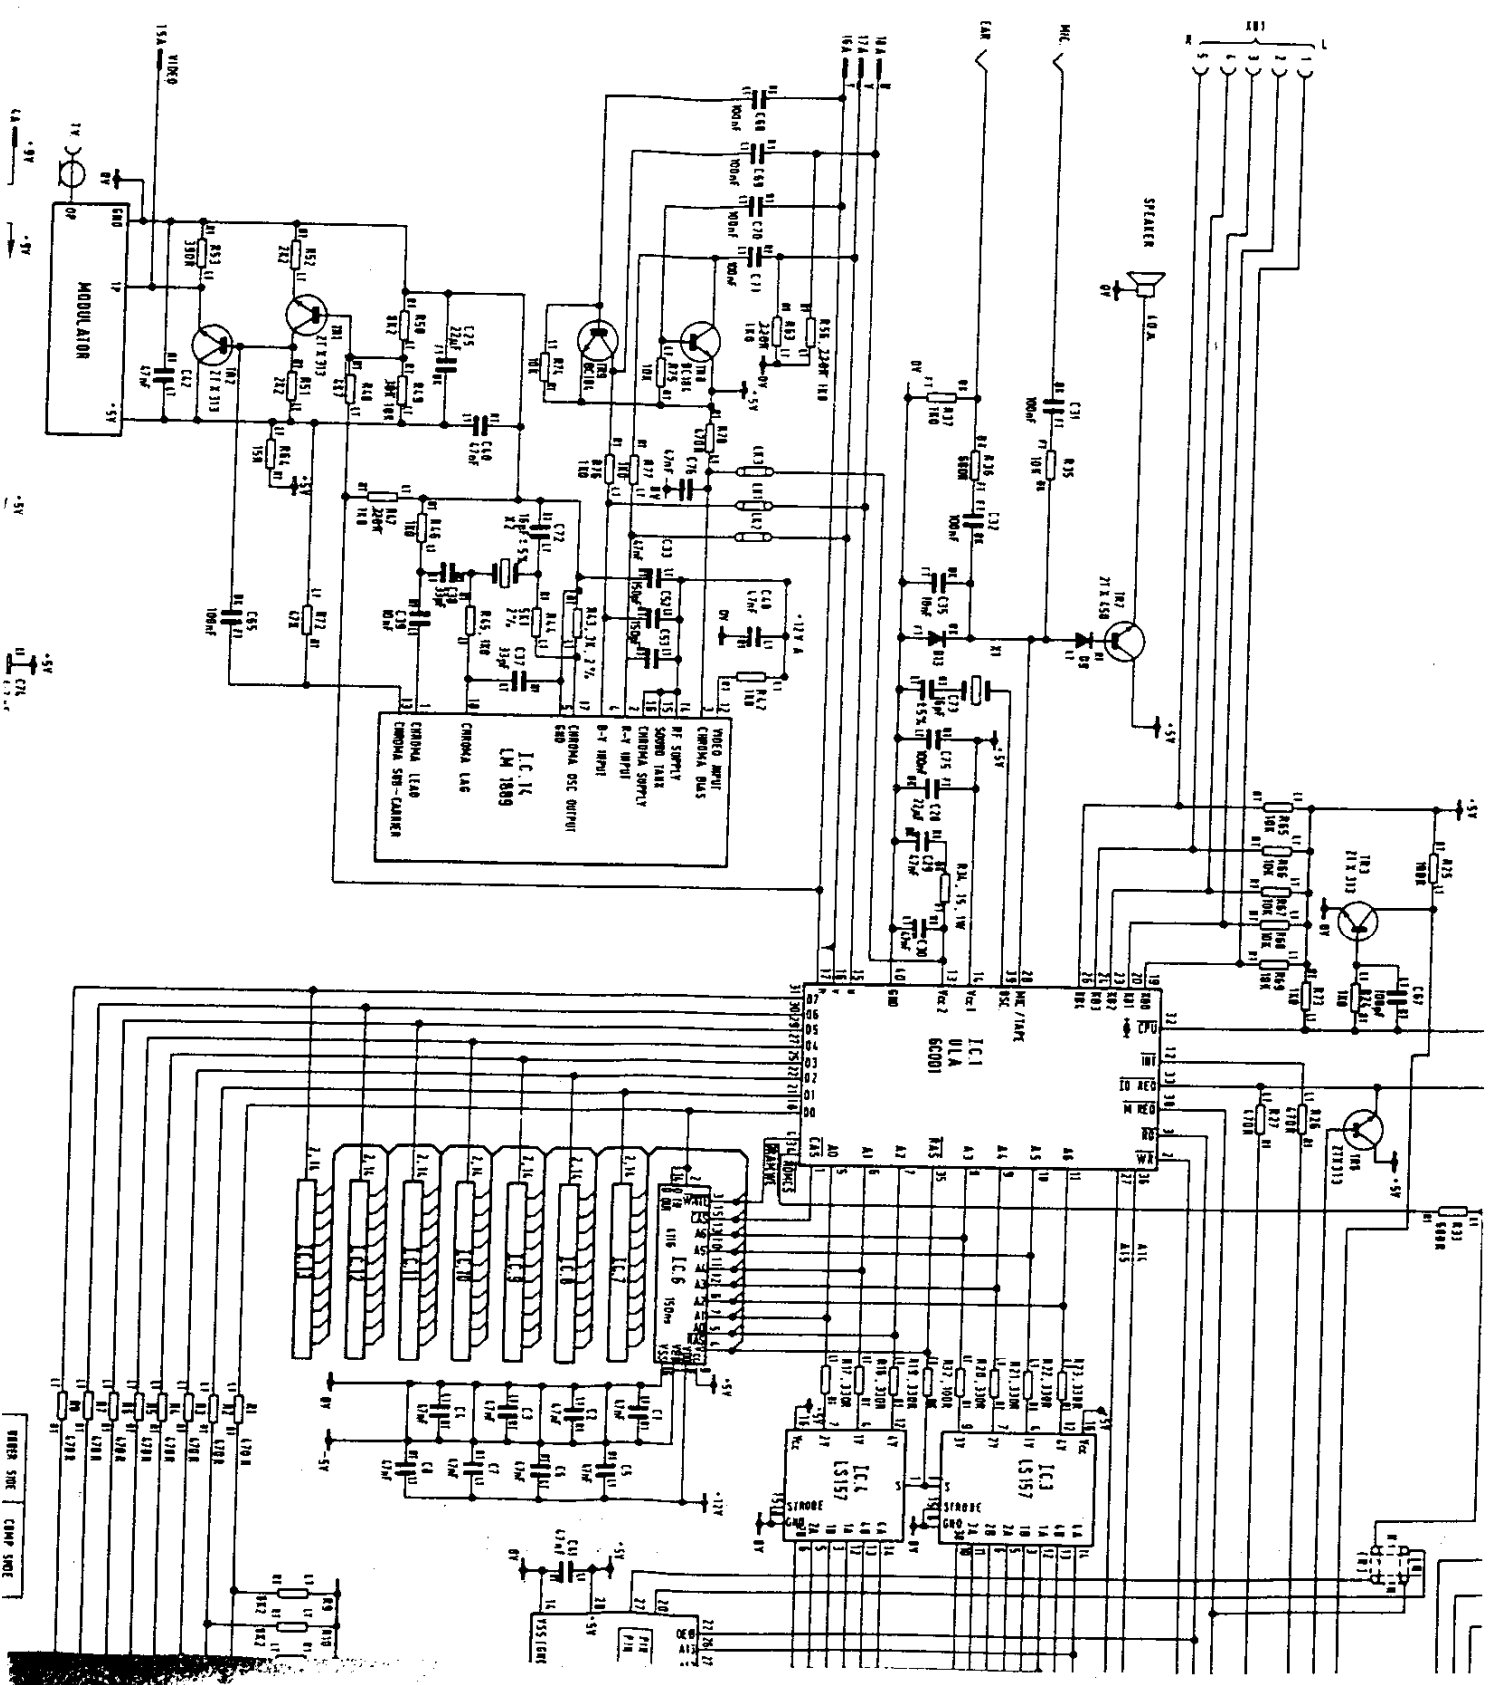

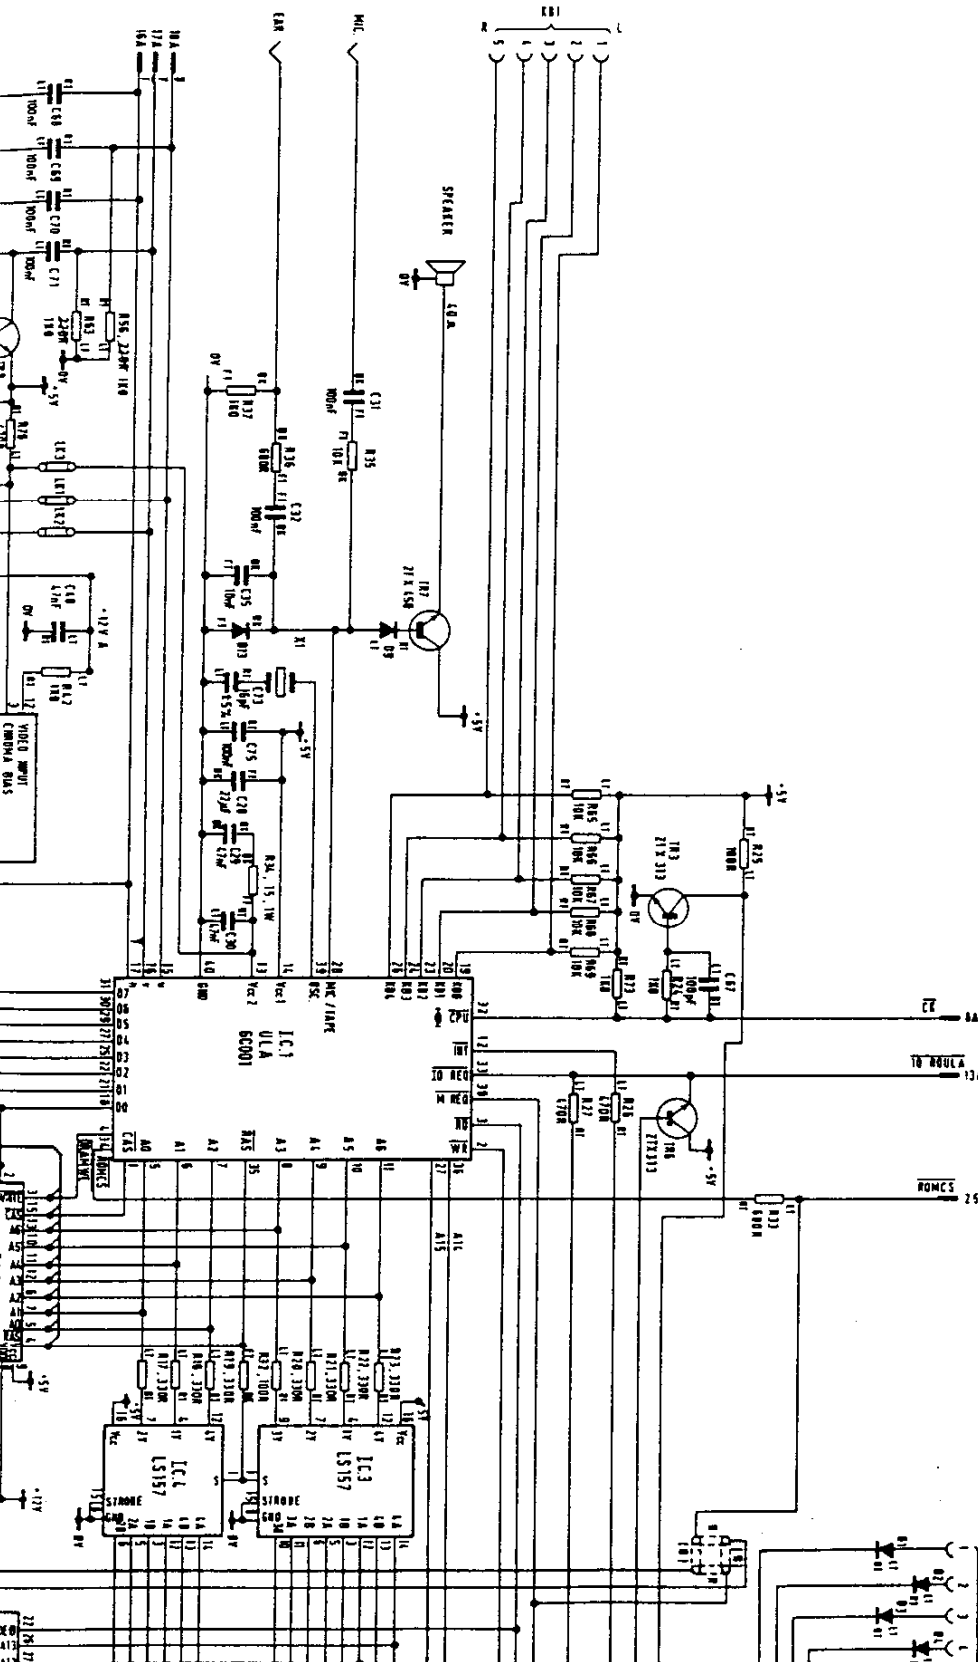



CONSTR.	MODULATION	CAL.	CAL.	CAL.	21.	CAL.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.	12.
52	56	31	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49
53	50	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69
88	90	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107
108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125

CONSTR. MODULATION CAL. CAL. CAL. 21. CAL. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12.

(C.A.B.)



NOTE
 * THE VALUES OF THESE RESISTORS WILL VARY
 ACCORDING TO THE BUILD STANDARD (SEE
 PARTS LIST AND MODIFICATION INSTRUCTIONS)

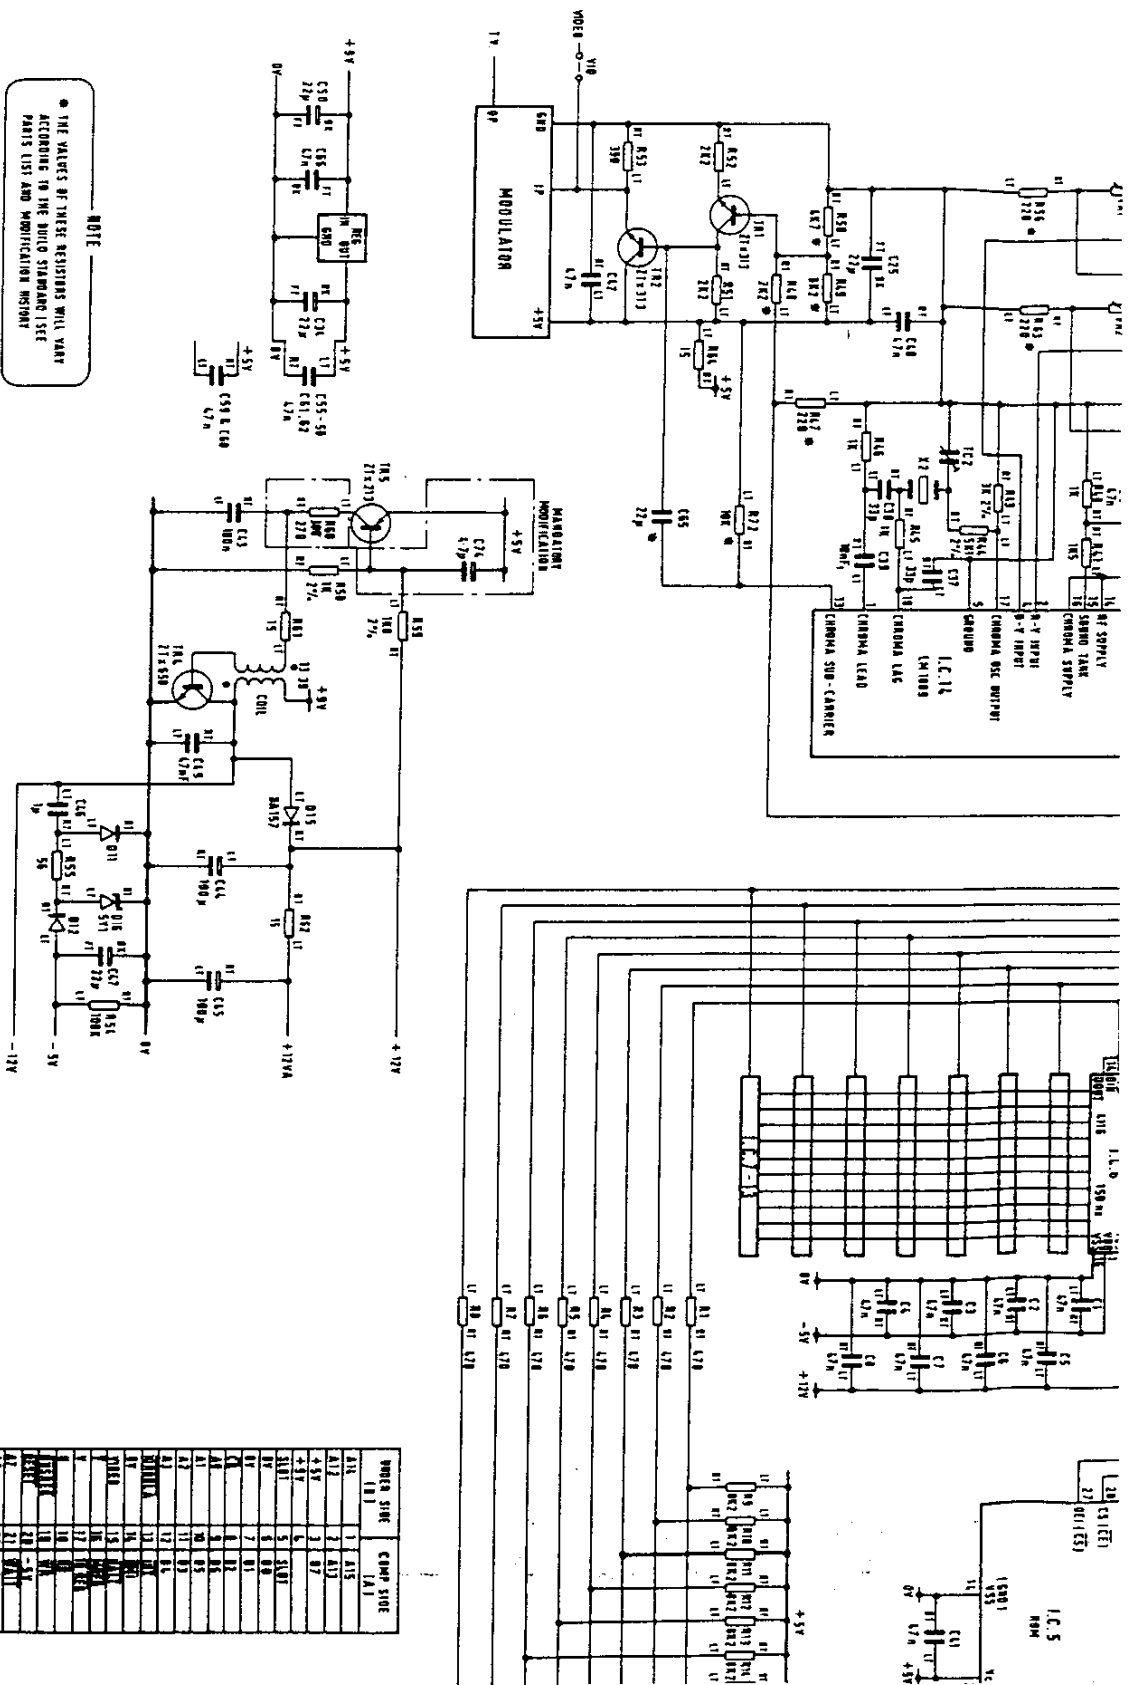


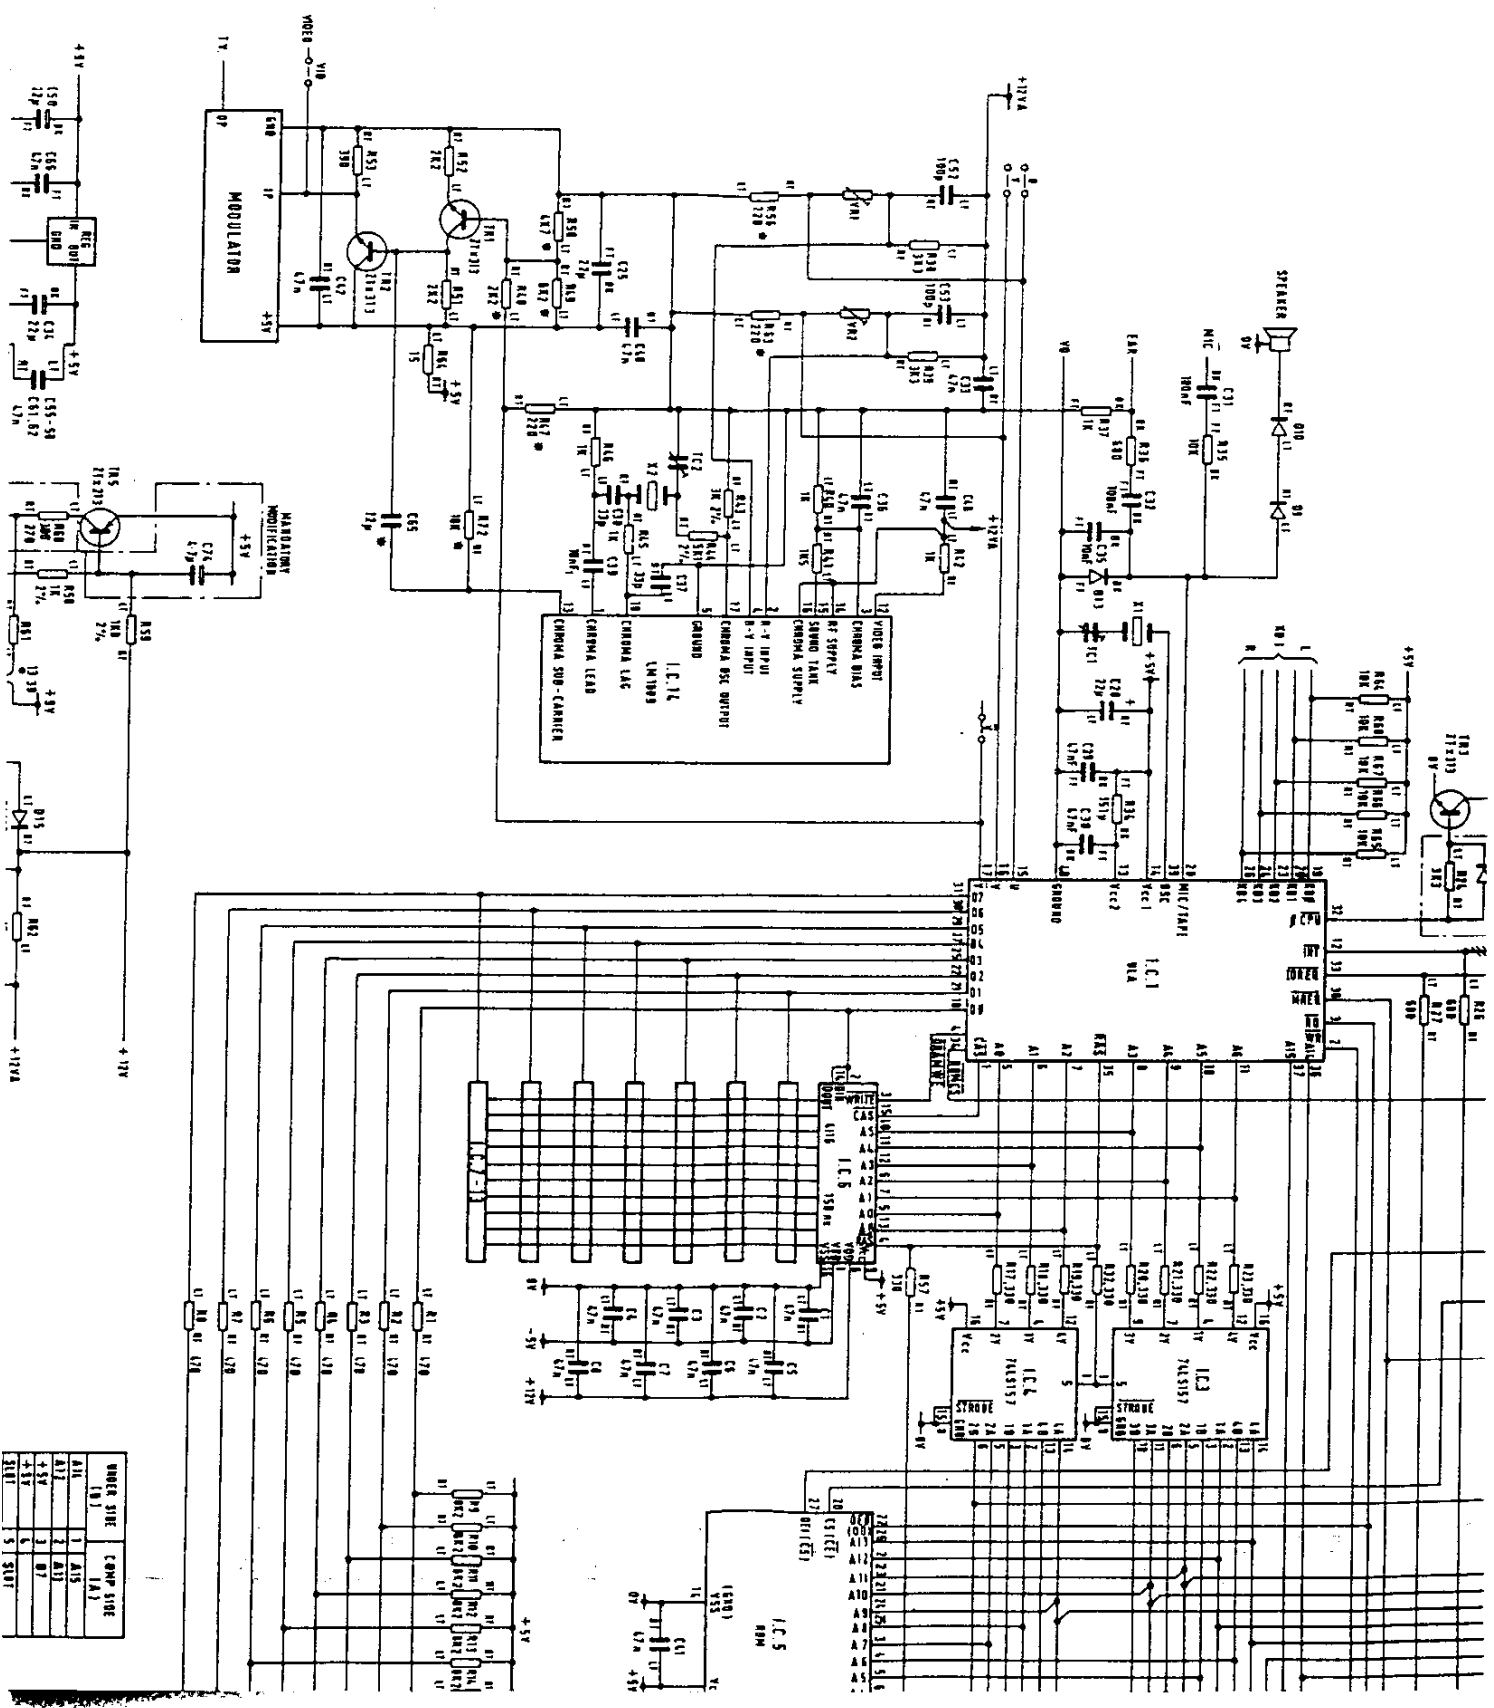

BOARD SIDE	COMP SIDE
A11	A15
A17	A13
+5V	A7
+5V	A
5	5


101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200.

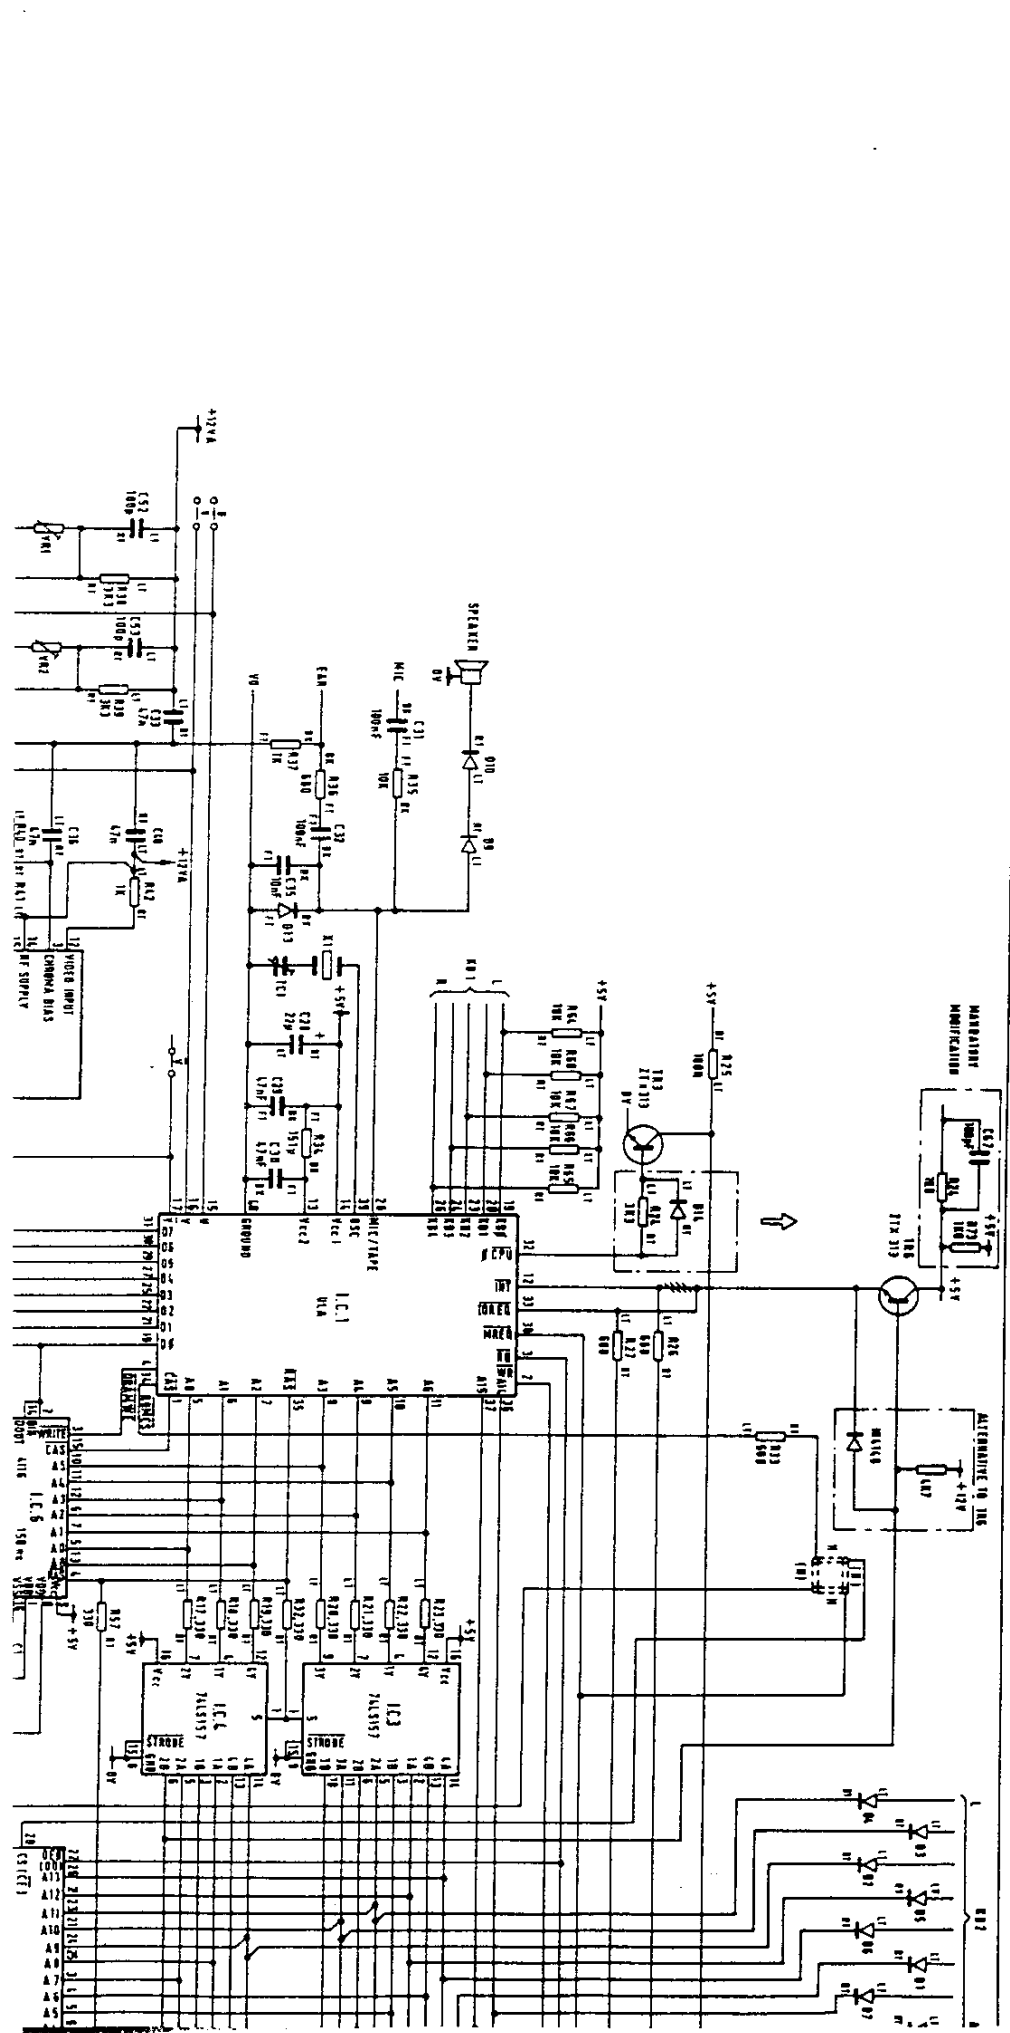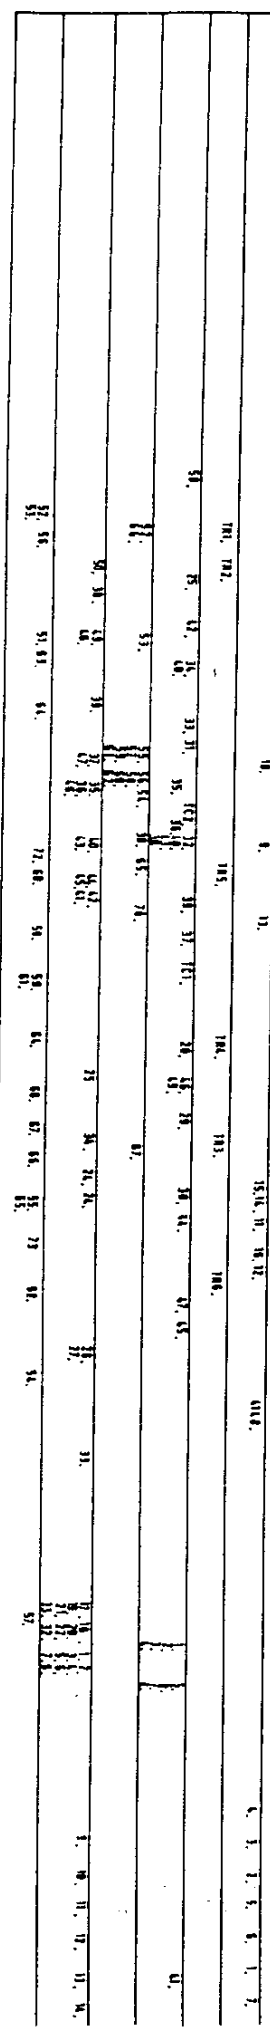

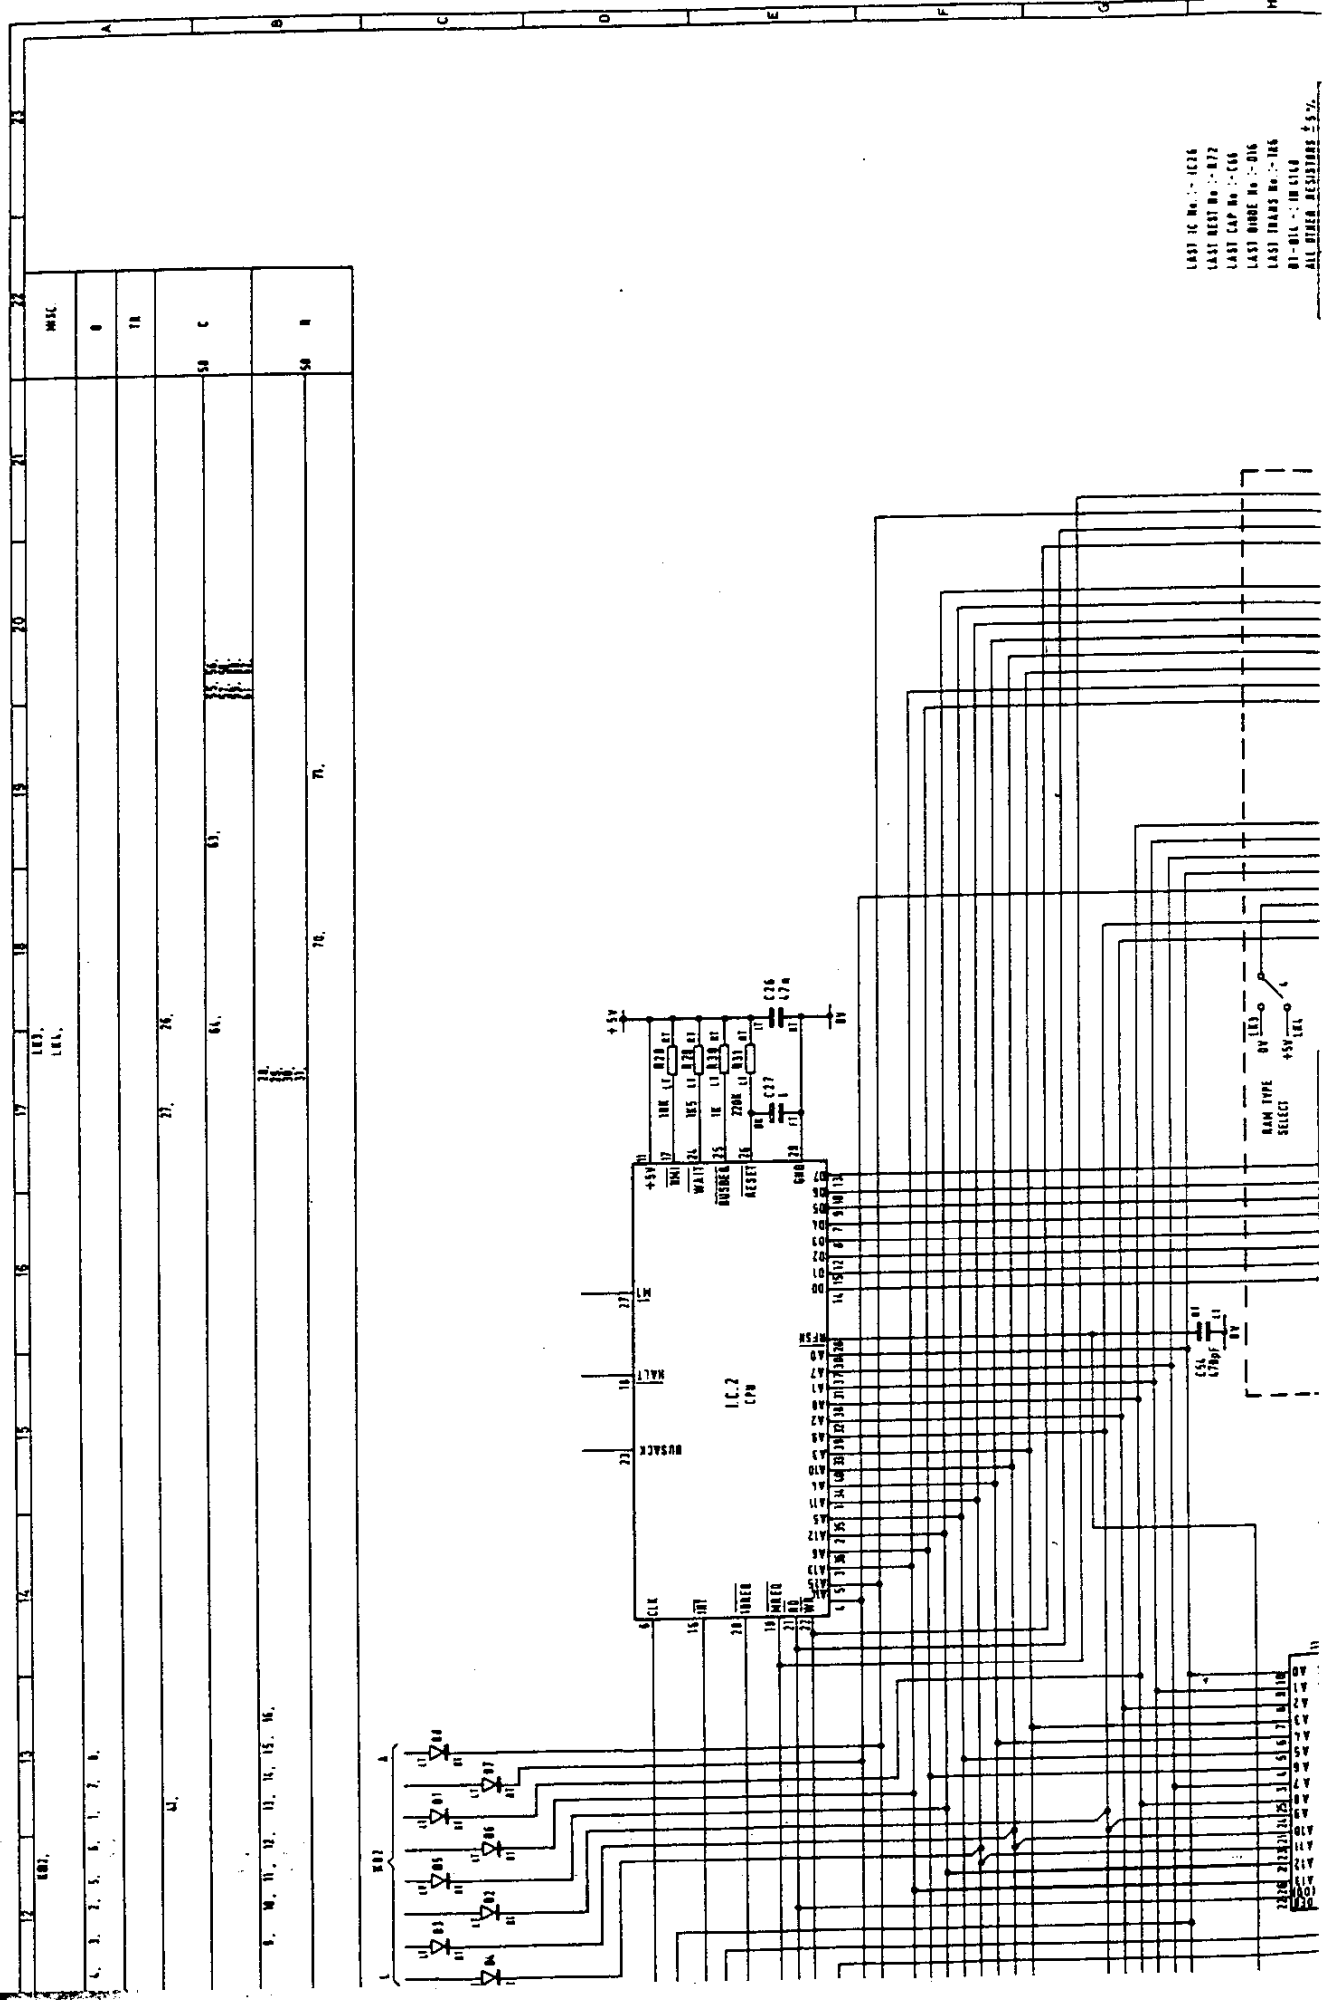

| 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | MISC. |
|----------------------------|----|----|----|----|----|----|----|----|----|----|-------|
| LEU. | | | | | | | | | | | 0 |
| C. 1. 2. 3. 4. 5. 6. 7. 8. | | | | | | | | | | | 1A |
| 31. | | | | | | | | | | | 5A C |
| 61. | | | | | | | | | | | 5A H |
| 9. W. 10. 11. 12. 13. 14. | | | | | | | | | | | |
| 70. | | | | | | | | | | | |
| 71. | | | | | | | | | | | |

LAST IC NO. : IC16
 LAST TEST NO. : 072
 LAST CAP NO. : 04
 LAST ORDER NO. : 016
 LAST TRANS NO. : 186
 01-BUL-10-1110
 ALL OTHER RESOURCES : 5. 7.

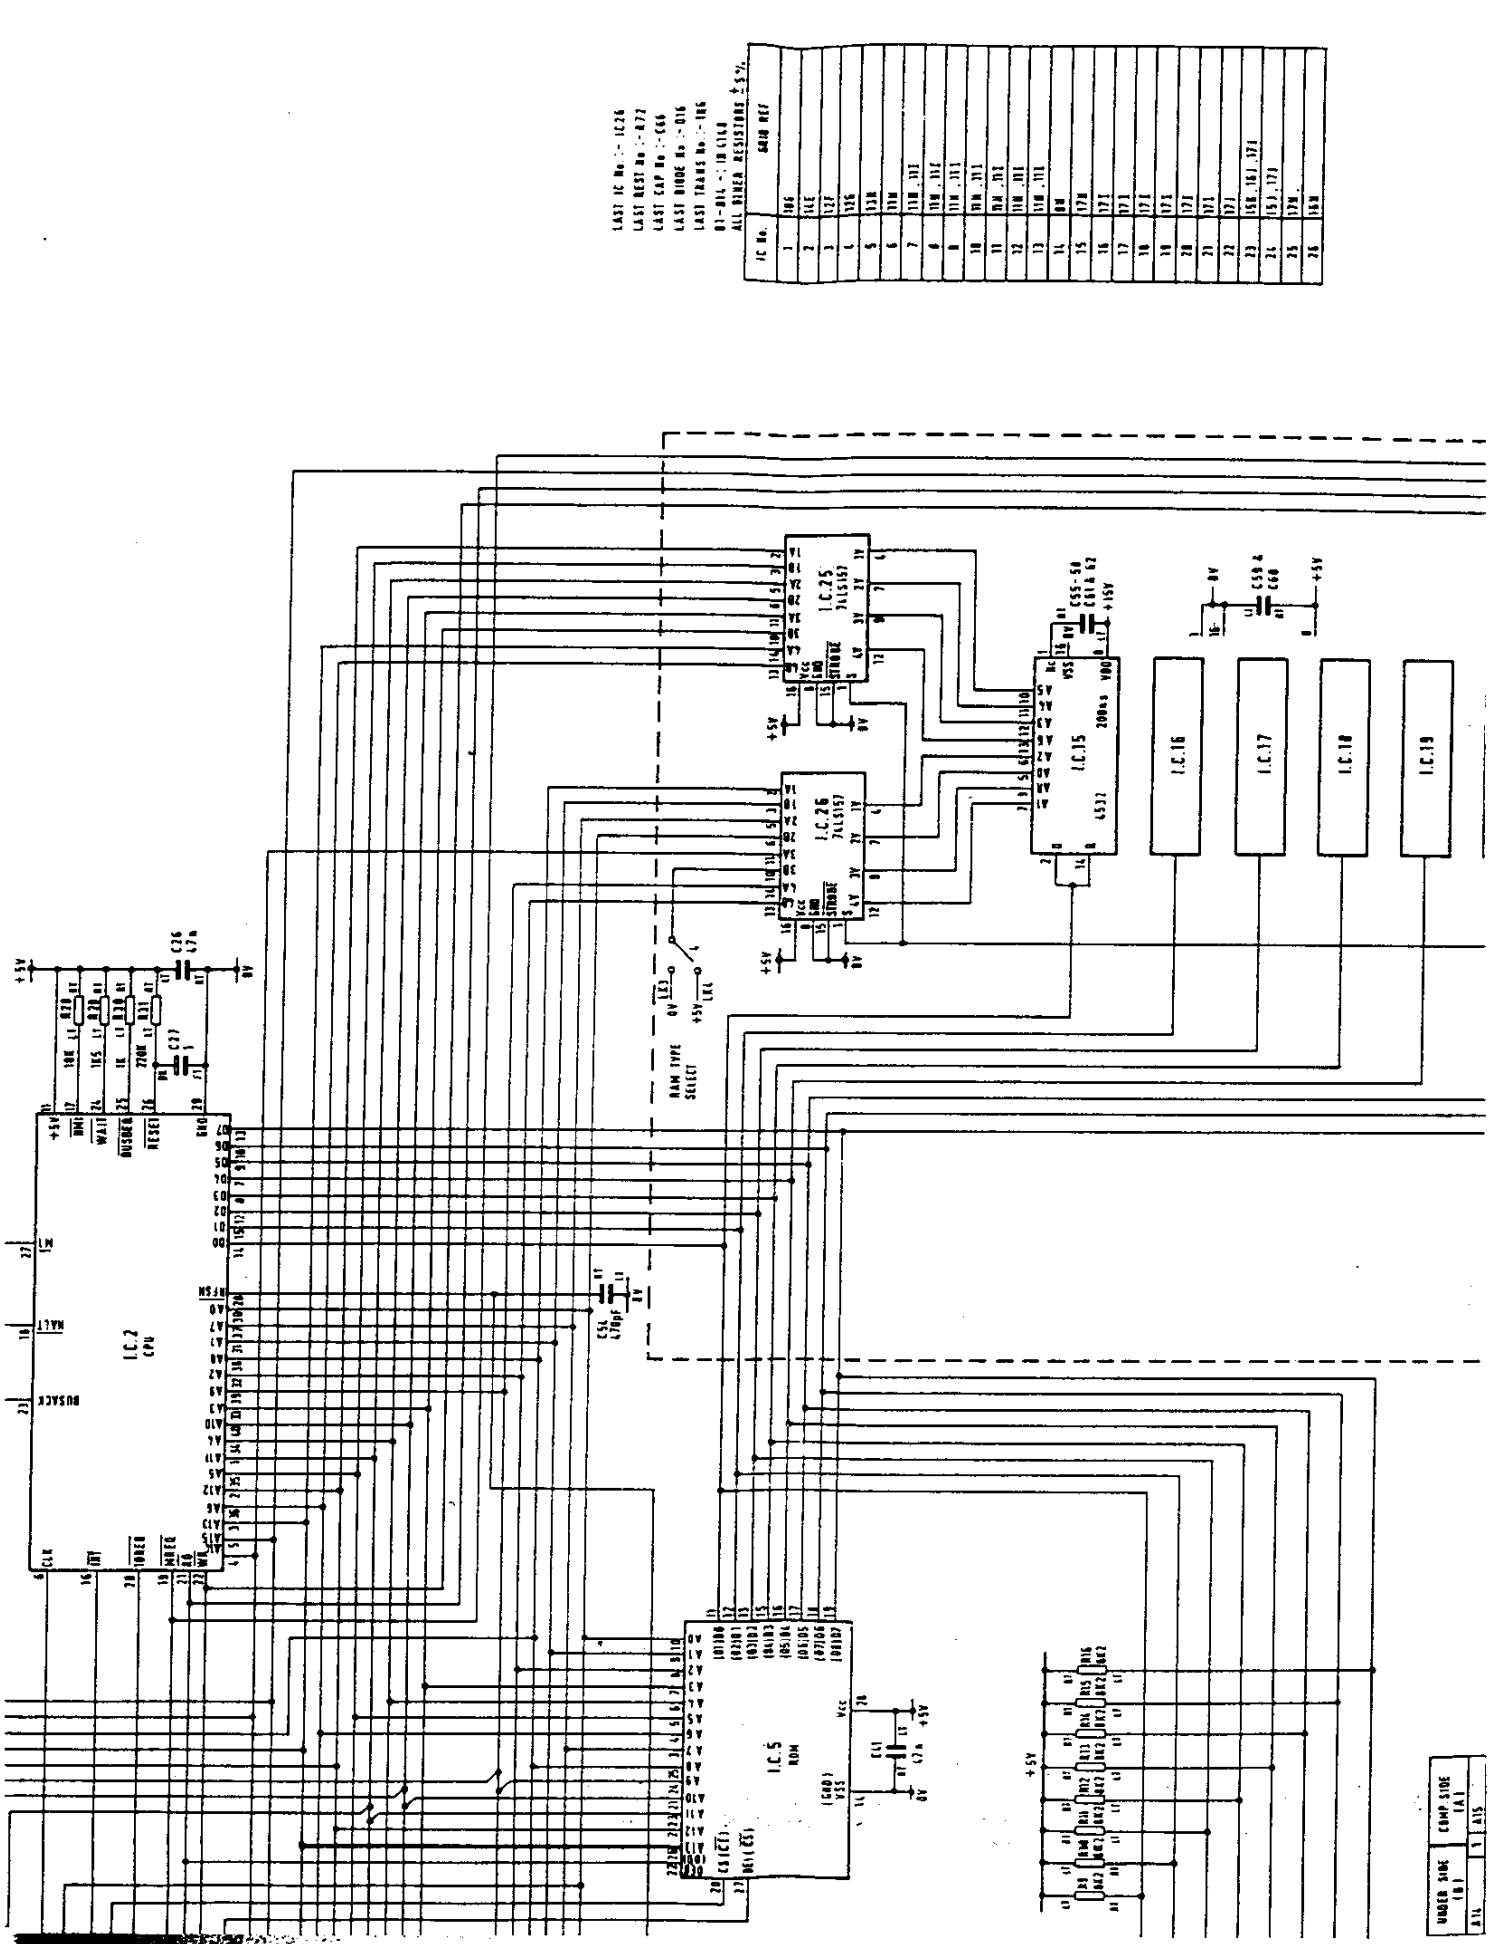


LAST IC No. :- 1026
 LAST TEST No. :- 077
 LAST CAP No. :- 066
 LAST BIRD No. :- 016
 LAST TRANS No. :- 186
 BT - 016 - 10 0160
 ALL BINARY RESISTORS 5%

| IC No. | RAM REF |
|--------|---------|
| 1 | 100 |
| 2 | 101 |
| 3 | 102 |
| 4 | 103 |
| 5 | 104 |
| 6 | 105 |
| 7 | 106 |
| 8 | 107 |
| 9 | 108 |
| 10 | 109 |
| 11 | 110 |
| 12 | 111 |
| 13 | 112 |
| 14 | 113 |
| 15 | 114 |
| 16 | 115 |
| 17 | 116 |
| 18 | 117 |
| 19 | 118 |
| 20 | 119 |
| 21 | 120 |
| 22 | 121 |
| 23 | 122 |
| 24 | 123 |
| 25 | 124 |
| 26 | 125 |

| UNDER SIDE | COMP SIDE |
|------------|-----------|
| 101 | 101 |
| 102 | 102 |

| IC No. | 6400 REF |
|--------|----------|
| 1 | 74LS05 |
| 2 | 74LS05 |
| 3 | 74LS05 |
| 4 | 74LS05 |
| 5 | 74LS05 |
| 6 | 74LS05 |
| 7 | 74LS05 |
| 8 | 74LS05 |
| 9 | 74LS05 |
| 10 | 74LS05 |
| 11 | 74LS05 |
| 12 | 74LS05 |
| 13 | 74LS05 |
| 14 | 74LS05 |
| 15 | 74LS05 |
| 16 | 74LS05 |
| 17 | 74LS05 |
| 18 | 74LS05 |
| 19 | 74LS05 |
| 20 | 74LS05 |
| 21 | 74LS05 |
| 22 | 74LS05 |
| 23 | 74LS05 |
| 24 | 74LS05 |
| 25 | 74LS05 |
| 26 | 74LS05 |

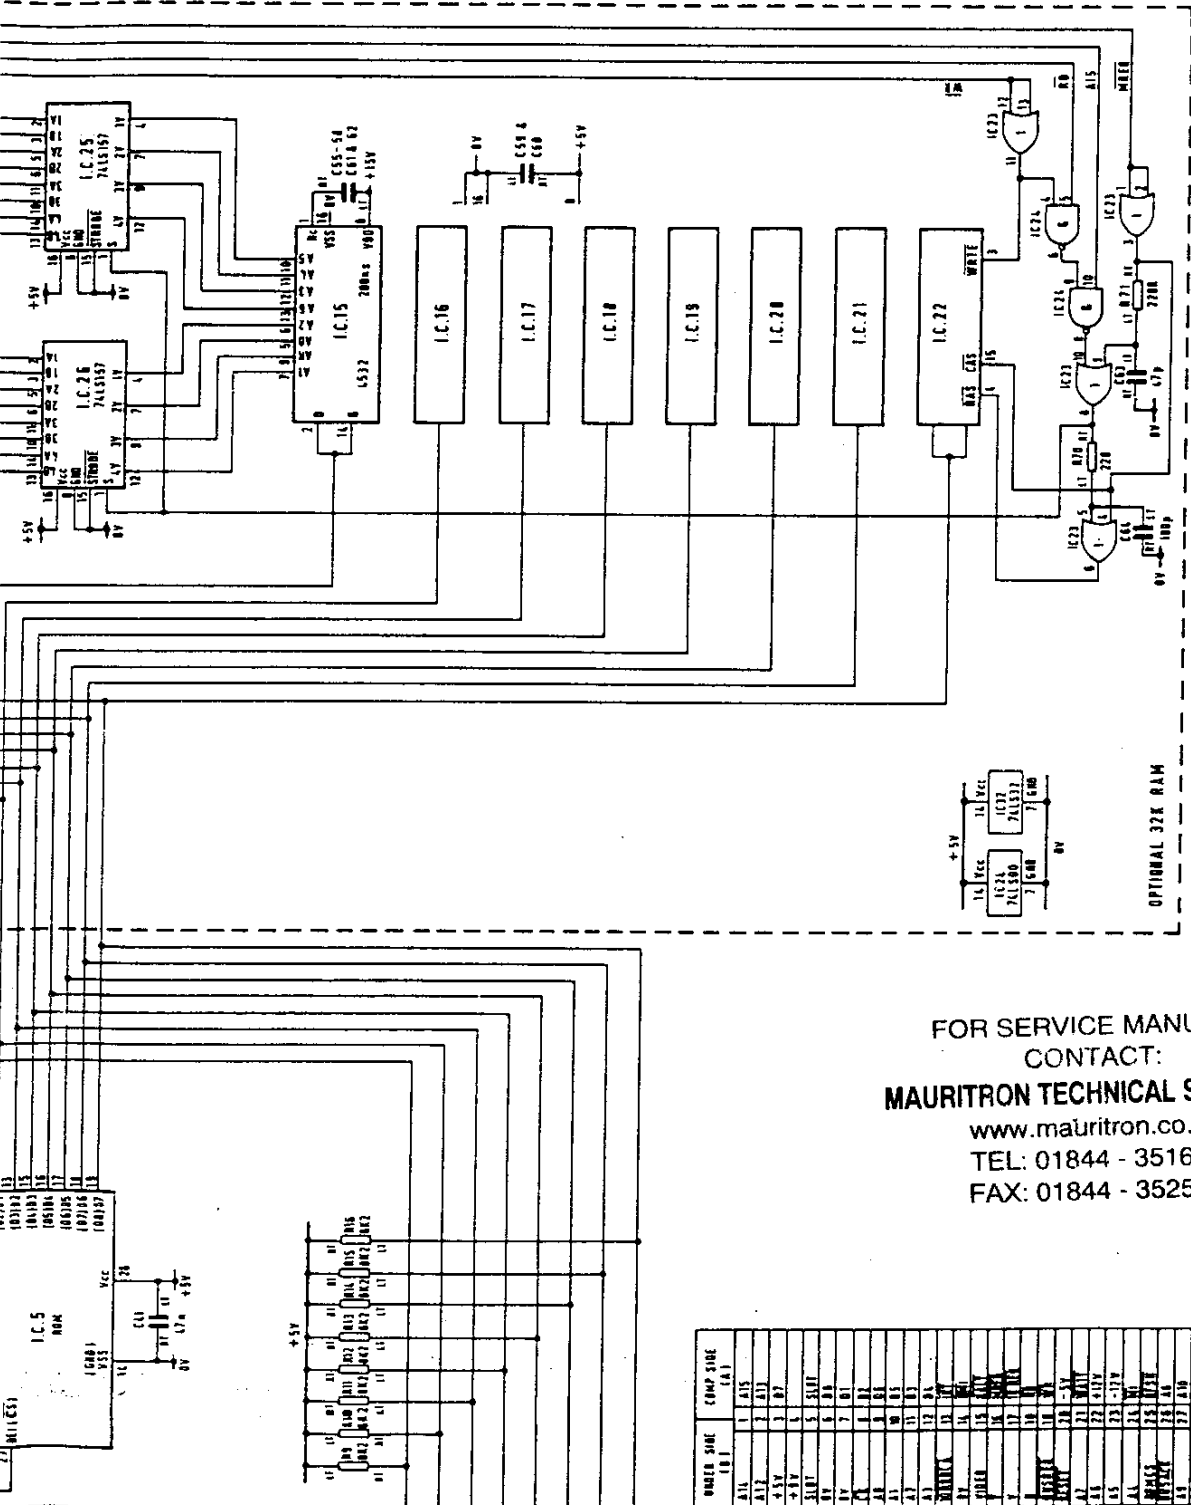

ZX SPECTRUM (ISSUE 2) FIG. 1.4
 CIRCUIT DIAGRAM ESK 12740
 ISSUE 1A

FOR SERVICE MANUALS
 CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
 TEL: 01844 - 351694
 FAX: 01844 - 352554

| ORDER SIDE (01) | COMP. SIDE (02) |
|-----------------|-----------------|
| A1 | 1 |
| A2 | 2 |
| A3 | 3 |
| A4 | 4 |
| A5 | 5 |
| A6 | 6 |
| A7 | 7 |
| A8 | 8 |
| A9 | 9 |
| A10 | 10 |
| A11 | 11 |
| A12 | 12 |
| A13 | 13 |
| A14 | 14 |
| A15 | 15 |
| A16 | 16 |
| A17 | 17 |
| A18 | 18 |
| A19 | 19 |
| A20 | 20 |
| A21 | 21 |
| A22 | 22 |
| A23 | 23 |
| A24 | 24 |
| A25 | 25 |
| A26 | 26 |
| A27 | 27 |
| A28 | 28 |
| A29 | 29 |
| A30 | 30 |
| A31 | 31 |
| A32 | 32 |